


http://130.149.60.45/~farbmetrik/TE79/TE79LONI.TXT /PS; start output
N: no 3D-linearization (OL) in file (F) or PS-startup (S), page 1/1


see similar files: http://130.149.60.45/~farbmetrik/TE79/TE79.HTM
technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik

TUB registration: 20130201-TE79/TE79LONI.TXT /PS
application for measurement of laser printer output


TUB material: code=rhata




radial gratings (Siemens-stars) N-W



radial gratings (Siemens-stars) W-N



radial gratings (Siemens-stars) N-Z



radial gratings (Siemens-stars) W-Z

TE790-3, Picture C1W--: Element A: radial gratings N-W, W-N, N-Z and W-Z; PS operator: rgb/cmy0

L^*/Y_{input}
(absolute)

18.0/2.5	37.3/9.7	56.7/24.6	76.1/49.9	95.4/88.6	N_0 (min.)	W_I (max.)
----------	----------	-----------	-----------	-----------	--------------	--------------

$w^* = \tilde{L}^*_{CIE,LAB,r}$
 w^*_{input}

0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_I (max.)
-------	-------	-------	-------	-------	--------------	--------------

TE790-5, Picture C2W--: Element B: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: rgb/cmy0

L^*/Y_{input}
(absolute)

18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.3	69.6/40.2	74.8/47.9	79.9/56.5	85.1/66.2	90.2/76.8	95.4/88.6
----------	----------	----------	----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------

No. and Hex code

00:F	01:E	02:D	03:C	04:B	05:A	06:9	07:8	08:7	09:6	10:5	11:4	12:3	13:2	14:1	15:0
------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------

$w^* = \tilde{L}^*_{CIE,LAB,r}$
 w^*_{input}

0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------


TE790-7, Picture C3W--: Element C: 16 visual equidistant L^* -grey steps; PS operator: rgb/cmy0

test chart TE79; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: w/rgb/cmyk -> w/rgb/cmyk
achromatic test chart N output: no change


background step 0 1 ring step 0-1
Hex code 7 8 Hex code 7-8
E F E-F
2 0 2-0
8 6 8-6
F D F-D

Landolt-rings W-N code: background-ring

TE791-1, Picture C4W--: Element D: Landolt-rings W-N; PS operator: rgb/cmy0

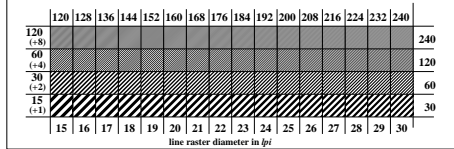

TE791-3, Picture C5W--: Element E: Line raster under 45° (or 135°); PS operator: rgb/cmy0

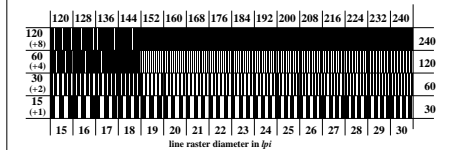

TE791-5, Picture C6W--: Element F: Line raster under 90° (or 0°); PS operator: rgb/cmy0

