



http://130.149.60.45/~farbmetrik/TN73/TN73L0NP.PDF /.PS; overføring output  
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 2/2

se lignende filer: http://130.149.60.45/~farbmetrik/TN73/TN73.HTM  
teknisk informasjon: http://www.ps.bam.de eller http://130.149.60.45/~farbmetrik


TUB registrering: 20150901-TN73/TN73L0NP.PDF /.PS  
anvendelse for måling av offsettrykk output, separasjon cmyk6 (CMYK)  
TUB-material: code=rh4ta

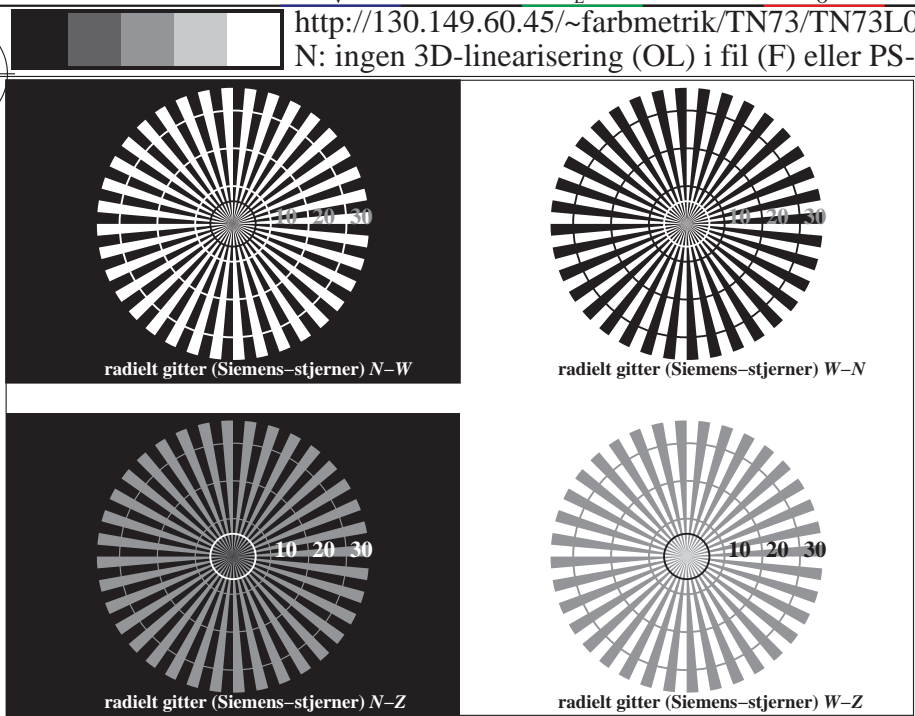


TN730-3, Figur C1Wd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: rgb/cmy0

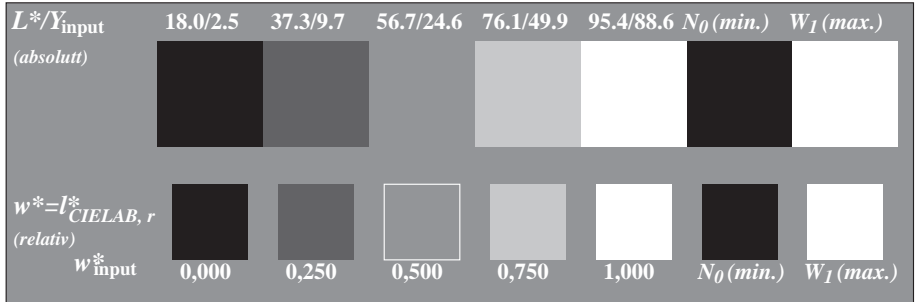


TN730-5, Figur C2Wd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_1$ ; PS operator: rgb/cmy0

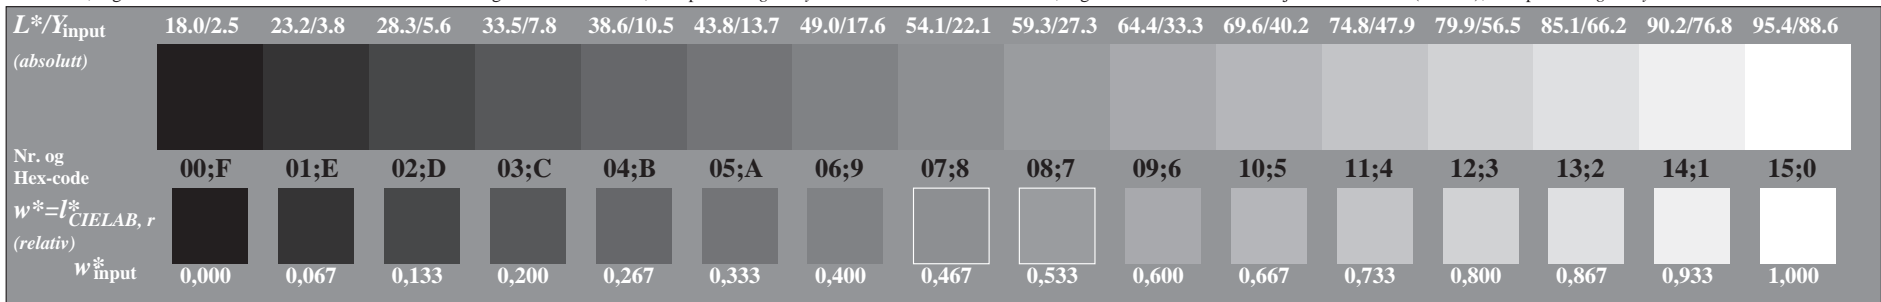


TN730-7, Figur C3Wd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: rgb/cmy0

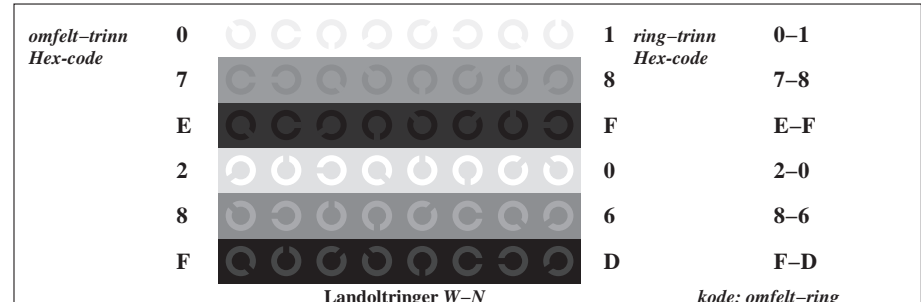

TN731-1, Figur C4Wd: Element D: Landoltringer W-N; PS operator: rgb/cmy0

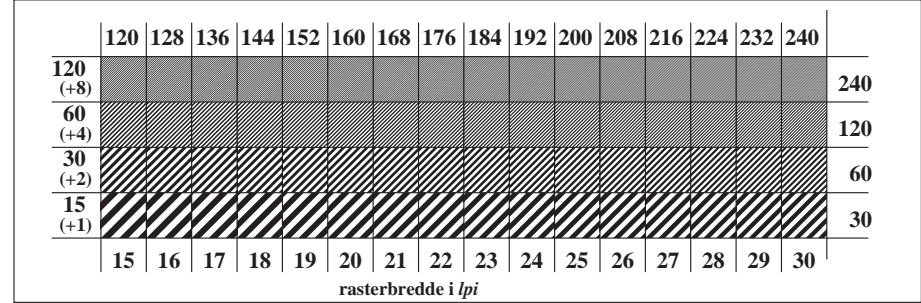

TN731-3, Figur C5Wd: Element E: Linjeraster med 45° (eller 135°); PS operator: rgb/cmy0

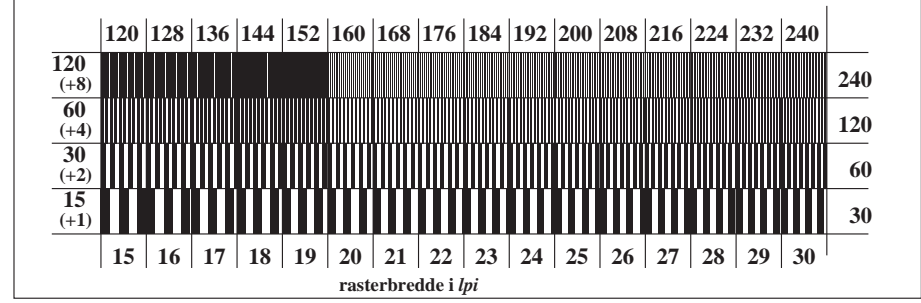

TN731-5, Figur C6Wd: Element F: Linjeraster med 90° (eller 0°); PS operator: rgb/cmy0

prøveplansje TN73; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: rgb/cmyk -> rgb<sub>d</sub>  
akromatisk prøveplansje N, 3D=0, de=0, cmyk output: overføring til cmyk<sub>d</sub>