

http://130.149.60.45/~farbmetrik/TN76/TN76L0NP.PDF /.PS; start output
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 1/2


se lignende filer: http://130.149.60.45/~farbmetrik/TN76/TN76.HTM
teknisk informasjon: http://www.ps.bam.de eller http://130.149.60.45/~farbmetrik

TUB registrering: 20150901-TN76/TN76L0NP.PDF /.PS
anvendelse for måling av offsettrykk output


TUB-material: code=rh4ta




radielt gitter (Siemens-stjerner) N-W

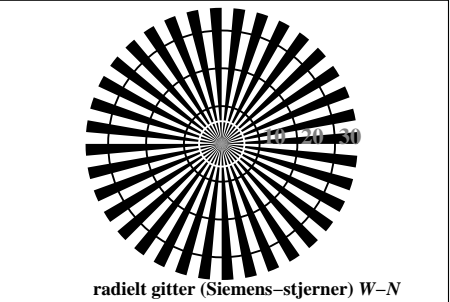

radielt gitter (Siemens-stjerner) W-N

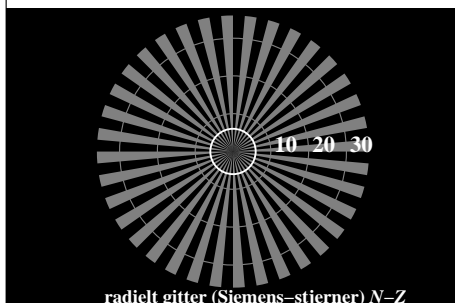

radielt gitter (Siemens-stjerner) N-Z

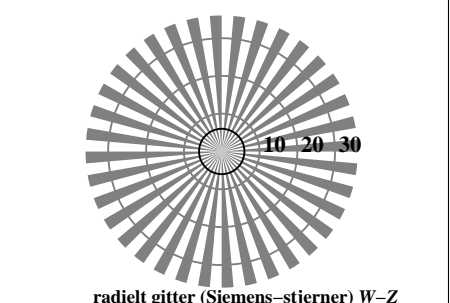

radielt gitter (Siemens-stjerner) W-Z

TN760-3, Figur C1W--: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: rgb/cmy0

L^*/Y_{input} (absolutt)	18.0/2.5	37.3/9.7	56.7/24.6	76.1/49.9	95.4/88.6	N_0 (min.)	W_1 (max.)
$w^* = L^*_{CIELAB, r}$ (relativ)							
w^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

TN760-5, Figur C2W--: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: rgb/cmy0

L^*/Y_{input} (absolutt)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.3	69.6/40.2	74.8/47.9	79.9/56.5	85.1/66.2	90.2/76.8	95.4/88.6
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = L^*_{CIELAB, r}$ (relativ)																
w^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

TN760-7, Figur C3W--: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: rgb/cmy0




prøveplansje TN76; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: rgb/cmyk -> rgb/cmyk
akromatisk prøveplansje N output: ingen endring




omfelt-trinn Hex-code	0	7	E	2	8	F
ring-trinn Hex-code	0-1	7-8	E-F	2-0	8-6	F-D

Landoltringer W-N kode: omfelt-ring

TN761-1, Figur C4W--: Element D: Landoltringer W-N; PS operator: rgb/cmy0

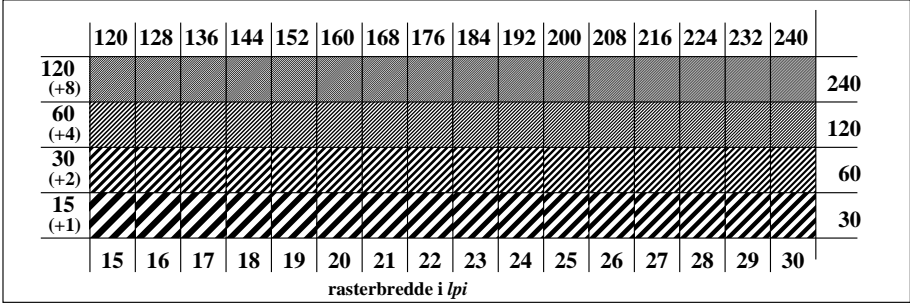

TN761-3, Figur C5W--: Element E: Linjeraster med 45° (eller 135°); PS operator: rgb/cmy0

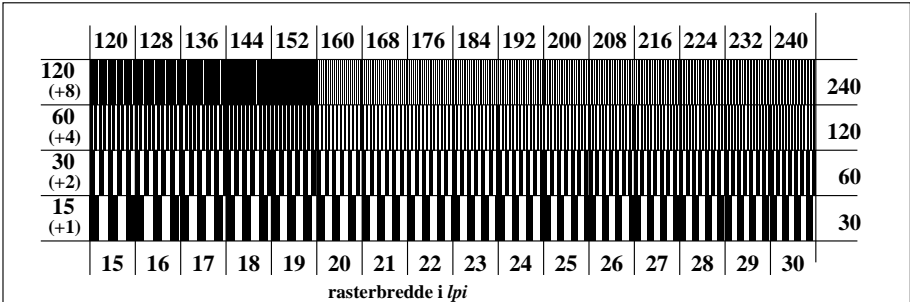

TN761-5, Figur C6W--: Element F: Linjeraster med 90° (eller 0°); PS operator: rgb/cmy0

