
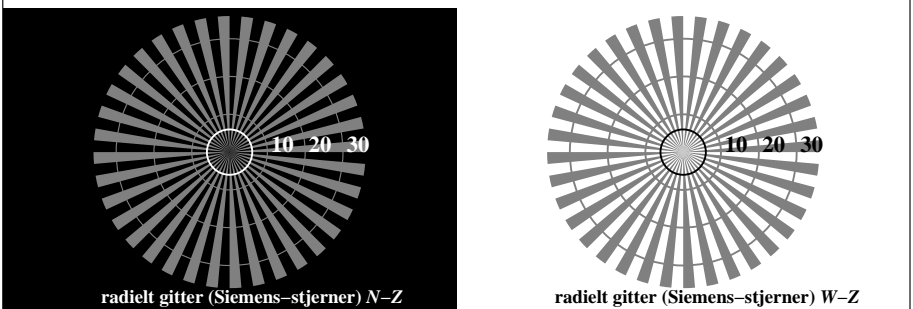


see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>

TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
application for measurement of laser printer output

TUB material: code=rh4ta

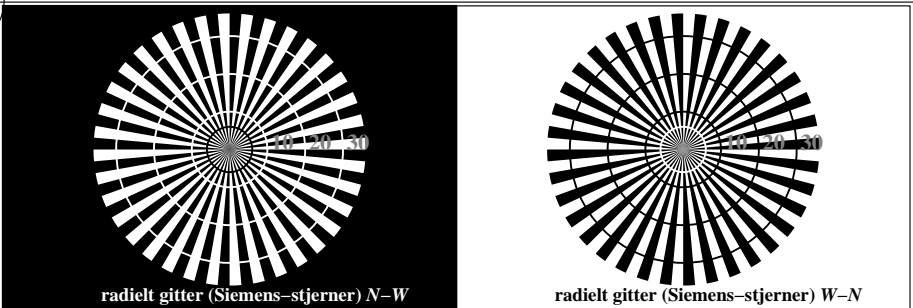

TN790-3, Figur C1W-: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: rgb/cmy0

$L^*/Y_{intendert}$	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	$N_0$ (min.)	$W_I$ (max.)
(absolutt)							
$w^* = l^*_{CIELAB, r}$							
(relativ)							
$w^*_{input}$	0,000	0,250	0,500	0,750	1,000	$N_0$ (min.)	$W_I$ (max.)
$w^*_{output}$							

TN790-5, Figur C2W-: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: rgb/cmy0

$L^*/Y_{intendert}$	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolutt)																
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$																
(relativ)																
$w^*_{input}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
$w^*_{output}$																

TN790-7, Figur C3W-: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: rgb/cmy0

test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775)	input: w/rgb/cmyk -> w/rgb/cmyk-
achromatic test chart N	output: no change compared

omfelt-trinn	0		1	ring-trinn	0-1
Hex-code	7		8	Hex-code	7-8
	E		F		E-F
	2		0		2-0
	8		6		8-6
	F		D		F-D

TN791-1, Figur C4W-: Element D: Landoltringer W-N; PS operator: rgb/cmy0

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	





TN791-3, Figur C5W-: Element E: Linjeraster med 45° (eller 135°); PS operator: rgb/cmy0

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

TN791-5, Figur C6W-: Element F: Linjeraster med 90° (eller 0°); PS operator: rgb/cmy0

see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>

TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
application for measurement of laser printer output, separation cmyk\* (CMYK)  
TUB material: code=rh4ta

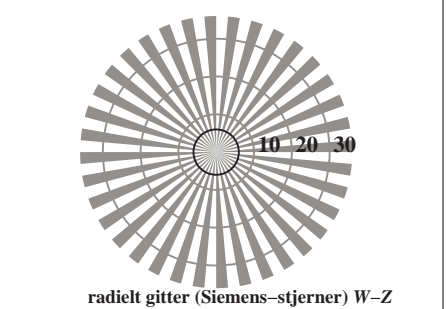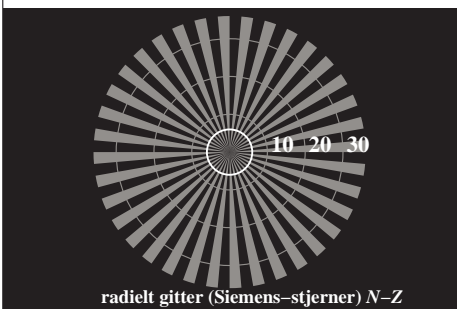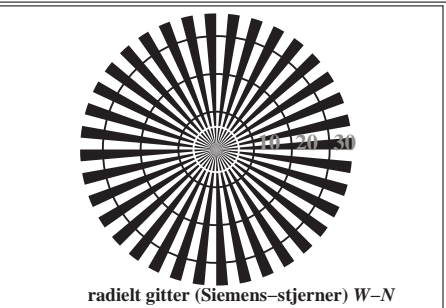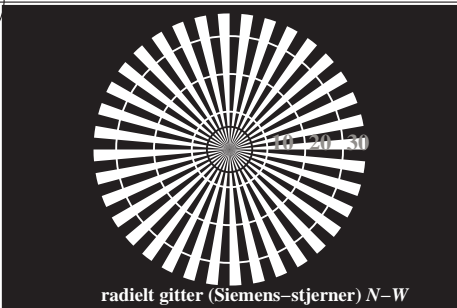

TN790-3, Figur C1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: rgb/cmy0

$L^*/Y_{intendert}$	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	$N_0$ (min.)	$W_I$ (max.)
(absolutt)							
$w^* = I^*_{CIELAB, r}$							
(relativ)							
$w^*_{input}$	0,000	0,250	0,500	0,750	1,000	$N_0$ (min.)	$W_I$ (max.)
$w^*_{output}$							

TN790-5, Figur C2Wdd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: rgb/cmy0

$L^*/Y_{intendert}$	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolutt)																
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = I^*_{CIELAB, r}$																
(relativ)																
$w^*_{input}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
$w^*_{output}$																

TN790-7, Figur C3Wdd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: rgb/cmy0

test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: w/rgb/cmyk -> rgb<sub>dd</sub>  
 achromatic test chart N, 3D=1, de=0, cmyk\* output: 3D-linearization to cmyk\*<sub>dd</sub>

<i>omfelt-trinn</i>	0		1	<i>ring-trinn</i>	0-1
<i>Hex-code</i>	7		8	<i>Hex-code</i>	7-8
	E		F		E-F
	2		0		2-0
	8		6		8-6
	F		D		F-D

Landoltringer W-N kode: omfelt-ring

TN791-1, Figur C4Wdd: Element D: Landoltringer W-N; PS operator: rgb/cmy0

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

rasterbredde i lpi

TN791-3, Figur C5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: rgb/cmy0

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


rasterbredde i lpi

TN791-5, Figur C6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: rgb/cmy0




see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
 technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>


TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
 application for measurement of laser printer output, separation cmyk\* (CMYK)  
 TUB material: code=rh4ta

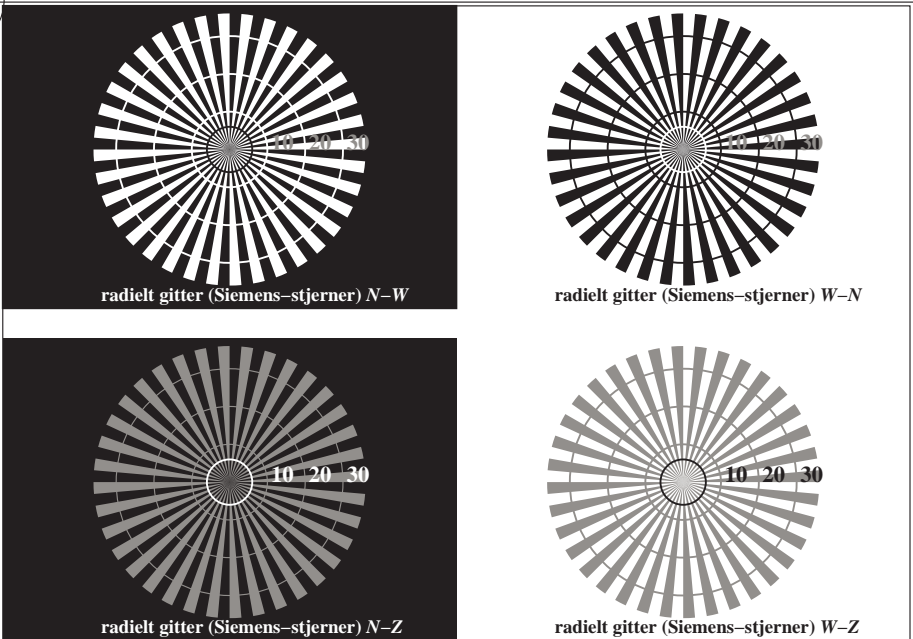


TN790-3, Figur C1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

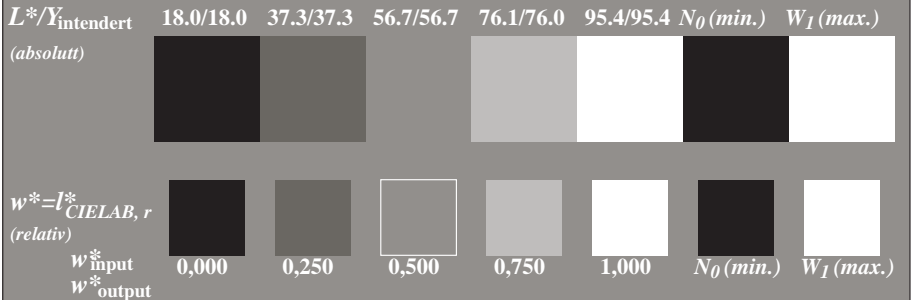


TN790-5, Figur C2Wdd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

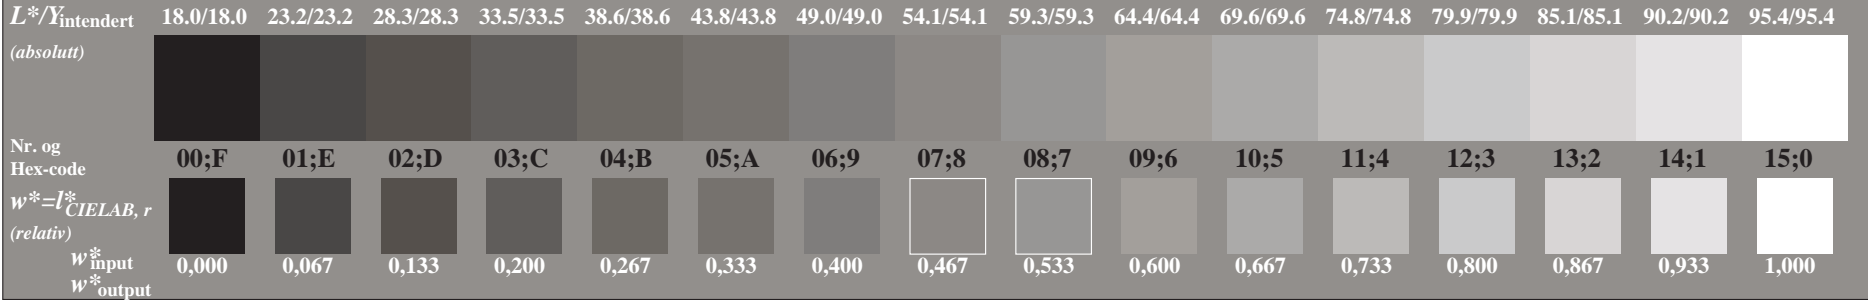


TN790-7, Figur C3Wdd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

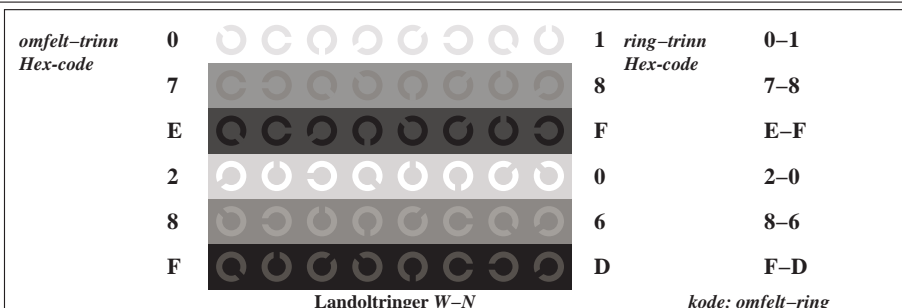

TN791-1, Figur C4Wdd: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

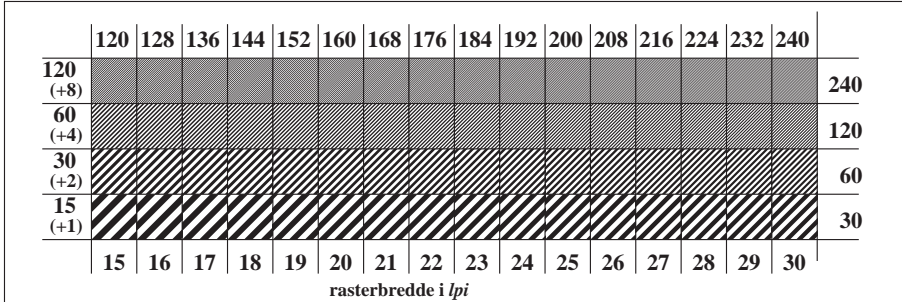


TN791-3, Figur C5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

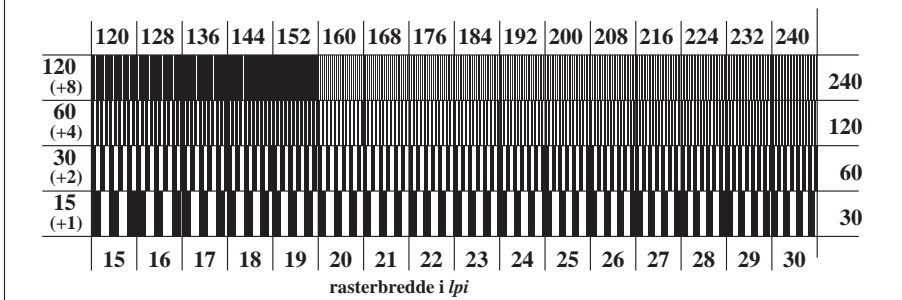


TN791-5, Figur C6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*




test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775) achromatic test chart N, 3D=1, de=0, *cmyk^\**




radielt gitter (Siemens-stjerner) N-W



radielt gitter (Siemens-stjerner) W-N



radielt gitter (Siemens-stjerner) N-Z



radielt gitter (Siemens-stjerner) W-Z

TN790-3, Figur C1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

$L^*/Y_{intendert}$	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	$N_0$ (min.)	$W_I$ (max.)
(absolutt)							
$w^* = l^*_{CIE LAB, r}$							
(relativ)							
$w^*_{input}$	0,000	0,250	0,500	0,750	1,000	$N_0$ (min.)	$W_I$ (max.)
$w^*_{output}$							

TN790-5, Figur C2Wdd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

$L^*/Y_{intendert}$	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolutt)																
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE LAB, r}$																
(relativ)																
$w^*_{input}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
$w^*_{output}$																

TN790-7, Figur C3Wdd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

	test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775)	input: <i>w/rgb/cmyk</i> -> <i>rgb<sub>dd</sub></i>	
	achromatic test chart N, 3D=1, de=0, <i>cmyk*</i>	output: 3D-linearization to <i>cmyk*<sub>dd</sub></i>	

<i>omfelt-trinn</i>	0		<i>ring-trinn</i>	1	
<i>Hex-code</i>	7		<i>Hex-code</i>	8	
	E			F	
	2			0	
	8			6	
	F			D	

**Landoltringer W-N** *kode: omfelt-ring*

TN791-1, Figur C4Wdd: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

**rasterbredde i lpi**

TN791-3, Figur C5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	





**rasterbredde i lpi**

TN791-5, Figur C6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*

see similar files: http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF /.PS; 3D-linearization  
 technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik

TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS application for measurement of laser printer output, separation *cmyk\** (CMYK) TUB material: code=rh4ta





TN790-3, Figur C1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

$L^*/Y_{intendert}$	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	$N_0$ (min.)	$W_I$ (max.)
(absolutt)							
$w^* = l^*_{CIE_{LAB}, r}$							
(relativ)							
$w^*_{input}$	0,000	0,250	0,500	0,750	1,000	$N_0$ (min.)	$W_I$ (max.)
$w^*_{output}$							

TN790-5, Figur C2Wdd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

$L^*/Y_{intendert}$	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolutt)																
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE_{LAB}, r}$																
(relativ)																
$w^*_{input}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
$w^*_{output}$																

TN790-7, Figur C3Wdd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: *w/rgb/cmyk* -> *rgb<sub>dd</sub>*  
 achromatic test chart N, 3D=1, de=0, *cmyk\** output: 3D-linearization to *cmyk\*<sub>dd</sub>*

Landoltringer W-N

omfelt-trinn	0	1	ring-trinn	0-1
Hex-code	7	8	Hex-code	7-8
	E	F		E-F
	2	0		2-0
	8	6		8-6
	F	D		F-D

kode: omfelt-ring

TN791-1, Figur C4Wdd: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

rasterbredde i lpi

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

TN791-3, Figur C5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

rasterbredde i lpi

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	



TN791-5, Figur C6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*

see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
 technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>


TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
 application for measurement of laser printer output, separation *cmyk\** (CMYK)  
 TUB material: code=rh4ta

see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
 technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>


TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
 application for measurement of laser printer output, separation cmyk\* (CMYK)  
 TUB material: code=rh4ta

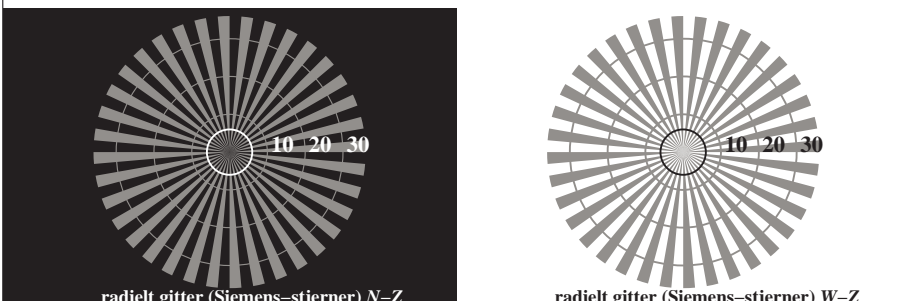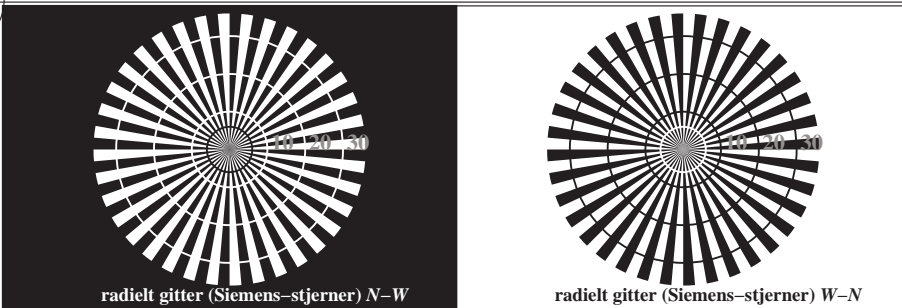


TN790-3, Figur C1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

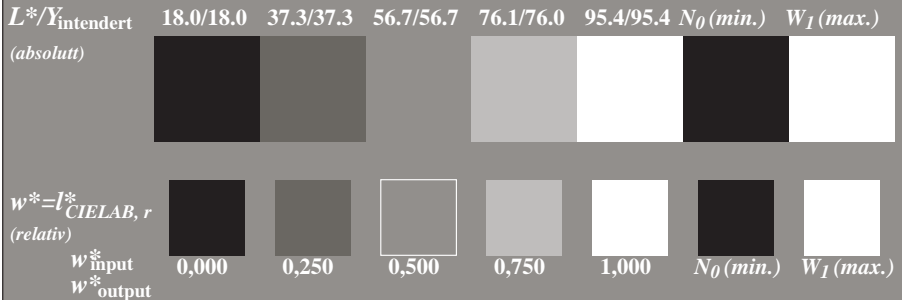


TN790-5, Figur C2Wdd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

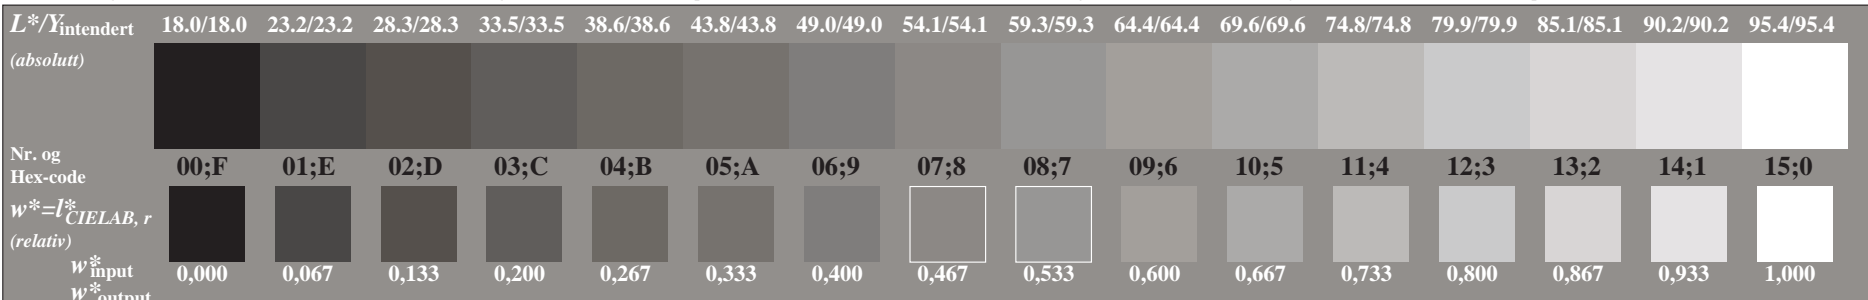


TN790-7, Figur C3Wdd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

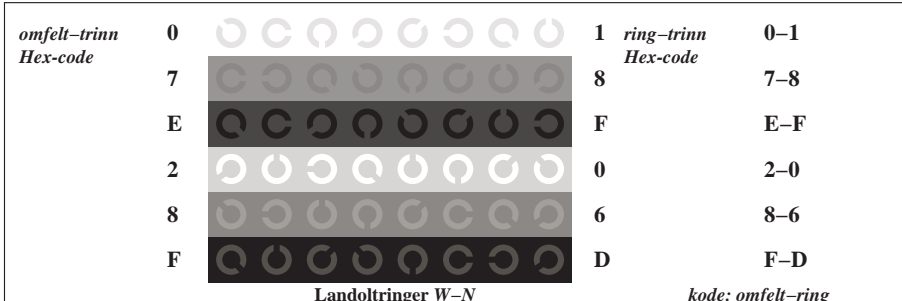

TN791-1, Figur C4Wdd: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

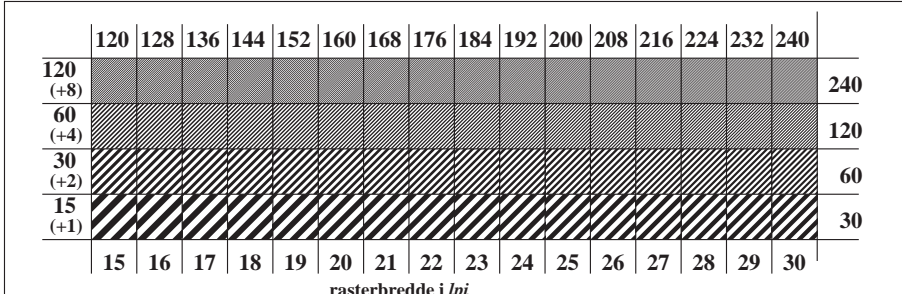

TN791-3, Figur C5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

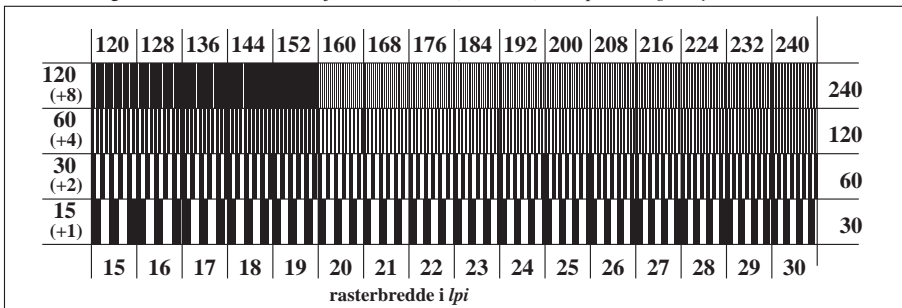

TN791-5, Figur C6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*



input: *w/rgb/cmyk* -> *rgb*<sub>dd</sub>  
 output: 3D-linearization to *cmyk*<sub>dd</sub>\*



TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
 application for measurement of laser printer output, separation cmyk\* (CMYK)  
 TUB material: code=rh4t4

n/j	HIC*Fdd	rgb_Fdd	icf_Fdd	hsi_Fdd	rgb*Fdd	LabCh*Fdd	cmyk*sep,Fdd	hsiMdd	rgb*Mdd	LabCh*Mdd
0/648	R00Y_100_100ad	1.0 0.0 0.0	1.0 1.0 0.5	390	1.0 0.0 0.0	47.5 57.2 37.8	68.6 33.4	0.0 1.0 1.0	0.0 0.0 0.0	47.5 57.2 37.8
1/666	R25Y_100_100ad	1.0 0.25 0.0	1.0 1.0 0.5	44	1.0 0.233 0.0	57.4 43.5 54.5	69.7 51.4	0.0 0.767 1.0	1.0 0.0 0.0	57.4 43.5 54.5
2/684	R50Y_100_100ad	1.0 0.5 0.0	1.0 1.0 0.5	60	1.0 0.5 0.0	70.5 19.2 66.2	69.0 73.8	0.0 0.5 1.0	0.0 0.0 0.0	70.5 19.2 66.2
3/702	R75Y_100_100ad	1.0 0.75 0.0	1.0 1.0 0.5	76	1.0 0.766 0.0	83.5 -2.9 76.8	76.9 92.2	0.0 0.233 0.999	0.001 0.0 0.0	83.5 -2.9 76.8
4/720	Y00G_100_100ad	1.0 1.0 0.0	1.0 1.0 0.5	90	1.0 1.0 0.0	91.5 -15.8 84.6	86.1 100.5	0.0 0.0 1.0	0.0 0.0 0.0	91.5 -15.8 84.6
5/558	Y25G_100_100ad	0.75 1.0 0.0	1.0 1.0 0.5	104	0.766 1.0 0.0	90.4 -20.9 86.5	89.0 103.6	0.234 0.0 1.0	0.0 1.0 0.0	90.4 -20.9 86.5
6/396	Y50G_100_100ad	0.5 1.0 0.0	1.0 1.0 0.5	120	0.5 1.0 0.0	70.9 -41.7 54.8	68.9 127.3	0.5 0.0 1.0	0.0 0.0 0.0	70.9 -41.7 54.8
7/234	Y75G_100_100ad	0.25 1.0 0.0	1.0 1.0 0.5	136	0.233 1.0 0.0	60.1 -57.9 39.6	70.2 145.5	0.763 0.0 1.0	0.0 0.0 0.0	60.1 -57.9 39.6
8/72	G00B_100_100ad	0.0 1.0 0.0	1.0 1.0 0.5	150	0.0 1.0 0.0	54.3 -67.6 30.8	74.3 155.5	1.0 0.0 1.0	0.0 0.0 0.0	54.3 -67.6 30.8
9/72	G00B_100_100ad	0.0 1.0 0.0	1.0 1.0 0.5	150	0.0 1.0 0.0	54.3 -67.6 30.8	74.3 155.5	1.0 0.0 1.0	0.0 0.0 0.0	54.3 -67.6 30.8
10/76	G25B_100_100ad	0.0 1.0 0.5	1.0 1.0 0.5	180	0.0 1.0 0.5	55.0 -51.4 -8.9	52.2 189.8	1.0 0.0 0.5	1.0 0.0 0.0	55.0 -51.4 -8.9
11/80	G50B_100_100ad	0.0 1.0 1.0	1.0 1.0 0.5	210	0.0 1.0 1.0	53.1 -30.0 -43.1	52.5 235.1	0.999 0.0 0.0	0.0 0.0 0.0	53.1 -30.0 -43.1
12/44	G75B_100_100ad	0.0 0.5 1.0	1.0 1.0 0.5	240	0.0 0.5 1.0	46.1 -13.3 -49.4	51.1 254.9	1.0 0.5 0.0	0.0 0.0 0.0	46.1 -13.3 -49.4
13/8	B00M_100_100ad	0.0 0.0 1.0	1.0 1.0 0.5	270	0.0 0.0 1.0	32.5 16.9 -44.6	47.7 290.8	1.0 1.0 0.0	0.0 0.0 0.0	32.5 16.9 -44.6
14/332	B25R_100_100ad	0.5 0.0 1.0	1.0 1.0 0.5	300	0.5 0.0 1.0	37.2 43.1 -30.8	53.0 324.4	0.498 0.999 0.0	0.0 0.0 0.0	37.2 43.1 -30.8
15/656	B50R_100_100ad	1.0 0.0 1.0	1.0 1.0 0.5	330	1.0 0.0 1.0	48.1 65.4 -12.7	66.6 348.9	0.0 1.0 0.0	0.0 0.0 0.0	48.1 65.4 -12.7
16/652	B75R_100_100ad	1.0 0.0 0.5	1.0 1.0 0.5	360	1.0 0.0 0.5	47.8 58.9 10.4	59.9 30.0	0.0 1.0 0.5	1.0 0.0 0.0	47.8 58.9 10.4
17/648	R00Y_100_100ad	1.0 0.0 0.0	1.0 1.0 0.5	390	1.0 0.0 0.0	47.5 57.2 37.8	68.6 33.4	0.0 1.0 1.0	0.0 0.0 0.0	47.5 57.2 37.8
18/688	R00Y_100_050ad	1.0 0.5 0.5	1.0 0.5 0.75	390	1.0 0.5 0.5	71.7 28.6 18.9	34.3 33.4	0.0 0.504 0.398	0.0 0.0 0.0	47.5 57.2 37.8
19/706	R50Y_100_050ad	1.0 0.75 0.5	1.0 0.5 0.75	60	1.0 0.75 0.5	83.1 9.6 33.1	34.5 73.8	0.0 0.283 0.426	0.0 0.0 0.0	70.5 19.2 66.2
20/724	Y00G_100_050ad	1.0 1.0 0.5	1.0 0.5 0.75	90	1.0 1.0 0.5	93.7 -7.9 42.3	43.0 100.5	0.0 0.012 0.457	0.0 0.0 0.0	91.5 -15.8 84.6
21/562	Y50G_100_050ad	0.75 1.0 0.5	1.0 0.5 0.75	120	0.75 1.0 0.5	83.4 -20.8 27.4	34.4 127.3	0.269 0.0 0.458	0.046 0.0 0.0	70.9 -41.7 54.8
22/400	G00B_100_050ad	0.5 1.0 0.5	1.0 0.5 0.75	150	0.5 1.0 0.5	75.0 -33.8 15.4	37.1 155.5	0.498 0.0 0.623	0.0 0.0 0.0	54.3 -67.6 30.8
23/404	G50B_100_050ad	0.5 1.0 1.0	1.0 0.5 0.75	210	0.5 1.0 1.0	74.4 -15.0 -21.5	26.2 235.1	0.374 0.013 0.0	0.158 0.0 0.0	53.1 -30.0 -43.1
24/368	B00R_100_050ad	0.5 0.5 1.0	1.0 0.5 0.75	270	0.5 0.5 1.0	64.2 8.4 -22.3	23.8 290.8	0.316 0.347 0.0	0.157 0.0 0.0	32.5 16.9 -44.6
25/692	B50R_100_050ad	1.0 0.5 1.0	1.0 0.5 0.75	330	1.0 0.5 1.0	72.0 32.7 -6.3	33.3 348.9	0.0 0.478 0.108	0.022 0.0 0.0	48.1 65.4 -12.7
26/688	R00Y_100_050ad	1.0 0.5 0.5	1.0 0.5 0.75	390	1.0 0.5 0.5	71.7 28.6 18.9	34.3 33.4	0.0 0.504 0.398	0.0 0.0 0.0	47.5 57.2 37.8
27/506	R00Y_075_050ad	0.75 0.25 0.25	0.75 0.5 0.5	390	0.75 0.25 0.25	53.7 28.6 18.9	34.3 33.4	0.0 0.632 0.514	0.234 0.0 0.0	47.5 57.2 37.8
28/524	R50Y_075_050ad	0.75 0.5 0.25	0.75 0.5 0.5	60	0.75 0.5 0.25	65.1 9.6 33.1	34.5 73.8	0.0 0.359 0.616	0.236 0.0 0.0	70.5 19.2 66.2
29/542	Y00G_075_050ad	0.75 0.75 0.25	0.75 0.5 0.5	90	0.75 0.75 0.25	75.7 -7.9 42.3	43.0 100.5	0.0 0.062 0.597	0.302 0.0 0.0	91.5 -15.8 84.6
30/380	Y50G_075_050ad	0.5 0.75 0.25	0.75 0.5 0.5	120	0.5 0.75 0.25	65.4 -20.8 27.4	34.4 127.3	0.301 0.0 0.609	0.334 0.0 0.0	70.9 -41.7 54.8
31/218	G00B_075_050ad	0.25 0.75 0.25	0.75 0.5 0.5	150	0.25 0.75 0.25	57.0 -33.8 15.4	37.1 155.5	0.586 0.0 0.642	0.285 0.0 0.0	54.3 -67.6 30.8
32/222	G50B_075_050ad	0.25 0.75 0.75	0.75 0.5 0.5	210	0.25 0.75 0.75	56.4 -15.0 -21.5	26.2 235.1	0.477 0.0 0.015	0.398 0.0 0.0	53.1 -30.0 -43.1
33/186	B00R_075_050ad	0.25 0.25 0.75	0.75 0.5 0.5	270	0.25 0.25 0.75	46.2 8.4 -22.3	23.8 290.8	0.364 0.428 0.0	0.425 0.0 0.0	32.5 16.9 -44.6
34/510	B50R_075_050ad	0.75 0.25 0.75	0.75 0.5 0.5	330	0.75 0.25 0.75	54.0 32.7 -6.3	33.3 348.9	0.0 0.609 0.12	0.286 0.0 0.0	48.1 65.4 -12.7
35/506	R00Y_075_050ad	0.75 0.25 0.25	0.75 0.5 0.5	390	0.75 0.25 0.25	53.7 28.6 18.9	34.3 33.4	0.0 0.632 0.514	0.234 0.0 0.0	47.5 57.2 37.8
36/324	R00Y_050_050ad	0.5 0.0 0.0	0.5 0.5 0.25	390	0.5 0.0 0.0	35.7 28.6 18.9	34.3 33.4	0.0 0.803 0.705	0.52 0.0 0.0	47.5 57.2 37.8
37/342	R50Y_050_050ad	0.5 0.25 0.0	0.5 0.5 0.25	60	0.5 0.25 0.0	47.1 9.6 33.1	34.5 73.8	0.0 0.442 0.766	0.476 0.0 0.0	70.5 19.2 66.2
38/360	Y00G_050_050ad	0.5 0.5 0.0	0.5 0.5 0.25	90	0.5 0.5 0.0	57.7 -7.9 42.3	43.0 100.5	0.0 0.051 0.73	0.52 0.0 0.0	91.5 -15.8 84.6
39/198	Y50G_050_050ad	0.25 0.5 0.0	0.5 0.5 0.25	120	0.25 0.5 0.0	47.4 -20.8 27.4	34.4 127.3	0.349 0.0 0.775	0.532 0.0 0.0	70.9 -41.7 54.8
40/36	G00B_050_050ad	0.0 0.5 0.0	0.5 0.5 0.25	150	0.0 0.5 0.0	39.0 -33.8 15.4	37.1 155.5	0.655 0.0 0.778	0.617 0.0 0.0	54.3 -67.6 30.8
41/40	G50B_050_050ad	0.0 0.5 0.5	0.5 0.5 0.25	210	0.0 0.5 0.5	38.4 -15.0 -21.5	26.2 235.1	0.614 0.003 0.0	0.662 0.0 0.0	53.1 -30.0 -43.1
42/4	B00R_050_050ad	0.0 0.0 0.5	0.5 0.5 0.25	270	0.0 0.0 0.5	28.2 8.4 -22.3	23.8 290.8	0.501 0.649 0.0	0.669 0.0 0.0	32.5 16.9 -44.6
43/328	B50R_050_050ad	0.5 0.0 0.5	0.5 0.5 0.25	330	0.5 0.0 0.5	36.0 32.7 -6.3	33.3 348.9	0.0 0.757 0.143	0.571 0.0 0.0	48.1 65.4 -12.7
44/324	R00Y_050_050ad	0.5 0.0 0.0	0.5 0.5 0.25	390	0.5 0.0 0.0	35.7 28.6 18.9	34.3 33.4	0.0 0.803 0.705	0.52 0.0 0.0	47.5 57.2 37.8
45/0	NW_000ad	0.0 0.0 0.0	0.0 0.0 0.0	360	0.0 0.0 0.0	23.8 0.0 0.0	0.0 0.0 0.0	0.0 0.0 1.0	0.0 0.0 0.0	95.8 0.0 0.0
46/91	NW_013ad	0.125 0.125 0.125	0.125 0.0 0.125	360	0.125 0.125 0.125	32.8 0.0 0.0	0.0 0.0 0.0	0.0 0.054 0.11	0.815 0.0 0.0	95.8 0.0 0.0
47/182	NW_025ad	0.25 0.25 0.25	0.25 0.0 0.25	360	0.25 0.25 0.25	41.8 0.0 0.0	0.0 0.0 0.0	0.0 0.032 0.082	0.716 0.0 0.0	95.8 0.0 0.0
48/273	NW_038ad	0.375 0.375 0.375	0.375 0.0 0.375	360	0.375 0.375 0.375	50.8 0.0 0.0	0.0 0.0 0.0	0.0 0.026 0.052	0.629 0.0 0.0	95.8 0.0 0.0
49/364	NW_050ad	0.5 0.5 0.5	0.5 0.0 0.5	360	0.5 0.5 0.5	59.8 0.0 0.0	0.0 0.0 0.0	0.0 0.029 0.059	0.51 0.0 0.0	95.8 0.0 0.0
50/455	NW_063ad	0.625 0.625 0.625	0.625 0.0 0.625	360	0.625 0.625 0.625	68.8 0.0 0.0	0.0 0.0 0.0	0.0 0.028 0.063	0.409 0.0 0.0	95.8 0.0 0.0
51/546	NW_075ad	0.75 0.75 0.75	0.75 0.0 0.75	360	0.75 0.75 0.75	77.8 0.0 0.0	0.0 0.0 0.0	0.0 0.015 0.029	0.286 0.0 0.0	95.8 0.0 0.0
52/637	NW_088ad	0.875 0.875 0.875	0.875 0.0 0.875	360	0.875 0.875 0.875	86.8 0.0 0.0	0.0 0.0 0.0	0.0 0.017 0.018	0.158 0.0 0.0	95.8 0.0 0.0
53/728	NW_100ad	1.0 1.0 1.0	1.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0	95.8 0.0 0.0

delta

see similar files: http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF /.PS  
 technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik

















Table with columns: n, HIC\*Fdd, rgb\_Fdd, icf\_Fdd, hsi\_Fdd, rgb\*Fdd, LabCh\*Fdd, cmyn\*sep.Fdd, hsi\_Mdd, rgb\*Mdd, LabCh\*Mdd. Rows 486-566. Includes a 'delta' column at the bottom of the data rows.

test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775)  
colors and differences,  $\Delta E^*$ , 3D=1, de=0, *cmYk*\*

input: *w/rgb/cmyk* -> *rgbdd*  
output: 3D-linearization to *cmYk*\*<sub>dd</sub>

TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
application for measurement of laser printer output, separation *cmYk*\* (CMYK)  
TUB material: code=rha4ta

see similar files: http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF /.PS  
technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik















see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79.HTM>  
 technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>

TUB registration: 20130201 -TN79/TN79L0FP.PDF /.PS TUB material: code=rh4ta  
 application for measurement of laser printer output, separation cmyk\* (CMYK)

n	HIC*Fdd	rgb_Fdd	icf_Fdd	hsi_Fdd	rgb*Fdd	LabCh*Fdd					cmy*sep.Fdd	hsiMdd	rgb*Mdd	LabCh*Mdd				
1053	NW_086da	0.866 0.866 0.866	0.866 0.0 0.866	360	0.866 0.866 0.866	86.1 0.0 0.0	0.0	0.0	0.0	0.0	0.019	0.02	0.164	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1054	NW_093da	0.933 0.933 0.933	0.933 0.0 0.933	360	0.933 0.933 0.933	91.0 0.0 0.0	0.0	0.0	0.0	0.0	0.016	0.005	0.103	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1055	NW_100da	1.0 1.0 1.0	1.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1056	NW_000da	0.0 0.0 0.0	0.0 0.0 0.0	360	0.0 0.0 0.0	23.8 0.0 0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1057	NW_006da	0.066 0.066 0.066	0.066 0.0 0.066	360	0.066 0.066 0.066	28.6 0.0 0.0	0.0	0.0	0.0	0.0	0.016	0.054	0.865	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1058	NW_013da	0.133 0.133 0.133	0.133 0.0 0.133	360	0.133 0.133 0.133	33.4 0.0 0.0	0.0	0.0	0.0	0.0	0.053	0.109	0.809	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1059	NW_020da	0.2 0.2 0.2	0.2 0.0 0.2	360	0.2 0.2 0.2	38.2 0.0 0.0	0.0	0.0	0.0	0.0	0.034	0.068	0.76	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1060	NW_026da	0.266 0.266 0.266	0.266 0.0 0.266	360	0.266 0.266 0.266	42.9 0.0 0.0	0.0	0.0	0.0	0.0	0.039	0.092	0.701	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1061	NW_033da	0.333 0.333 0.333	0.333 0.0 0.333	360	0.333 0.333 0.333	47.8 0.0 0.0	0.0	0.0	0.0	0.0	0.044	0.085	0.652	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1062	NW_040da	0.4 0.4 0.4	0.4 0.0 0.4	360	0.4 0.4 0.4	52.6 0.0 0.0	0.0	0.0	0.0	0.0	0.023	0.048	0.608	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1063	NW_046da	0.466 0.466 0.466	0.466 0.0 0.466	360	0.466 0.466 0.466	57.3 0.0 0.0	0.0	0.0	0.0	0.0	0.038	0.078	0.539	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1064	NW_053da	0.533 0.533 0.533	0.533 0.0 0.533	360	0.533 0.533 0.533	62.2 0.0 0.0	0.0	0.0	0.0	0.0	0.017	0.04	0.482	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1065	NW_060da	0.6 0.6 0.6	0.6 0.0 0.6	360	0.6 0.6 0.6	67.0 0.0 0.0	0.0	0.0	0.0	0.0	0.028	0.064	0.427	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1066	NW_066da	0.666 0.666 0.666	0.666 0.0 0.666	360	0.666 0.666 0.666	71.7 0.0 0.0	0.0	0.0	0.0	0.0	0.015	0.038	0.381	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1067	NW_073da	0.734 0.734 0.734	0.734 0.0 0.734	360	0.734 0.734 0.734	76.6 0.0 0.0	0.0	0.0	0.0	0.0	0.017	0.033	0.301	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1068	NW_080da	0.8 0.8 0.8	0.8 0.0 0.8	360	0.8 0.8 0.8	81.4 0.0 0.0	0.0	0.0	0.0	0.0	0.01	0.011	0.23	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1069	NW_086da	0.866 0.866 0.866	0.866 0.0 0.866	360	0.866 0.866 0.866	86.1 0.0 0.0	0.0	0.0	0.0	0.0	0.019	0.02	0.164	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1070	NW_093da	0.933 0.933 0.933	0.933 0.0 0.933	360	0.933 0.933 0.933	91.0 0.0 0.0	0.0	0.0	0.0	0.0	0.016	0.005	0.103	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1071	NW_100da	1.0 1.0 1.0	1.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1072	NW_000da	0.0 0.0 0.0	0.0 0.0 0.0	360	0.0 0.0 0.0	23.8 0.0 0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1073	NW_100da	1.0 1.0 1.0	1.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0
1074	R00Y_100_100da	1.0 0.0 0.0	1.0 1.0 0.5	390	1.0 0.0 0.0	47.5 57.2 37.8	68.6 33.4	0.0	1.0	1.0	0.0	0.0	0.0	389	1.0 0.0 0.0	47.5 57.2 37.8	68.6 33.4	0.0
1075	G50B_100_100da	0.0 1.0 1.0	1.0 1.0 0.5	210	0.0 1.0 1.0	53.1 -30.0 -43.1	52.5 235.1	0.999	0.0	0.0	0.0	0.0	0.0	210	0.0 1.0 1.0	53.1 -30.0 -43.1	52.5 235.1	0.0
1076	Y00G_100_100da	1.0 1.0 0.0	1.0 1.0 0.5	90	1.0 1.0 0.0	91.5 -15.8 84.6	86.1 100.5	0.0	0.0	1.0	0.0	0.0	0.0	89	1.0 1.0 0.0	91.5 -15.8 84.6	86.1 100.5	0.0
1077	B00R_100_100da	0.0 0.0 1.0	1.0 1.0 0.5	270	0.0 0.0 1.0	32.5 16.9 -44.6	47.7 290.8	1.0	1.0	0.0	0.0	0.0	0.0	270	0.0 0.0 1.0	32.5 16.9 -44.6	47.7 290.8	0.0
1078	G00B_100_100da	0.0 1.0 0.0	1.0 1.0 0.5	150	0.0 1.0 0.0	54.3 -67.6 30.8	74.3 155.5	1.0	0.0	1.0	0.0	0.0	0.0	149	0.0 1.0 0.0	54.3 -67.6 30.8	74.3 155.5	0.0
1079	B50R_100_100da	1.0 0.0 1.0	1.0 1.0 0.5	330	1.0 0.0 1.0	48.1 65.4 -12.7	66.6 348.9	0.0	1.0	0.0	0.0	0.0	0.0	330	1.0 0.0 1.0	48.1 65.4 -12.7	66.6 348.9	0.0

delta

5-1032130-F0



TN790-7N, 22/22-F

5-1032130-F0

see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>

TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
application for measurement of laser printer output

TUB material: code=rh4ta

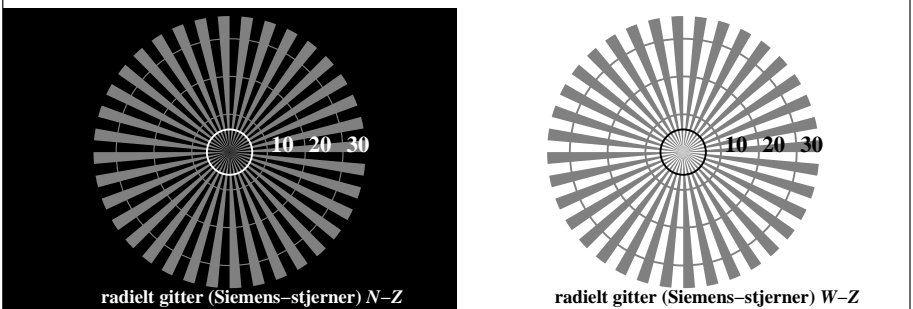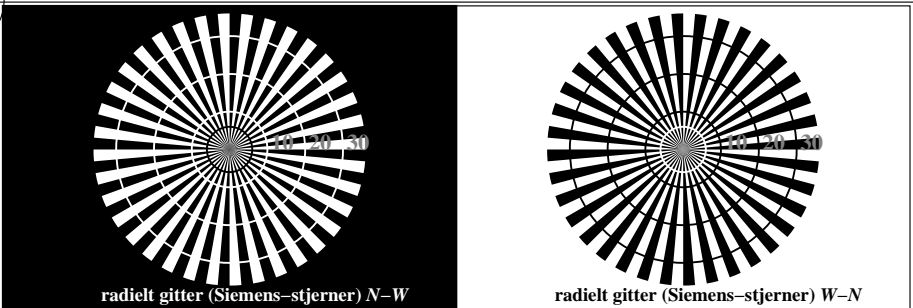

TN790-3, Figur C1W-: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: rgb/cmy0

$L^*/Y_{intendert}$	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	$N_0$ (min.)	$W_I$ (max.)
(absolutt)							
$w^* = l^*_{CIE\text{LAB}, r}$							
(relativ)							
$w^*_{input}$	0,000	0,250	0,500	0,750	1,000	$N_0$ (min.)	$W_I$ (max.)
$w^*_{output}$							

TN790-5, Figur C2W-: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: rgb/cmy0

$L^*/Y_{intendert}$	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolutt)																
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE\text{LAB}, r}$																
(relativ)																
$w^*_{input}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
$w^*_{output}$																

TN790-7, Figur C3W-: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: rgb/cmy0

test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775)	input: w/rgb/cmyk -> w/rgb/cmyk-
achromatic test chart N	output: no change compared

omfelt-trinn	0		1	ring-trinn	0-1
Hex-code	7		8	Hex-code	7-8
	E		F		E-F
	2		0		2-0
	8		6		8-6
	F		D		F-D

TN791-1, Figur C4W-: Element D: Landoltringer W-N; PS operator: rgb/cmy0

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	



TN791-3, Figur C5W-: Element E: Linjeraster med 45° (eller 135°); PS operator: rgb/cmy0

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


TN791-5, Figur C6W-: Element F: Linjeraster med 90° (eller 0°); PS operator: rgb/cmy0

see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>


TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
application for measurement of laser printer output, separation cmyk\* (CMYK)  
TUB material: code=rh4ta

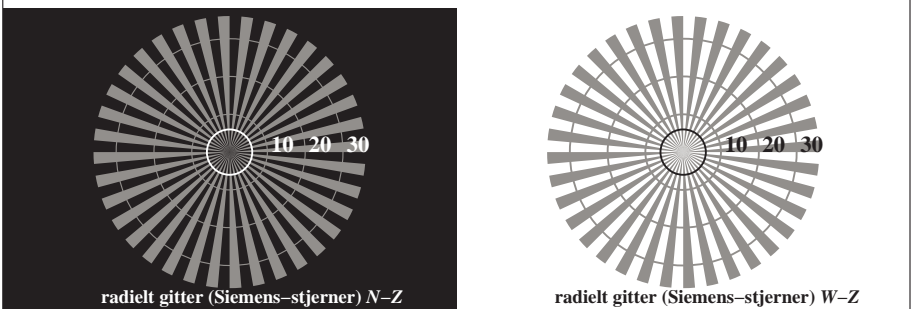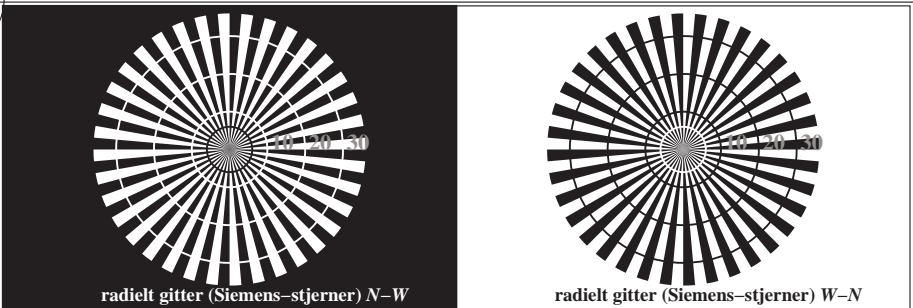


TN790-3, Figur C1Wde: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

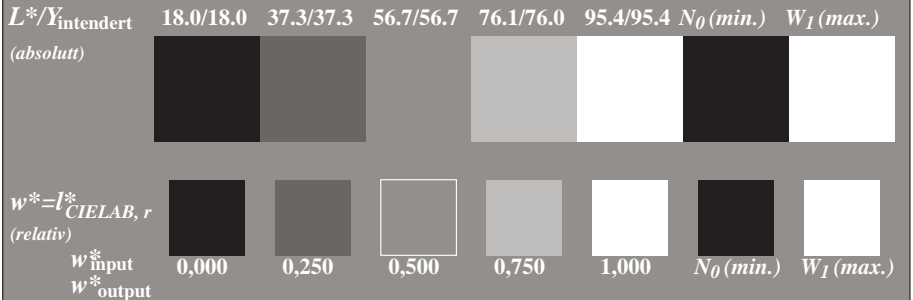


TN790-5, Figur C2Wde: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

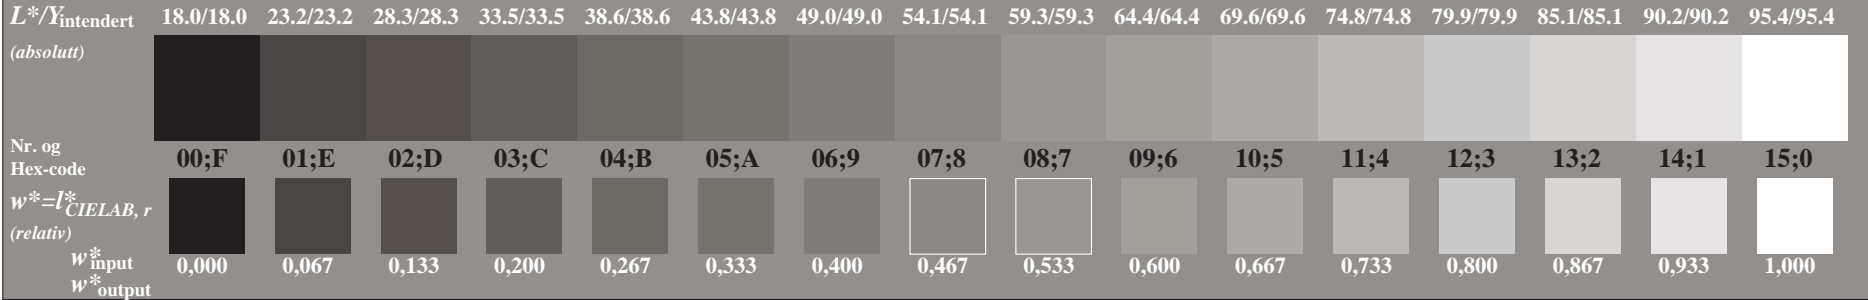


TN790-7, Figur C3Wde: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

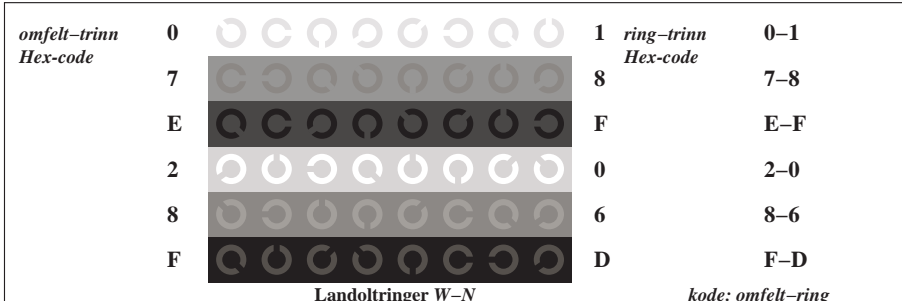

TN791-1, Figur C4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

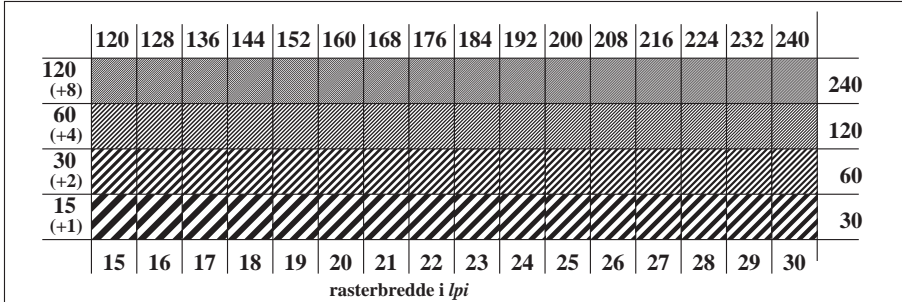

TN791-3, Figur C5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

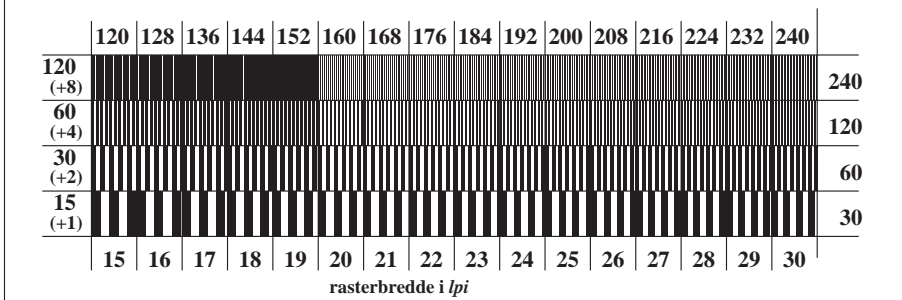



TN791-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*






see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
 technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>


TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
 application for measurement of laser printer output, separation cmyk\* (CMYK)  
 TUB material: code=rh4ta

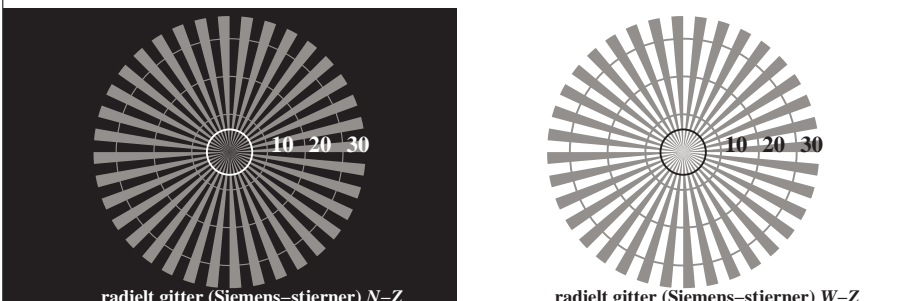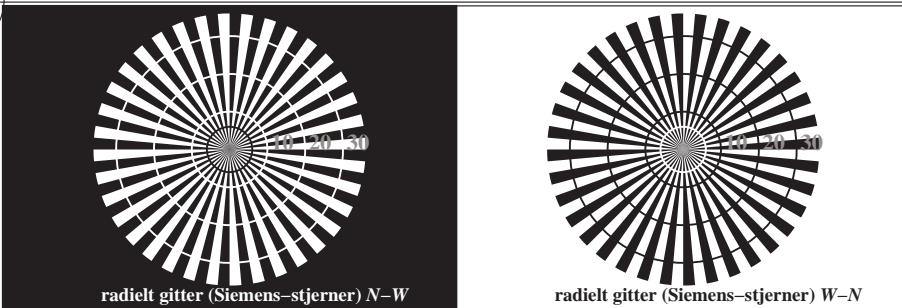


TN790-3, Figur C1Wde: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

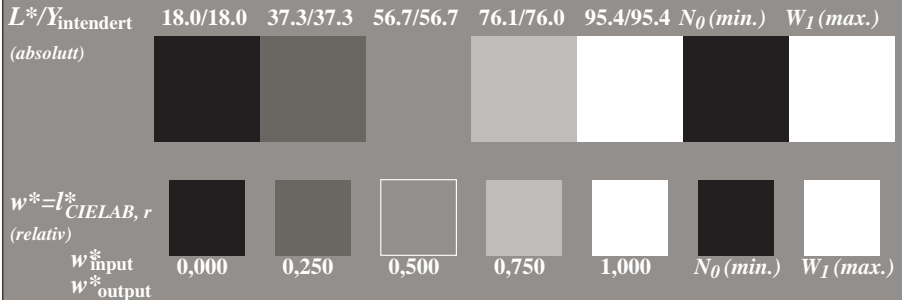


TN790-5, Figur C2Wde: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

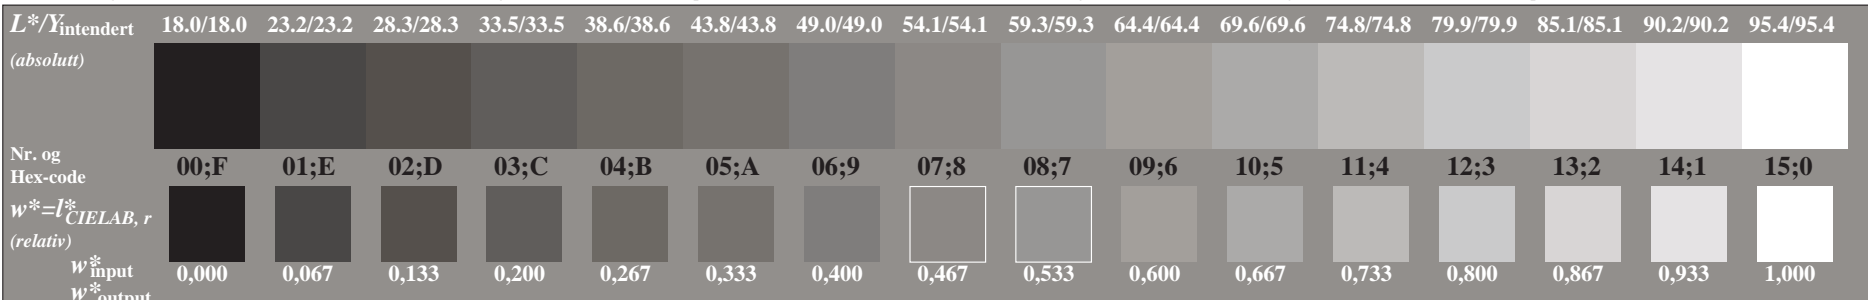


TN790-7, Figur C3Wde: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

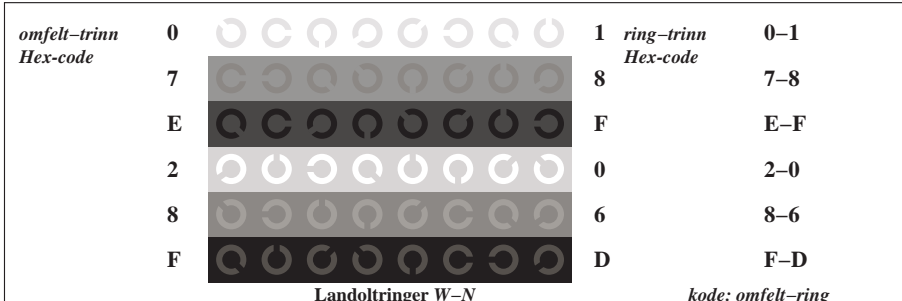

TN791-1, Figur C4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

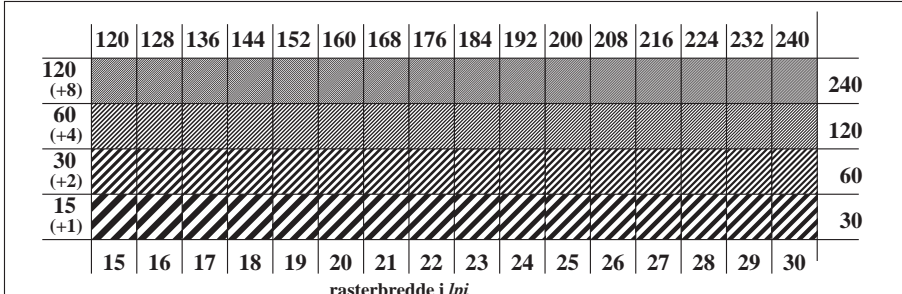

TN791-3, Figur C5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*


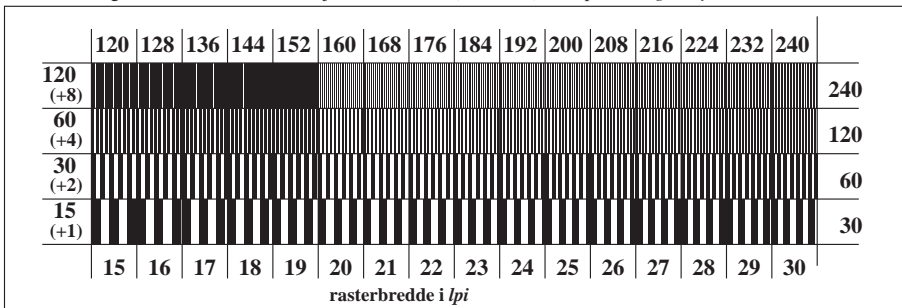


TN791-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*




see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
 technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>


TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
 application for measurement of laser printer output, separation cmyk\* (CMYK)  
 TUB material: code=rh4ta

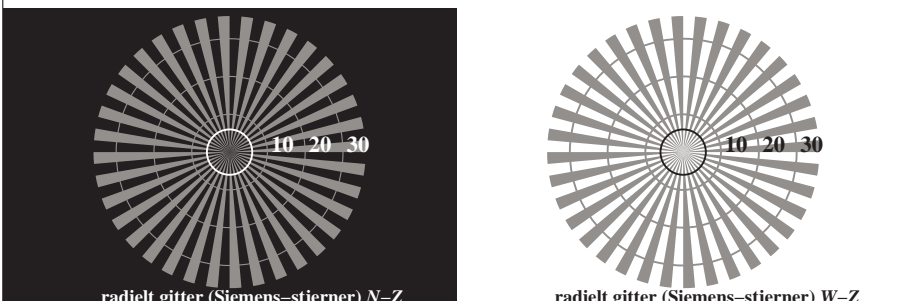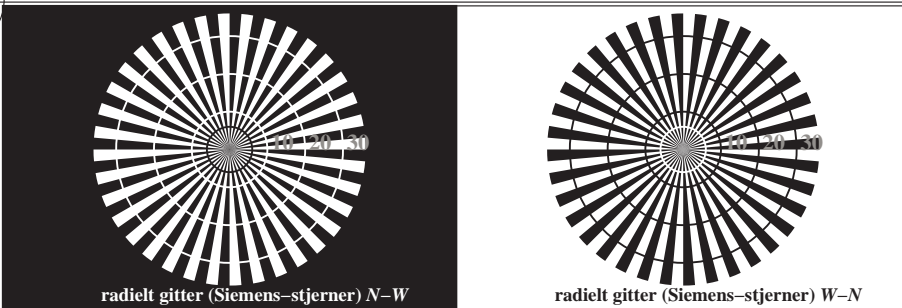


TN790-3, Figur C1Wde: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

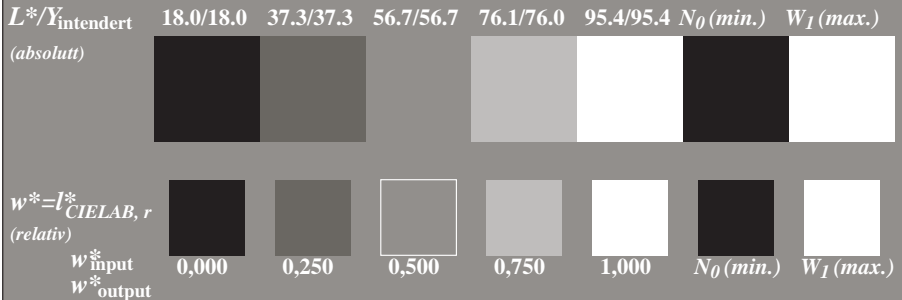


TN790-5, Figur C2Wde: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

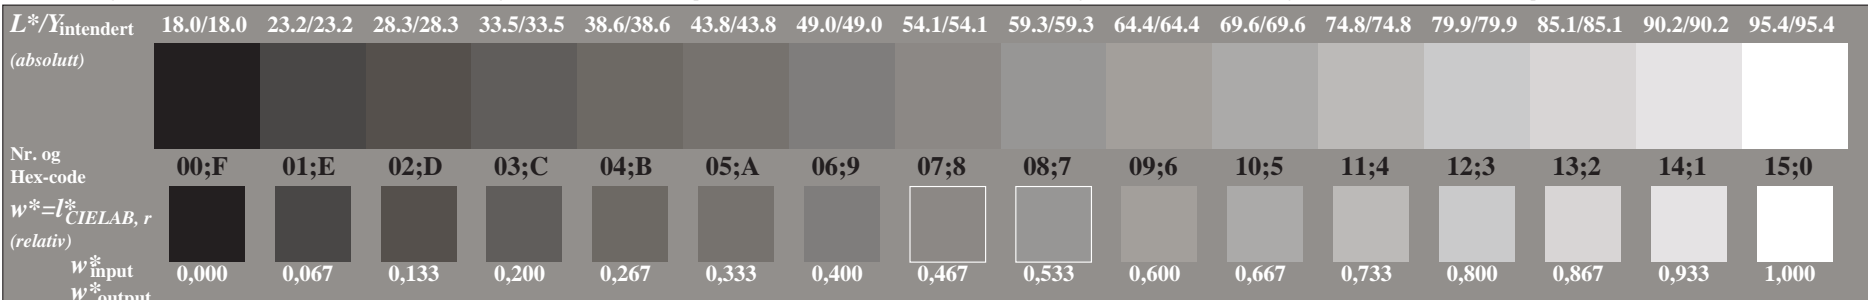


TN790-7, Figur C3Wde: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

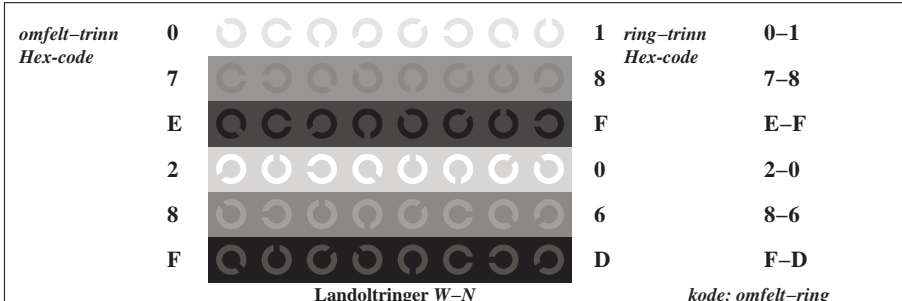

TN791-1, Figur C4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

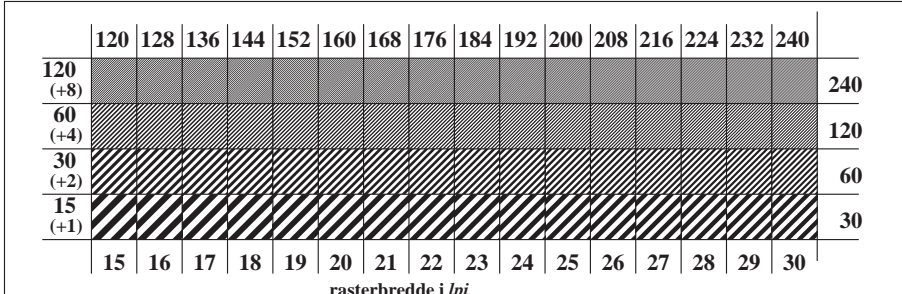

TN791-3, Figur C5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*


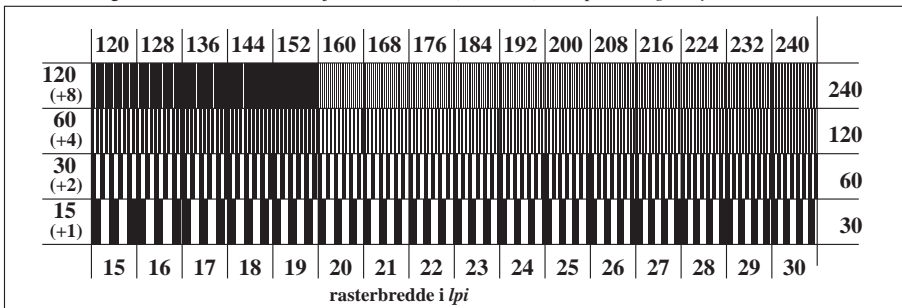


TN791-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*




see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
 technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>


TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
 application for measurement of laser printer output, separation cmyk\* (CMYK)  
 TUB material: code=rh4ta

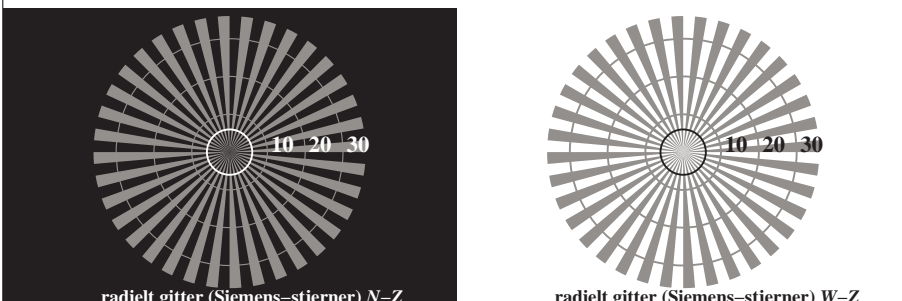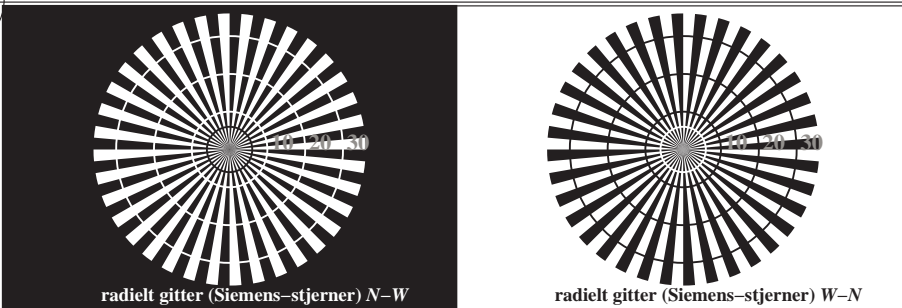


TN790-3, Figur C1Wde: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

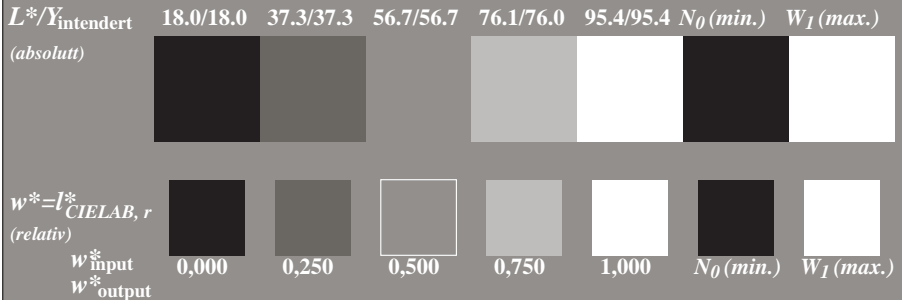


TN790-5, Figur C2Wde: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

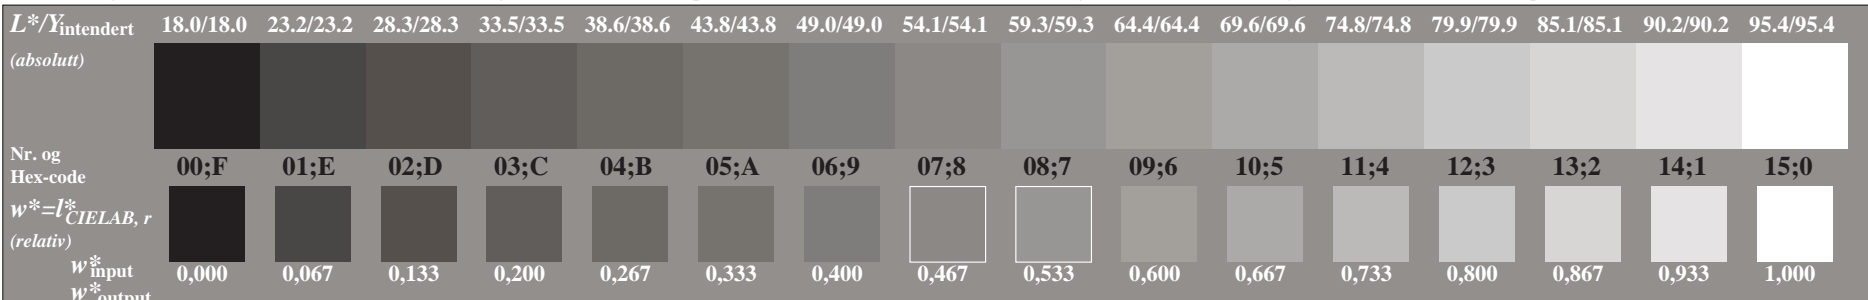


TN790-7, Figur C3Wde: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

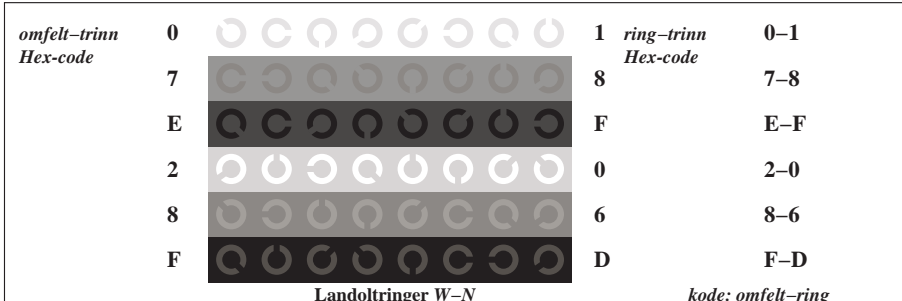

TN791-1, Figur C4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

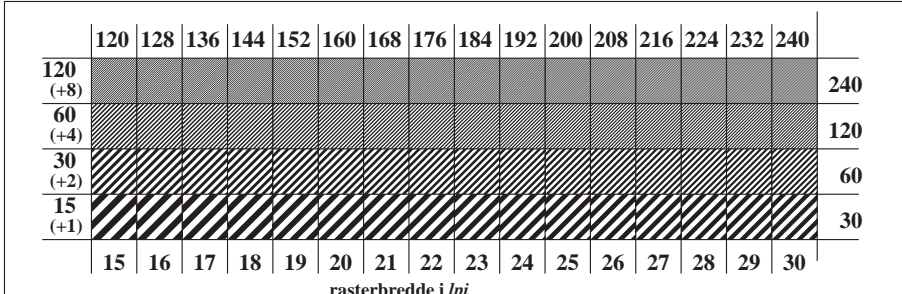

TN791-3, Figur C5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*


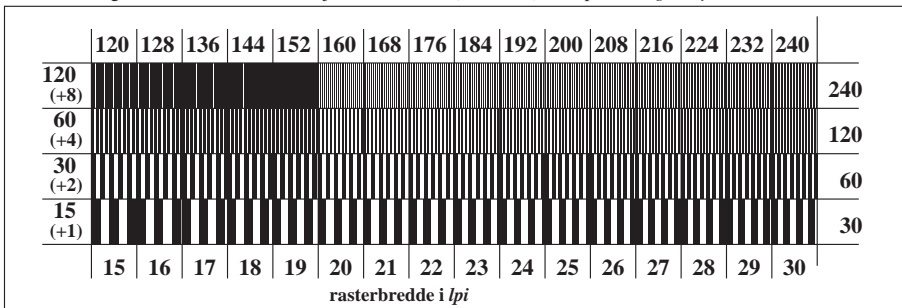


TN791-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*




see similar files: <http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF> / .PS  
 technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmetrik>


TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
 application for measurement of laser printer output, separation cmyk\* (CMYK)  
 TUB material: code=rh4ta

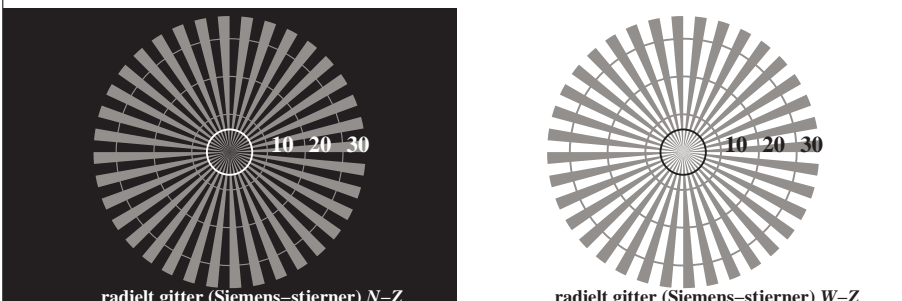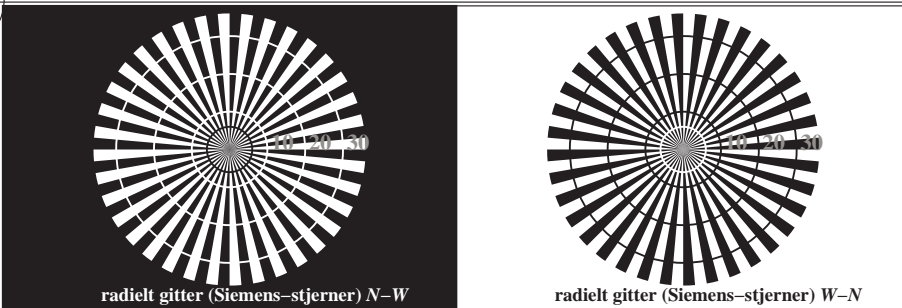


TN790-3, Figur C1Wde: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

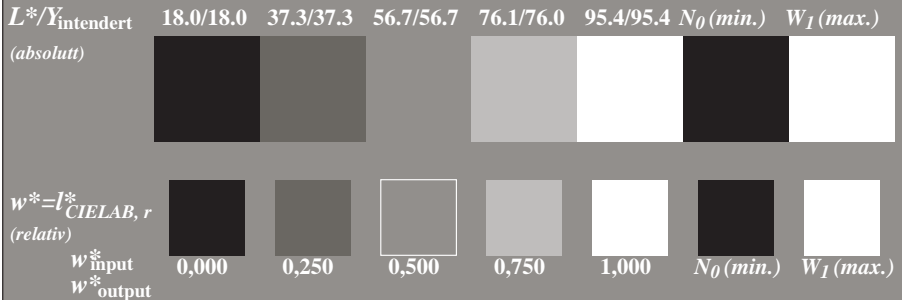


TN790-5, Figur C2Wde: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_I$ ; PS operator: *rgb/cmy0*

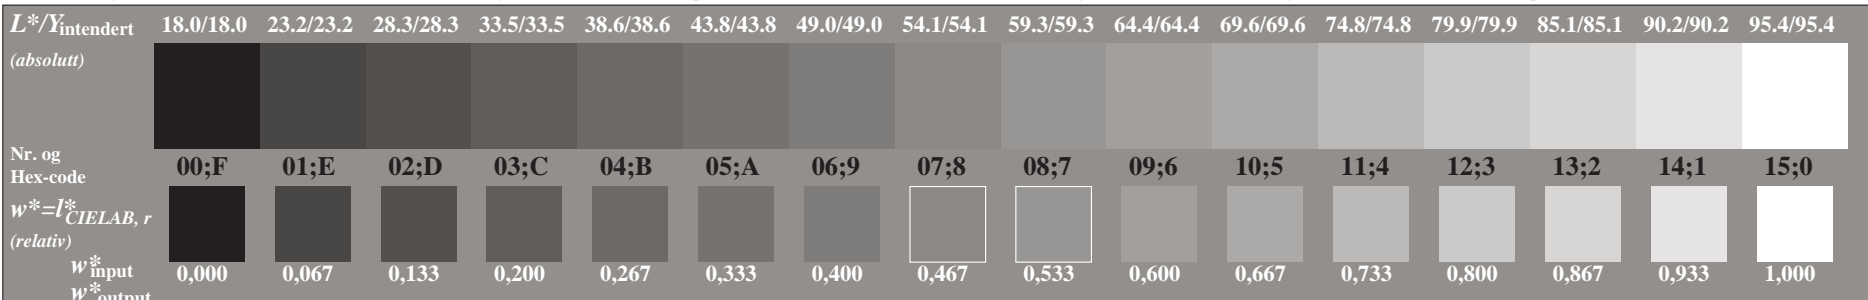


TN790-7, Figur C3Wde: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

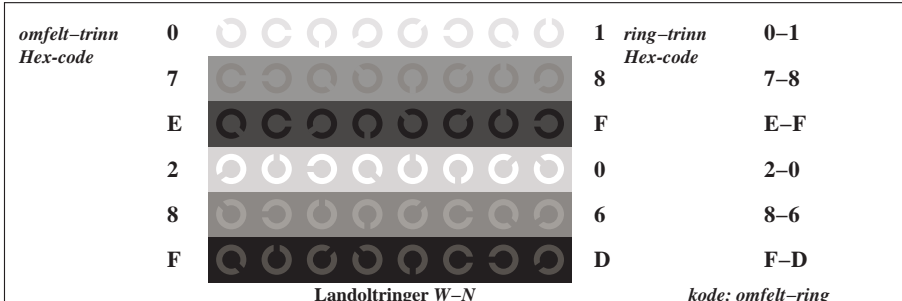

TN791-1, Figur C4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

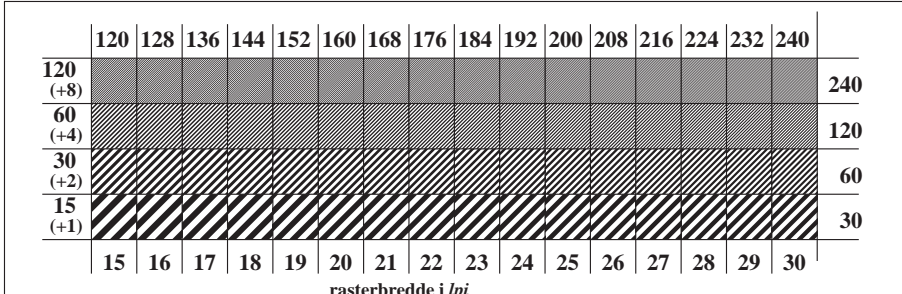

TN791-3, Figur C5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

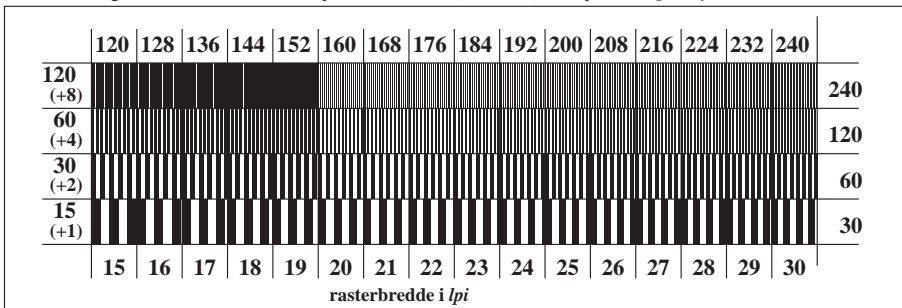

TN791-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*









Table with columns: n=j, HIC\*Fde, rgb\_Fde, icf\_Fde, hsi\_Fde, rgb\*Fde, LabCh\*Fde, cmyn\*sep.Fde, hsiMde, rgb\*Mde, LabCh\*Mde. Rows 0-80. Includes a 'delta' column at the bottom right.

test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: w/rgb/cmyk -> rgb<sub>de</sub>  
colors and differences, ΔE\*, 3D=1, de=1, cmyk\* output: 3D-linearization to cmyk\*<sub>de</sub>

see similar files: http://130.149.60.45/~farbmetrik/TN79/TN79.HTM  
technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik

TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
application for measurement of laser printer output, separation cmyn6\* (CMYK)  
TUB material: code=rha4ta



5-113830-F0

TN790-TN, 9/22-F

5-113830-F0

C M Y O L V

C M Y O L V

C M Y O L V

C M Y O L V

C M Y O L V

C M Y O L V

C M Y O L V









Table with 17 columns: n, HIC\*Fde, rgb\_Fde, icf\_Fde, hsi\_Fde, rgb\*Fde, LabCh\*Fde, cmyn\*sep.Fde, hsiMde, rgb\*Mde, LabCh\*Mde. It contains 33 rows of colorimetric data for various color patches.

test chart TN79; ME16(ISO 9241-306), 3(ISO/IEC 15775)  
colors and differences, ΔE\*, 3D=1, de=1, cmyk\*

input: w/rgb/cmyk -> rgb<sub>de</sub>  
output: 3D-linearization to cmyk\*<sub>de</sub>

see similar files: http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF /.PS  
technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik

TUB registration: 20130201 -TN79/TN79L0FP.PDF /.PS  
application for measurement of laser printer output, separation cmyk\* (CMYK)  
TUB material: code=rha4ta









see similar files: http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF /.PS  
technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik

TUB registration: 20130201-TN79/TN79L0FP.PDF /.PS  
application for measurement of laser printer output, separation cmyk\* (CMYK)  
TUB material: code=rhatha

Table with columns: n, HIC\*Fde, rgb\_Fde, icf\_Fde, hsi\_Fde, rgb\*Fde, LabCh\*Fde, cmy\*sep.Fde, hsiMde, rgb\*Mde, LabCh\*Mde. It contains 67 rows of color calibration data for various printer models and color patches.













TUB registration: 20130201 -TN79/TN79L0FP.PDF /.PS TUB material: code=rha4ta  
 application for measurement of laser printer output, separation cmyk\* (CMYK)

see similar files: http://130.149.60.45/~farbmetrik/TN79/TN79L0FP.PDF  
 technical information: http://www.ps.bam.de or http://130.149.60.45/~farbmetrik

n	HIC*Fde	rgb_Fde	icf_Fde	hsi_Fde	rgb*Fde	LabCh*Fde	cmyn*sep.Fde				hsiMde	rgb*Mde	LabCh*Mde
1053	NW_086de	0.866 0.866 0.866	0.866 0.0 0.866	360	0.866 0.866 0.866	86.1 0.0 0.0	0.0 0.0 0.0	0.0 0.019 0.02 0.164	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1054	NW_093de	0.933 0.933 0.933	0.933 0.0 0.933	360	0.933 0.933 0.933	91.0 0.0 0.0	0.0 0.0 0.0	0.0 0.016 0.005 0.103	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1055	NW_100de	1.0 1.0 1.0	1.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0 0.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1056	NW_000de	0.0 0.0 0.0	0.0 0.0 0.0	360	0.0 0.0 0.0	23.8 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1057	NW_006de	0.066 0.066 0.066	0.066 0.0 0.066	360	0.066 0.066 0.066	28.6 0.0 0.0	0.0 0.0 0.0	0.0 0.016 0.054 0.865	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1058	NW_013de	0.133 0.133 0.133	0.133 0.0 0.133	360	0.133 0.133 0.133	33.4 0.0 0.0	0.0 0.0 0.0	0.0 0.053 0.109 0.809	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1059	NW_020de	0.2 0.2 0.2	0.2 0.0 0.2	360	0.2 0.2 0.2	38.2 0.0 0.0	0.0 0.0 0.0	0.0 0.034 0.068 0.76	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1060	NW_026de	0.266 0.266 0.266	0.266 0.0 0.266	360	0.266 0.266 0.266	42.9 0.0 0.0	0.0 0.0 0.0	0.0 0.039 0.092 0.701	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1061	NW_033de	0.333 0.333 0.333	0.333 0.0 0.333	360	0.333 0.333 0.333	47.8 0.0 0.0	0.0 0.0 0.0	0.0 0.044 0.085 0.652	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1062	NW_040de	0.4 0.4 0.4	0.4 0.0 0.4	360	0.4 0.4 0.4	52.6 0.0 0.0	0.0 0.0 0.0	0.0 0.023 0.048 0.608	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1063	NW_046de	0.466 0.466 0.466	0.466 0.0 0.466	360	0.466 0.466 0.466	57.3 0.0 0.0	0.0 0.0 0.0	0.0 0.038 0.078 0.539	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1064	NW_053de	0.533 0.533 0.533	0.533 0.0 0.533	360	0.533 0.533 0.533	62.2 0.0 0.0	0.0 0.0 0.0	0.0 0.017 0.04 0.482	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1065	NW_060de	0.6 0.6 0.6	0.6 0.0 0.6	360	0.6 0.6 0.6	67.0 0.0 0.0	0.0 0.0 0.0	0.0 0.028 0.064 0.427	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1066	NW_066de	0.666 0.666 0.666	0.666 0.0 0.666	360	0.666 0.666 0.666	71.7 0.0 0.0	0.0 0.0 0.0	0.0 0.015 0.038 0.381	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1067	NW_073de	0.734 0.734 0.734	0.734 0.0 0.734	360	0.734 0.734 0.734	76.6 0.0 0.0	0.0 0.0 0.0	0.0 0.017 0.033 0.301	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1068	NW_080de	0.8 0.8 0.8	0.8 0.0 0.8	360	0.8 0.8 0.8	81.4 0.0 0.0	0.0 0.0 0.0	0.0 0.011 0.011 0.23	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1069	NW_086de	0.866 0.866 0.866	0.866 0.0 0.866	360	0.866 0.866 0.866	86.1 0.0 0.0	0.0 0.0 0.0	0.0 0.019 0.02 0.164	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1070	NW_093de	0.933 0.933 0.933	0.933 0.0 0.933	360	0.933 0.933 0.933	91.0 0.0 0.0	0.0 0.0 0.0	0.0 0.016 0.005 0.103	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1071	NW_100de	1.0 1.0 1.0	1.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0 0.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1072	NW_000de	0.0 0.0 0.0	0.0 0.0 0.0	360	0.0 0.0 0.0	23.8 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1073	NW_100de	1.0 1.0 1.0	1.0 0.0 1.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0 0.0	360	1.0 1.0 1.0	95.8 0.0 0.0	0.0 0.0 0.0	
1074	R00Y_100_100de	1.0 0.0 0.0	1.0 1.0 1.0	390	1.0 0.0 0.263	47.5 56.0 26.7	62.1 25.4	0.0 1.0 0.735 0.0	375	1.0 0.0 0.263	47.5 56.0 26.7	62.1 25.4	
1075	G50B_100_100de	0.0 1.0 1.0	1.0 1.0 0.5	210	0.0 1.0 0.791	54.9 -38.7 -29.1	48.4 216.9	1.0 0.0 0.2 0.0	198	0.0 1.0 0.791	54.9 -38.7 -29.1	48.4 216.9	
1076	Y00G_100_100de	1.0 1.0 0.0	1.0 1.0 0.5	90	1.0 0.768 0.0	83.6 -3.1 76.8	76.9 92.3	0.0 0.231 0.999 0.001	77	1.0 0.768 0.0	83.6 -3.1 76.8	76.9 92.3	
1077	B00R_100_100de	0.0 0.0 1.0	1.0 1.0 0.5	270	0.0 0.261 1.0	37.3 1.4 -48.6	48.7 271.7	1.0 0.738 0.0 0.0	255	0.0 0.261 1.0	37.3 1.4 -48.6	48.7 271.7	
1078	G00B_100_100de	0.0 1.0 0.0	1.0 1.0 0.5	150	0.0 1.0 0.146	53.8 -65.9 21.1	69.2 162.2	0.0 0.943 0.0 0.798	157	0.0 1.0 0.146	53.8 -65.9 21.1	69.2 162.2	
1079	B50R_100_100de	1.0 0.0 1.0	1.0 1.0 0.5	330	0.584 0.0 1.0	38.5 46.7 -28.5	54.7 328.6	0.415 1.0 0.0 0.0	305	0.584 0.0 1.0	38.5 46.7 -28.5	54.7 328.6	

delta

