

Immettere y uscita: Printer Reflective System FRS06a for relative CIELAB hue $h_{ab,a,rel} = h_{ab}/360 = 25/360 = 0.07$


Dati del dispositivo (d) o colori elementari (e):

HIC_e^*

codice di tonalità per i colori questa pagina:

$H_e^* = R00Y_e$

triangolo chiarezza T^*



LRS18a; dati atti CIELAB (a)

name	$L^*=L_a^*$	a_a^*	b_a^*	$C_{ab,a}^*$	$h_{ab,a}^*$
R _e ,Ma	47.5	56.0	26.7	62.1	25
Y _e ,Ma	83.6	-3.1	76.8	76.9	92
G _e ,Ma	53.8	-65.9	21.1	69.2	162
C _e ,Ma	54.9	-38.7	-29.1	48.4	216
B _e ,Ma	37.3	1.4	-48.6	48.7	271
M _e ,Ma	38.5	46.7	-28.5	54.7	328
N _e ,Ma	23.8	0.0	0.0	0.0	0
W _e ,Ma	95.8	0.0	0.0	0.0	0
R _e ,CIE	39.9	58.7	27.9	65.0	25
Y _e ,CIE	81.2	-2.8	71.5	71.6	92
G _e ,CIE	52.2	-42.4	13.6	44.5	162
B _e ,CIE	30.5	1.4	-46.4	46.4	271

Il dati per il massimo colore (Ma):

LabCh_e,Ma: 47 56 26 62 25

HIC_e,Ma: R00Y_100_100_e

rgbic_e,Ma:

1.0 0.0 0.26 1.0 1.0

triangolo chiarezza T^*

%Gamma

$u_{rel}^* = 114$



%Regularità

$g_{H,rel}^* = 28$

$g_{C,rel}^* = 38$

LRS18a; dati atti CIELAB (a)

H_e^*	$L^*=L_a^*$	a_a^*	b_a^*	$C_{ab,a}^*$	$h_{ab,a}^*$
R00Y_100_100 _e	47.5	56.0	26.7	62.1	25
R25Y_100_100 _e	51.4	54.8	47.7	72.6	41
R50Y_100_100 _e	61.8	35.2	58.4	68.2	58
R75Y_100_100 _e	72.3	16.1	68.2	70.1	76
Y00G_100_100 _e	83.6	-3.1	76.8	76.9	92
Y25G_100_100 _e	85.8	-26.4	78.5	82.9	108
Y50G_100_100 _e	71.0	-41.7	54.8	68.9	127
Y75G_100_100 _e	59.9	-58.2	39.3	70.2	145
G00B_100_100 _e	53.8	-65.9	21.1	69.2	162
G25B_100_100 _e	55.0	-51.6	-8.7	52.3	189
G50B_100_100 _e	54.9	-38.7	-29.1	48.4	216
G75B_100_100 _e	51.7	-23.3	-48.6	53.9	244
B00R_100_100 _e	37.3	1.4	-48.6	48.7	271
B25R_100_100 _e	31.5	24.4	-41.9	48.5	300
B50R_100_100 _e	38.5	46.7	-28.5	54.7	328
B75R_100_100 _e	49.4	65.5	-9.1	66.2	352

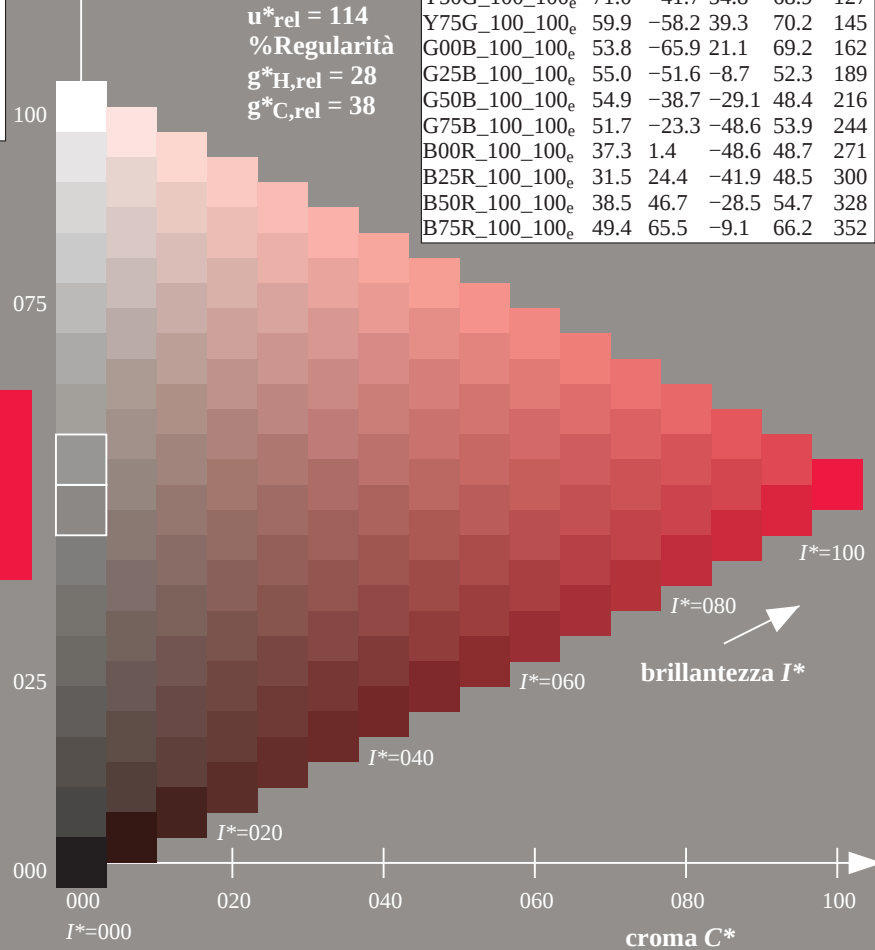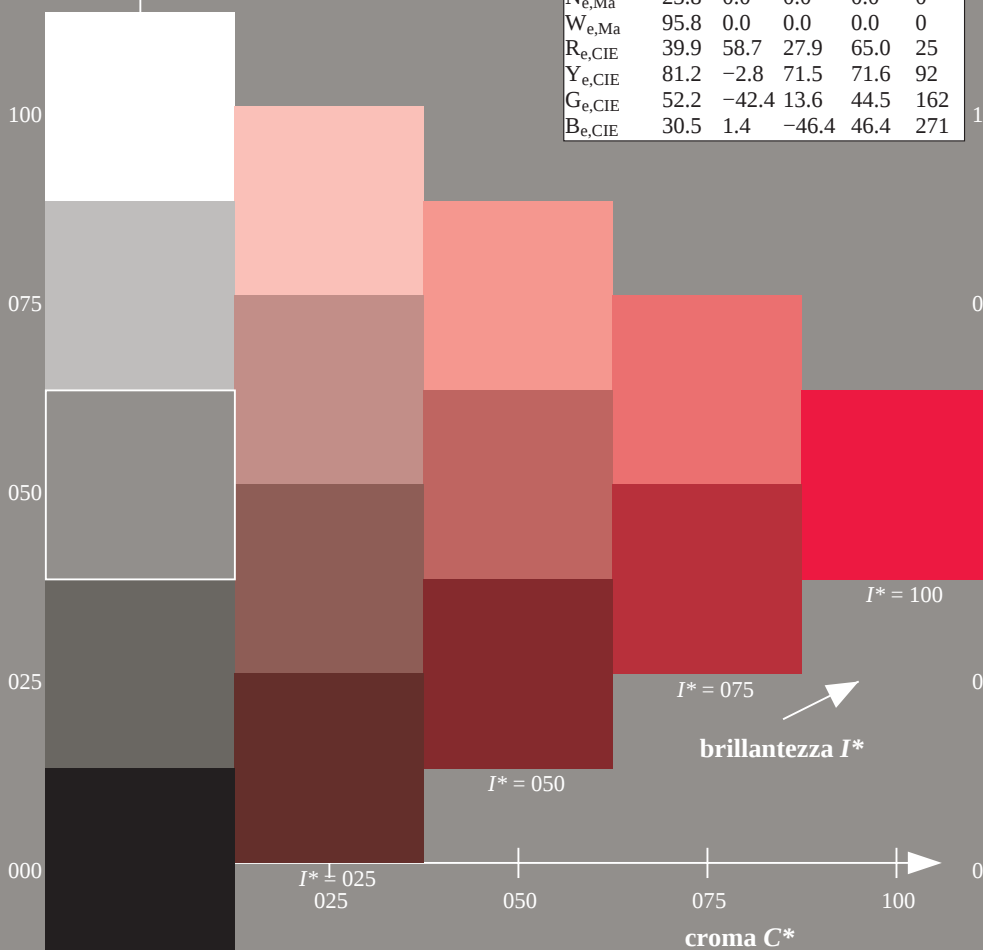

4-113130-L0 PI990-73

grafico TUB-PI99; codice di tinte: $H_e^*=R00Y_e$

grafico conformemente a DIN 33872, 3D=1, de=1, cmyk*

Input: rgb/cmyk $\rightarrow$ rgb_{de}

Output: 3D-linearizzazione a cmyk*_{de}