


Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for D65, $Y_{w,10}=100$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code
0 405	31 556	31.74	56.57	106.53	0.1629	0.2903	0.5467	195.0	15 476	37 585	Cm
6 435	31 557	28.0	57.42	83.63	0.1656	0.3396	0.4947	176.6	16 480	44 621	
10 450	31 559	22.06	57.53	46.52	0.1749	0.4561	0.3689	137.9	18 491	-1 491c	
11 460	32 562	22.29	59.27	37.3	0.1875	0.4986	0.3137	126.9	19 498	-1 498c	
12 465	33 565	22.82	60.92	28.98	0.2025	0.5403	0.2571	117.9	21 506	-1 506c	
14 470	34 570	24.62	63.07	16.02	0.2373	0.6081	0.1544	105.3	24 522	-1 522c	
15 475	35 579	31.53	68.64	11.53	0.2822	0.6144	0.1032	96.3	26 533	-1 533c	Gm
16 480	41 606	54.03	81.94	8.23	0.3746	0.5682	0.0571	75.5	30 550	-1 550c	
16 485	-1 484c	77.05	92.3	8.23	0.4339	0.5197	0.0463	57.5	32 560	10 454	
18 490	-1 490c	76.87	89.06	4.2	0.4518	0.5234	0.0247	54.3	32 562	11 459	max
19 495	-1 495c	76.85	87.05	2.97	0.4605	0.5216	0.0178	52.4	32 563	12 461	
19 500	-1 499c	76.85	87.05	2.97	0.4605	0.5216	0.0178	52.4	32 563	12 461	
22 510	-1 510c	76.43	79.1	1.01	0.4882	0.5052	0.0064	44.9	33 566	13 466	
23 520	-1 519c	76.0	75.81	0.68	0.4983	0.4971	0.0045	41.9	33 568	13 468	Ym
26 530	-1 530c	73.15	64.17	0.16	0.532	0.4667	0.0012	31.8	34 573	14 472	
27 540	-1 539c	71.61	59.9	0.08	0.5441	0.4551	0.0006	28.3	35 576	14 473	
28 545	-1 544c	69.75	55.54	0.04	0.5565	0.4431	0.0003	24.7	35 578	14 474	
29 550	-1 549c	67.56	51.12	0.01	0.5691	0.4306	0.0001	21.3	36 580	15 475	
31 555	-1 555c	62.15	42.37	0.0	0.5946	0.4053	0.0	14.8	37 586	15 476	
32 560	10 451	70.49	40.04	58.45	0.4171	0.2369	0.3458	317.7	-1 492c	18 492	
31 556	0 405	63.06	43.42	0.8	0.5877	0.4047	0.0074	15.0	37 585	15 476	Rm
31 557	6 435	66.81	42.57	23.7	0.5019	0.3199	0.178	356.6	44 621	16 480	
31 559	10 450	72.75	42.46	60.8	0.4132	0.2412	0.3454	317.9	-1 491c	18 491	
32 562	11 460	72.51	40.72	70.03	0.3956	0.2222	0.3821	307.0	-1 498c	19 498	
33 565	12 465	71.98	39.07	78.34	0.38	0.2063	0.4136	298.0	-1 506c	21 506	
34 570	14 470	70.19	36.92	91.31	0.3537	0.186	0.4601	285.4	-1 522c	24 522	
35 579	15 475	63.28	31.35	95.79	0.3323	0.1646	0.503	276.3	-1 533c	26 533	Mm
41 606	16 480	40.77	18.05	99.09	0.2581	0.1143	0.6275	255.6	-1 550c	30 550	
-1 484c	16 485	17.75	7.69	99.09	0.1425	0.0618	0.7956	237.5	10 454	32 560	
-1 490c	18 490	17.94	10.93	103.13	0.1359	0.0828	0.7812	234.3	11 459	32 562	min
-1 495c	19 495	17.96	12.94	104.35	0.1327	0.0957	0.7714	232.4	12 461	32 563	
-1 499c	19 500	17.96	12.94	104.35	0.1327	0.0957	0.7714	232.4	12 461	32 563	
-1 510c	22 510	18.38	20.89	106.32	0.1262	0.1435	0.7302	224.9	13 466	33 566	
-1 519c	23 520	18.8	24.18	106.64	0.1256	0.1616	0.7126	222.0	13 468	33 568	Bm
-1 530c	26 530	21.65	35.82	107.16	0.1315	0.2175	0.6508	211.8	14 472	34 573	
-1 539c	27 540	23.19	40.09	107.24	0.136	0.2351	0.6288	208.3	14 473	35 576	
-1 544c	28 545	25.05	44.45	107.29	0.1417	0.2514	0.6068	204.8	14 474	35 578	
-1 549c	29 550	27.25	48.87	107.32	0.1485	0.2664	0.585	201.3	15 475	36 580	
-1 555c	31 555	32.65	57.62	107.33	0.1652	0.2916	0.5431	194.8	15 476	37 586	
10 451	32 560	24.31	59.95	48.88	0.1826	0.4502	0.367	137.6	18 492	-1 492c	
380	770	94.81	100.0	107.33	0.3137	0.3309	0.3552	0.0			









TUB-test chart CE30; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant D65; diagram for illuminant D65, $Y_{w,10}=100$

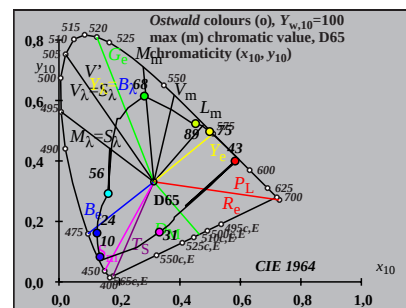

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for P40, $Y_{w,10}=100$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code		
0	405	32	563	28.47	54.51	64.02	0.1937	0.3708	0.4354	181.4	16 481 38 591	Cm	
7	435	32	564	25.4	54.82	45.87	0.2014	0.4347	0.3638	161.8	17 487 -1 487c		
10	450	33	565	23.18	55.07	29.74	0.2146	0.5099	0.2753	141.2	19 495 -1 495c		
12	460	33	567	22.73	55.74	19.55	0.2319	0.5686	0.1994	127.9	21 505 -1 505c		
12	465	33	568	24.04	57.17	19.55	0.2386	0.5673	0.194	126.8	21 506 -1 506c		
14	470	34	571	25.22	58.4	11.45	0.2652	0.6142	0.1204	116.0	24 521 -1 521c		
15	475	35	576	29.04	61.5	8.53	0.2931	0.6206	0.0861	109.9	26 531 -1 531c	Gm	
16	480	37	585	38.18	67.98	6.3	0.3394	0.6044	0.056	100.5	28 542 -1 542c		
17	485	42	611	65.29	82.81	4.63	0.4274	0.5421	0.0303	74.7	31 558 -1 558c		
17	490	-1 489c	91.31	94.15	4.63	0.4803	0.4952	0.0243	50.6	33 566 11 458	max		
19	495	-1 495c	91.26	91.34	2.45	0.4931	0.4935	0.0132	46.7	33 568 12 463			
20	500	-1 500c	91.22	89.52	1.76	0.4998	0.4905	0.0096	44.3	33 569 13 465			
22	510	-1 510c	90.92	84.94	0.88	0.5143	0.4805	0.005	38.4	34 571 13 469			
23	520	-1 519c	90.55	82.13	0.61	0.5225	0.4739	0.0035	35.0	34 572 14 471	Ym		
25	530	-1 529c	89.15	75.59	0.25	0.5403	0.4581	0.0015	27.5	35 575 14 474			
28	540	-1 540c	84.88	63.89	0.03	0.5703	0.4293	0.0002	15.9	36 581 15 477			
28	545	-1 544c	84.88	63.89	0.03	0.5703	0.4293	0.0002	15.9	36 581 15 477			
30	550	-1 550c	80.29	55.35	0.0	0.5919	0.408	0.0	8.7	37 585 15 479			
31	555	-1 555c	77.38	50.95	0.0	0.6029	0.397	0.0	5.5	37 587 16 480			
31	560	-1 559c	77.38	50.95	0.0	0.6029	0.397	0.0	5.5	37 587 16 480			
32	563	0	405	73.27	45.48	0.42	0.6147	0.3816	0.0035	1.4	38 591 16 481	Rm	
32	564	7	435	76.34	45.17	18.57	0.5449	0.3224	0.1325	341.9	-1 487c 17 487		
33	565	10	450	78.56	44.92	34.7	0.4966	0.2839	0.2193	321.3	-1 495c 19 495		
33	567	12	460	79.01	44.25	44.88	0.4698	0.2631	0.2669	307.9	-1 505c 21 505		
33	568	12	465	77.7	42.82	44.88	0.4697	0.2589	0.2713	306.8	-1 506c 21 506		
34	571	14	470	76.52	41.59	52.99	0.4472	0.243	0.3097	296.1	-1 521c 24 521		
35	576	15	475	72.7	38.49	55.9	0.435	0.2303	0.3345	290.0	-1 531c 26 531	Mm	
37	585	16	480	63.56	32.01	58.13	0.4135	0.2082	0.3782	280.6	-1 542c 28 542		
42	611	17	485	36.45	17.18	59.81	0.3213	0.1514	0.5272	254.8	-1 558c 31 558		
-1 489c	17	490	10.43	5.84	59.81	0.1371	0.0767	0.786	230.6	11 458 33 566	min		
-1 495c	19	495	10.48	8.65	61.99	0.1292	0.1066	0.764	226.7	12 463 33 568			
-1 500c	20	500	10.52	10.47	62.68	0.1257	0.1251	0.7491	224.3	13 465 33 569			
-1 510c	22	510	10.83	15.05	63.55	0.121	0.1683	0.7106	218.4	13 469 34 571			
-1 519c	23	520	11.19	17.86	63.83	0.1205	0.1922	0.6871	215.0	14 471 34 572	Bm		
-1 529c	25	530	12.59	24.4	64.18	0.1244	0.2412	0.6343	207.5	14 474 35 575			
-1 540c	28	540	16.86	36.1	64.4	0.1436	0.3075	0.5487	195.9	15 477 36 581			
-1 544c	28	545	16.86	36.1	64.4	0.1436	0.3075	0.5487	195.9	15 477 36 581			
-1 550c	30	550	21.45	44.64	64.44	0.1643	0.342	0.4936	188.7	15 479 37 585			
-1 555c	31	555	24.36	49.04	64.44	0.1767	0.3557	0.4675	185.5	16 480 37 587			
-1 559c	31	560	24.36	49.04	64.44	0.1767	0.3557	0.4675	185.5	16 480 37 587			
380	770	101.75	100.0	64.44	0.3822	0.3756	0.2421	0.0					









TUB-test chart CE30; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant P40; diagram for illuminant P40, $Y_{w,10}=100$

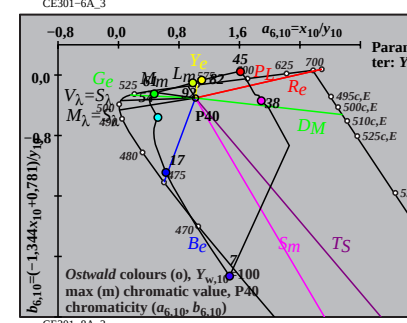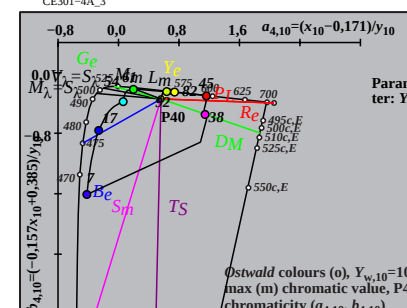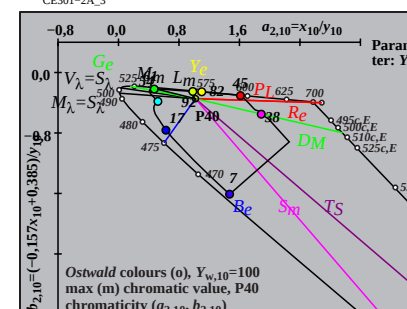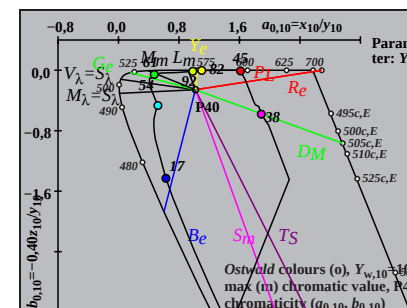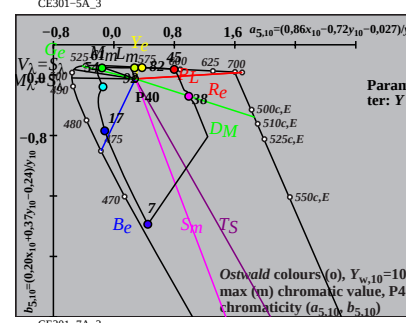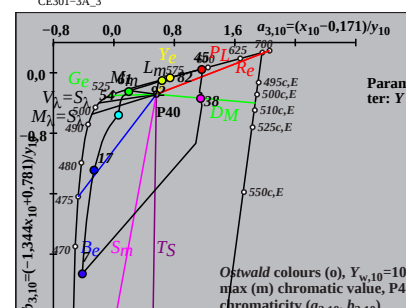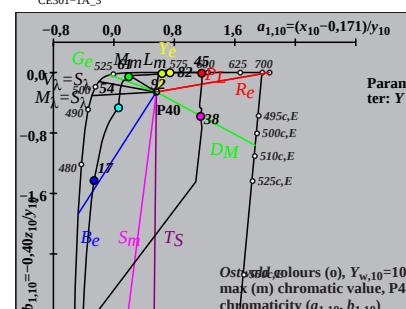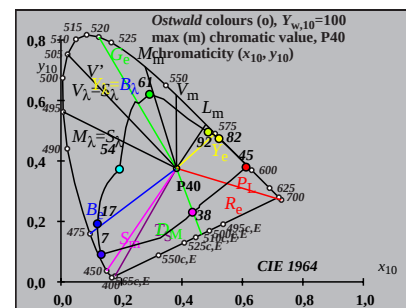

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for A00, $Y_{w,10}=100$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code
1 405	34 570	27.56	52.26	34.82	0.2404	0.4558	0.3037	166.6	17 487	39 597	Cm
7 435	34 570	26.38	52.46	26.9	0.2494	0.4961	0.2544	155.9	18 491	47 639	
9 450	34 571	25.87	52.77	21.46	0.2584	0.5271	0.2144	147.8	19 495	-1 495c	
12 460	34 572	25.18	52.99	12.78	0.2768	0.5826	0.1405	134.6	21 505	-1 505c	
13 465	34 573	25.59	53.47	10.16	0.2867	0.5992	0.1139	130.3	22 512	-1 512c	
14 470	34 574	26.64	54.4	7.89	0.2995	0.6116	0.0887	126.3	24 520	-1 520c	
15 475	35 576	28.78	55.98	6.04	0.3169	0.6164	0.0665	122.5	25 528	-1 528c	Gm
16 480	36 581	33.1	59.09	4.58	0.342	0.6105	0.0474	118.0	27 537	-1 537c	
17 485	37 588	41.89	64.82	3.45	0.3802	0.5884	0.0313	111.2	29 547	-1 547c	
18 490	41 609	67.88	78.98	2.58	0.4542	0.5284	0.0173	88.5	32 561	-1 561c	max
19 495	-1 495c	105.71	94.47	1.92	0.523	0.4674	0.0095	40.5	34 573	13 465	
20 500	-1 500c	105.69	93.13	1.41	0.5278	0.4651	0.007	37.6	34 573	13 468	
21 510	-1 509c	105.61	91.52	1.03	0.5329	0.4618	0.0052	34.3	34 574	14 470	
24 520	-1 520c	104.68	84.75	0.35	0.5515	0.4465	0.0018	22.0	35 577	15 476	Ym
25 530	-1 529c	103.98	81.86	0.23	0.5588	0.4399	0.0012	17.5	35 578	15 477	
27 540	-1 539c	101.75	75.17	0.07	0.5748	0.4246	0.0004	8.6	36 581	16 480	
29 545	-1 545c	98.18	67.47	0.01	0.5926	0.4072	0.0	0.5	37 585	16 483	
30 550	-1 550c	95.8	63.33	0.0	0.602	0.3979	0.0	356.9	37 587	16 484	
31 555	-1 555c	92.94	59.02	0.0	0.6116	0.3883	0.0	353.7	37 589	17 485	
32 560	-1 560c	89.59	54.59	0.0	0.6213	0.3786	0.0	350.9	38 592	17 486	
34 570	1 405	83.58	47.73	0.37	0.6346	0.3624	0.0028	346.6	39 597	17 487	Rm
34 570	7 435	84.76	47.53	8.29	0.6029	0.338	0.0589	335.9	47 639	18 491	
34 571	9 450	85.27	47.22	13.73	0.5831	0.3229	0.0939	327.8	-1 495c	19 495	
34 572	12 460	85.96	47.0	22.41	0.5532	0.3024	0.1442	314.6	-1 505c	21 505	
34 573	13 465	85.55	46.52	25.03	0.5445	0.2961	0.1593	310.4	-1 512c	22 512	
34 574	14 470	84.5	45.59	27.3	0.5368	0.2896	0.1734	306.4	-1 520c	24 520	
35 576	15 475	82.36	44.01	29.15	0.5295	0.2829	0.1874	302.5	-1 528c	25 528	Mm
36 581	16 480	78.04	40.9	30.61	0.5218	0.2735	0.2046	298.1	-1 537c	27 537	
37 588	17 485	69.25	35.17	31.74	0.5086	0.2582	0.2331	291.2	-1 547c	29 547	
41 609	18 490	43.26	21.01	32.61	0.4465	0.2169	0.3365	268.6	-1 561c	32 561	min
-1 495c	19 495	5.43	5.52	33.27	0.1228	0.1248	0.7523	220.5	13 465	34 573	
-1 500c	20 500	5.45	6.86	33.78	0.1184	0.1488	0.7327	217.6	13 468	34 573	
-1 509c	21 510	5.53	8.47	34.16	0.1148	0.1759	0.7091	214.3	14 470	34 574	
-1 520c	24 520	6.46	15.24	34.84	0.1143	0.2695	0.616	202.0	15 476	35 577	Bm
-1 529c	25 530	7.16	18.13	34.96	0.1189	0.3009	0.5801	197.5	15 477	35 578	
-1 539c	27 540	9.39	24.82	35.12	0.1354	0.358	0.5065	188.6	16 480	36 581	
-1 545c	29 545	12.96	32.52	35.18	0.1606	0.4031	0.4361	180.5	16 483	37 585	
-1 550c	30 550	15.34	36.66	35.19	0.1759	0.4204	0.4035	176.9	16 484	37 587	
-1 555c	31 555	18.2	40.97	35.19	0.1928	0.4341	0.3729	173.7	17 485	37 589	
-1 560c	32 560	21.55	45.4	35.19	0.211	0.4444	0.3445	170.8	17 486	38 592	
380	770	111.15	99.99	35.19	0.4511	0.4059	0.1428	0.0			









TUB-test chart CE30; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant A00; diagram for illuminant A00, $Y_{w,10}=100$

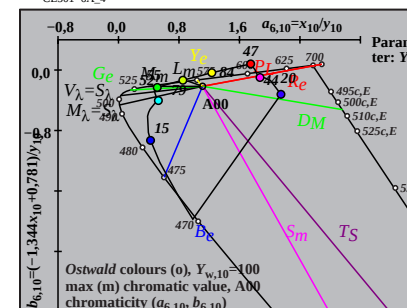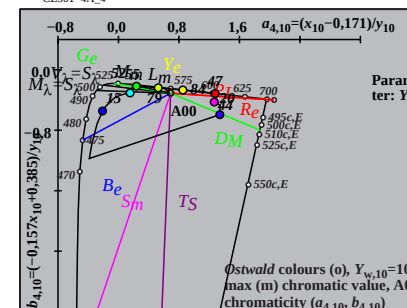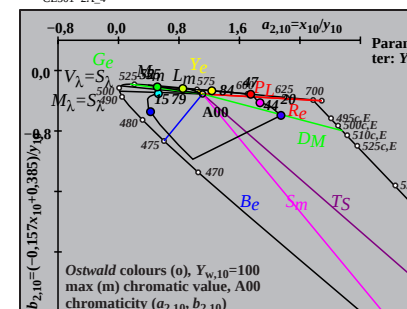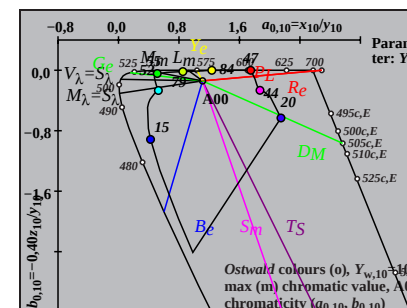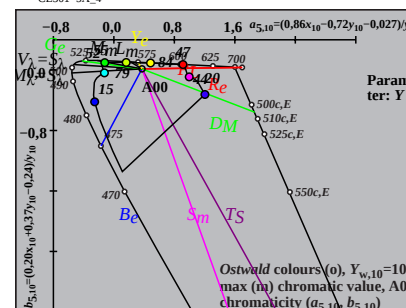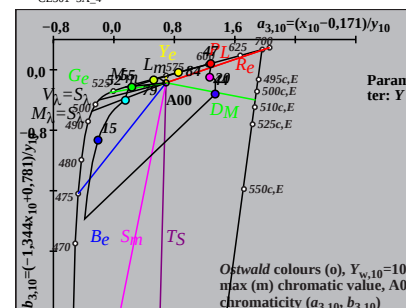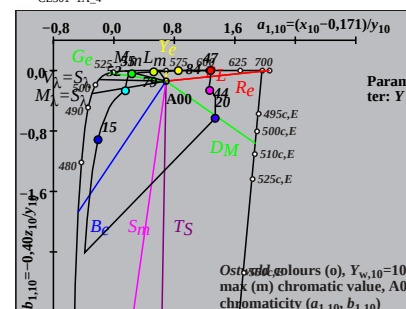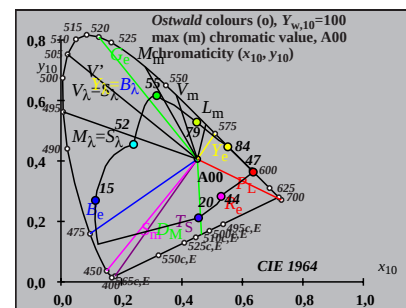

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for E00, $Y_{w,10}=100$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code
1 405	31 559	31.81	55.67	97.76	0.1717	0.3005	0.5277	191.4	15 477	37 589	Cm
7 435	32 561	26.26	56.07	65.86	0.1772	0.3783	0.4444	163.8	16 484	-1 484c	
10 450	32 562	22.59	56.42	40.33	0.1893	0.4727	0.3379	135.9	18 493	-1 493c	
12 460	33 565	21.82	57.5	25.45	0.2082	0.5488	0.2429	120.1	21 506	-1 506c	
13 465	33 568	22.86	58.96	19.29	0.2261	0.583	0.1908	113.2	23 515	-1 515c	
13 470	34 572	26.58	62.72	19.29	0.2447	0.5775	0.1776	109.9	24 520	-1 520c	
14 475	36 581	33.17	68.2	14.26	0.2868	0.5897	0.1233	100.2	26 532	-1 532c	Gm
16 480	40 604	54.71	80.28	7.52	0.3839	0.5632	0.0528	77.5	30 551	-1 551c	
17 485	-1 485c	83.11	91.81	5.41	0.4608	0.5091	0.03	54.0	32 564	11 456	
18 490	-1 490c	83.06	90.24	3.87	0.4688	0.5093	0.0218	52.3	32 564	11 458	max
19 495	-1 495c	83.04	88.4	2.76	0.4766	0.5074	0.0158	50.5	33 565	12 460	
20 500	-1 500c	83.0	86.28	1.95	0.4847	0.5038	0.0113	48.3	33 566	12 462	
22 510	-1 510c	82.66	81.07	0.95	0.5019	0.4922	0.0057	43.2	33 569	13 466	
23 520	-1 519c	82.25	77.97	0.64	0.5113	0.4846	0.004	40.3	34 570	13 468	Ym
25 530	-1 529c	80.75	70.93	0.26	0.5314	0.4668	0.0017	33.9	34 573	14 470	
27 540	-1 539c	78.13	63.03	0.08	0.5531	0.4462	0.0006	27.1	35 577	14 473	
29 545	-1 545c	74.25	54.64	0.01	0.576	0.4238	0.0001	20.4	36 582	15 475	
29 550	-1 549c	74.25	54.64	0.01	0.576	0.4238	0.0001	20.4	36 582	15 475	
31 555	-1 555c	68.97	46.09	0.0	0.5993	0.4005	0.0	14.1	37 587	15 476	
32 560	3 415	67.16	41.99	6.5	0.5806	0.3631	0.0562	6.8	39 595	15 478	
31 559	1 405	68.17	44.32	2.24	0.5941	0.3862	0.0195	11.4	37 589	15 477	Rm
32 561	7 435	73.72	43.92	34.14	0.4857	0.2893	0.2249	343.9	-1 484c	16 484	
32 562	10 450	77.39	43.57	59.67	0.4284	0.2412	0.3303	315.9	-1 493c	18 493	
33 565	12 460	78.17	42.49	74.55	0.4004	0.2176	0.3819	300.1	-1 506c	21 506	
33 568	13 465	77.12	41.03	80.71	0.3878	0.2063	0.4058	293.2	-1 515c	23 515	
34 572	13 470	73.4	37.27	80.71	0.3835	0.1947	0.4217	289.9	-1 520c	24 520	
36 581	14 475	66.81	31.79	85.74	0.3624	0.1724	0.4651	280.2	-1 532c	26 532	Mm
40 604	16 480	45.27	19.71	92.48	0.2874	0.1252	0.5873	257.6	-1 551c	30 551	
-1 485c	17 485	16.87	8.18	94.59	0.141	0.0683	0.7905	234.0	11 456	32 564	
-1 490c	18 490	16.92	9.75	96.13	0.1377	0.0794	0.7827	232.4	11 458	32 564	min
-1 495c	19 495	16.94	11.59	97.24	0.1346	0.0921	0.7731	230.5	12 460	33 565	
-1 500c	20 500	16.98	13.71	98.05	0.1319	0.1065	0.7615	228.4	12 462	33 566	
-1 510c	22 510	17.33	18.92	99.05	0.128	0.1398	0.732	223.3	13 466	33 569	
-1 519c	23 520	17.73	22.02	99.36	0.1274	0.1583	0.7141	220.3	13 468	34 570	Bm
-1 529c	25 530	19.23	29.06	99.74	0.1299	0.1963	0.6737	213.9	14 470	34 573	
-1 539c	27 540	21.85	36.96	99.92	0.1376	0.2328	0.6294	207.1	14 473	35 577	
-1 545c	29 545	25.73	45.35	99.99	0.1504	0.2651	0.5844	200.4	15 475	36 582	
-1 549c	29 550	25.73	45.35	99.99	0.1504	0.2651	0.5844	200.4	15 475	36 582	
-1 555c	31 555	31.01	53.9	100.0	0.1677	0.2914	0.5407	194.1	15 476	37 587	
3 415	32 560	32.82	58.0	93.5	0.178	0.3146	0.5072	186.8	15 478	39 595	
380	770	99.99	99.99	100.0	0.3333	0.3333	0.3333	0.0			









TUB-test chart CE30; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant E00; diagram for illuminant E00, $Y_{w,10}=100$

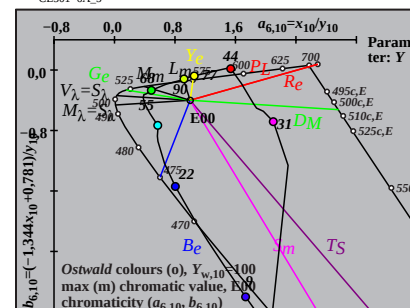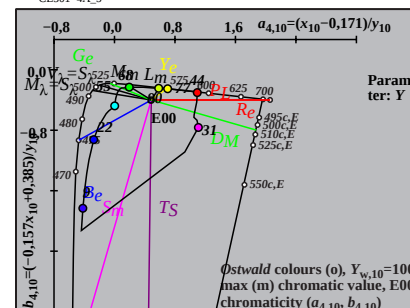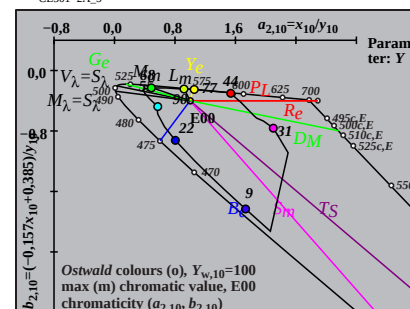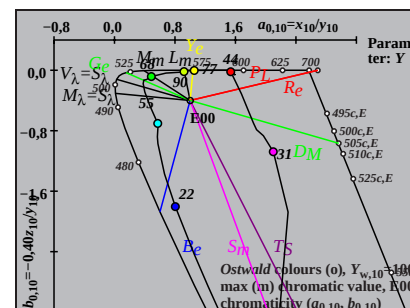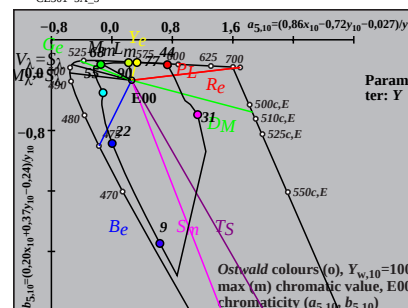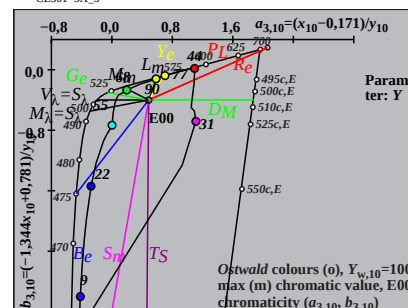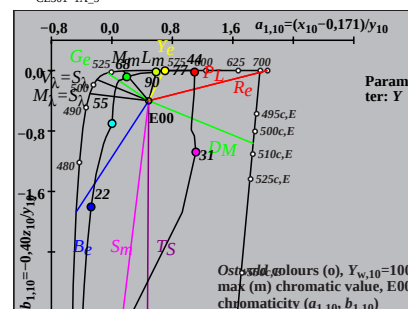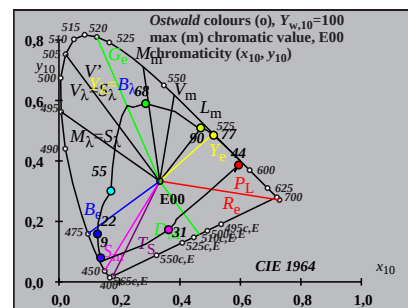

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for C00, $Y_{w,10}=100$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code
1 405	31 556	33.05	55.88	114.54	0.1624	0.2746	0.5629	196.7	15 475	37 586	Cm
6 435	31 558	29.02	56.84	89.59	0.1654	0.3239	0.5106	178.0	16 480	44 623	
9 450	32 560	24.41	57.53	59.0	0.1732	0.4081	0.4185	146.9	17 487	-1 487c	
12 460	32 563	21.53	58.32	30.51	0.1951	0.5284	0.2764	118.8	20 504	-1 504c	
12 465	33 566	23.84	60.99	30.51	0.2066	0.5287	0.2645	116.2	21 507	-1 507c	
13 470	34 572	27.07	64.68	22.96	0.236	0.5638	0.2001	106.8	24 520	-1 520c	
14 475	36 582	35.09	71.25	16.77	0.285	0.5787	0.1362	95.5	26 533	-1 533c	Gm
16 480	44 622	65.72	86.65	8.48	0.4085	0.5386	0.0527	65.8	31 556	0 403	
17 485	-1 485c	77.8	90.11	5.93	0.4475	0.5183	0.0341	55.4	32 562	11 456	
18 490	-1 490c	77.75	88.26	4.11	0.457	0.5188	0.0241	53.7	32 563	11 459	max
19 495	-1 495c	77.72	86.17	2.83	0.4661	0.5168	0.017	51.7	32 564	12 461	
20 500	-1 500c	77.68	83.86	1.95	0.4751	0.5129	0.0119	49.6	33 565	12 463	
22 510	-1 510c	77.33	78.57	0.93	0.493	0.5009	0.0059	44.8	33 567	13 466	
24 520	-1 520c	76.34	72.29	0.42	0.5121	0.485	0.0028	39.4	34 570	13 468	Ym
26 530	-1 530c	74.35	64.98	0.16	0.5329	0.4658	0.0011	33.3	34 574	14 471	
28 540	-1 540c	71.07	56.66	0.04	0.5561	0.4434	0.0003	26.8	35 578	14 473	
28 545	-1 544c	71.07	56.66	0.04	0.5561	0.4434	0.0003	26.8	35 578	14 473	
29 550	-1 549c	68.88	52.27	0.01	0.5684	0.4314	0.0001	23.5	36 580	14 474	
31 555	-1 555c	63.34	43.32	0.0	0.5938	0.4061	0.0	17.0	37 585	15 475	
31 560	9 447	74.86	45.07	57.94	0.4208	0.2533	0.3257	329.3	-1 487c	17 487	
31 556	1 405	64.23	44.11	1.6	0.5841	0.4012	0.0145	16.7	37 586	15 475	Rm
31 558	6 435	68.25	43.15	26.54	0.4947	0.3128	0.1924	358.0	44 623	16 480	
32 560	9 450	72.86	42.46	57.14	0.4224	0.2462	0.3313	327.0	-1 487c	17 487	
32 563	12 460	75.75	41.67	85.63	0.373	0.2052	0.4217	298.8	-1 504c	20 504	
33 566	12 465	73.44	39.0	85.63	0.3707	0.1969	0.4323	296.3	-1 507c	21 507	
34 572	13 470	70.2	35.31	93.18	0.3533	0.1777	0.4689	286.9	-1 520c	24 520	
36 582	14 475	62.19	28.74	99.37	0.3267	0.151	0.5221	275.6	-1 533c	26 533	Mm
44 622	16 480	31.56	13.34	107.65	0.2068	0.0874	0.7056	245.9	0 403	31 556	
-1 485c	17 485	19.48	9.88	110.21	0.1395	0.0708	0.7896	235.4	11 456	32 562	
-1 490c	18 490	19.53	11.73	112.03	0.1363	0.0819	0.7817	233.7	11 459	32 563	min
-1 495c	19 495	19.55	13.82	113.3	0.1333	0.0942	0.7724	231.7	12 461	32 564	
-1 500c	20 500	19.6	16.13	114.18	0.1307	0.1075	0.7616	229.6	12 463	33 565	
-1 510c	22 510	19.95	21.42	115.21	0.1274	0.1368	0.7357	224.8	13 466	33 567	
-1 520c	24 520	20.94	27.7	115.72	0.1274	0.1685	0.704	219.4	13 468	34 570	Bm
-1 530c	26 530	22.93	35.01	115.98	0.1318	0.2013	0.6668	213.4	14 471	34 574	
-1 540c	28 540	26.21	43.33	116.1	0.1412	0.2333	0.6253	206.8	14 473	35 578	
-1 544c	28 545	26.21	43.33	116.1	0.1412	0.2333	0.6253	206.8	14 473	35 578	
-1 549c	29 550	28.39	47.72	116.13	0.1477	0.2482	0.604	203.5	14 474	36 580	
-1 555c	31 555	33.93	56.67	116.14	0.1641	0.2741	0.5617	197.0	15 475	37 585	
9 447	31 560	22.41	54.92	58.2	0.1653	0.4052	0.4294	149.2	17 487	-1 487c	
380	770	97.28	99.99	116.14	0.3103	0.319	0.3705	0.0			

TUB-test chart CE30; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant C00; diagram for illuminant C00, $Y_{w,10}=100$

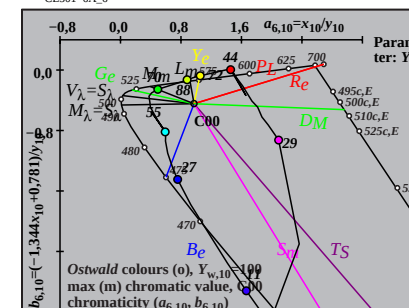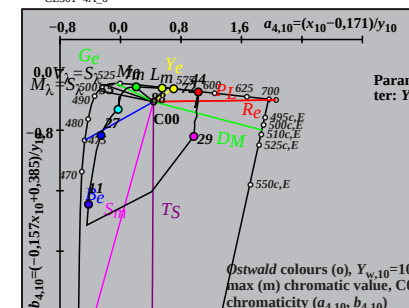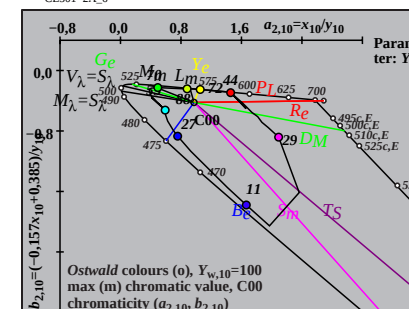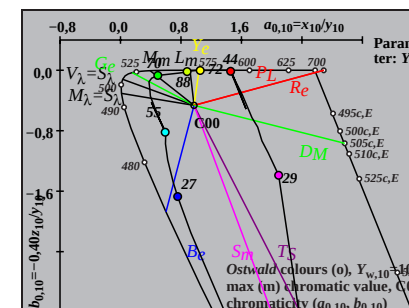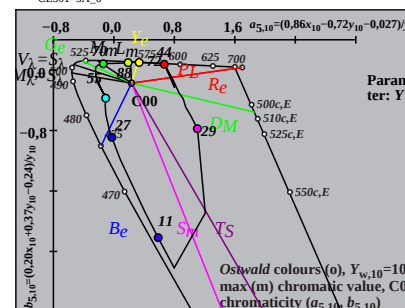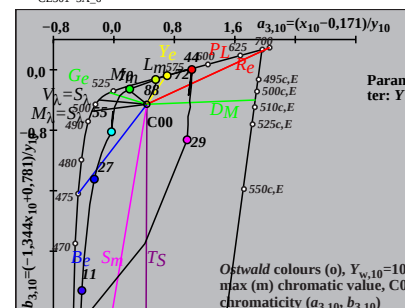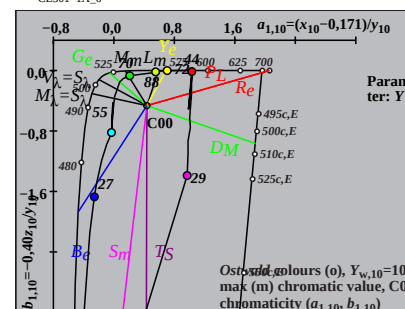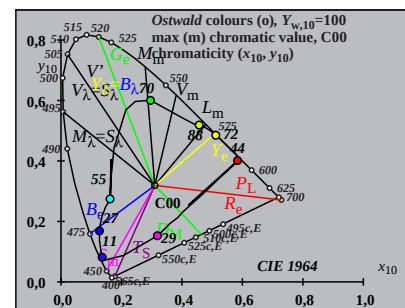

[illegible]

Ostwald optimal colours (o) of maximum (m) $C_{AB,10}$ for Q00, $Y_{w,10}=100$, $Y_m=520_770$

i_1, λ_1	i_2, λ_2	X_{10}	Y_{10}	Z_{10}	x_{10}	y_{10}	z_{10}	$h_{xy,10}$	i_d, λ_d	i_c, λ_c	Code
1 405	31 556	33.44	56.3	115.58	0.1628	0.2742	0.5628	196.1	15 475	37 587	Cm
7 435	31 558	26.56	56.83	76.55	0.166	0.3553	0.4786	164.7	16 482	-1 482c	
10 450	32 560	22.08	57.26	46.17	0.1759	0.4562	0.3678	133.5	18 493	-1 493c	
12 460	32 563	21.16	58.56	28.78	0.195	0.5396	0.2652	117.0	21 506	-1 506c	
13 465	33 566	22.3	60.33	21.67	0.2138	0.5783	0.2077	109.9	23 515	-1 515c	
13 470	34 572	26.68	64.84	21.67	0.2357	0.5727	0.1914	105.9	24 520	-1 520c	
15 475	36 583	34.45	70.42	11.51	0.296	0.605	0.0989	92.5	27 536	-1 536c	Gm
15 480	45 629	69.24	89.85	11.51	0.4058	0.5266	0.0674	65.2	31 556	2 413	
17 485	-1 485c	77.47	90.54	5.9	0.4454	0.5206	0.0339	56.2	32 561	11 455	
17 490	-1 489c	77.47	90.54	5.9	0.4454	0.5206	0.0339	56.2	32 561	11 455	max
18 495	-1 494c	77.42	88.8	4.19	0.4543	0.521	0.0246	54.6	32 562	11 458	
19 500	-1 499c	77.4	86.78	2.96	0.463	0.5191	0.0177	52.7	32 563	12 460	
21 510	-1 509c	77.23	81.81	1.45	0.4812	0.5097	0.009	48.2	33 566	12 464	
24 520	-1 520c	75.89	71.94	0.44	0.5118	0.4851	0.0029	39.7	34 570	13 468	Ym
26 530	-1 530c	73.77	64.11	0.16	0.5343	0.4644	0.0011	33.2	34 574	14 471	
27 540	-1 539c	72.26	59.95	0.08	0.5462	0.4531	0.0006	29.9	35 576	14 472	
29 545	-1 545c	68.32	51.41	0.01	0.5705	0.4293	0.0001	23.3	36 581	14 474	
30 550	-1 550c	65.85	47.12	0.0	0.5828	0.4171	0.0	20.1	36 583	15 475	
30 555	-1 554c	65.85	47.12	0.0	0.5828	0.4171	0.0	20.1	36 583	15 475	
31 560	9 447	75.63	44.71	62.92	0.4126	0.2439	0.3433	325.1	-1 488c	17 488	
31 556	1 405	64.2	43.69	2.84	0.5797	0.3945	0.0256	16.0	37 587	15 475	Rm
31 558	7 435	71.08	43.16	41.86	0.4553	0.2764	0.2681	344.7	-1 482c	16 482	
32 560	10 450	75.56	42.73	72.24	0.3965	0.2242	0.3791	313.6	-1 493c	18 493	
32 563	12 460	76.48	41.43	89.63	0.3685	0.1996	0.4318	297.0	-1 506c	21 506	
33 566	13 465	75.34	39.66	96.74	0.3557	0.1873	0.4568	289.9	-1 515c	23 515	
34 572	13 470	70.96	35.15	96.74	0.3497	0.1732	0.4769	285.9	-1 520c	24 520	
36 583	15 475	63.19	29.57	106.9	0.3164	0.1481	0.5354	272.5	-1 536c	27 536	Mm
45 629	15 480	28.4	10.14	106.9	0.1952	0.0697	0.7349	245.2	2 413	31 556	
-1 485c	17 485	20.17	9.45	112.51	0.1419	0.0664	0.7915	236.2	11 455	32 561	
-1 489c	17 490	20.17	9.45	112.51	0.1419	0.0664	0.7915	236.2	11 455	32 561	min
-1 494c	18 495	20.22	11.19	114.22	0.1388	0.0768	0.7842	234.6	11 458	32 562	
-1 499c	19 500	20.24	13.21	115.45	0.1359	0.0887	0.7752	232.7	12 460	32 563	
-1 509c	21 510	20.41	18.18	116.97	0.1312	0.1168	0.7518	228.3	12 464	33 566	
-1 520c	24 520	21.75	28.05	117.98	0.1296	0.1672	0.7031	219.7	13 468	34 570	Bm
-1 530c	26 530	23.87	35.88	118.26	0.1341	0.2015	0.6643	213.3	14 471	34 574	
-1 539c	27 540	25.38	40.04	118.33	0.1381	0.2179	0.6439	209.9	14 472	35 576	
-1 545c	29 545	29.32	48.58	118.41	0.1493	0.2474	0.6031	203.3	14 474	36 581	
-1 550c	30 550	31.79	52.87	118.42	0.1565	0.2603	0.5831	200.1	15 475	36 583	
-1 554c	30 555	31.79	52.87	118.42	0.1565	0.2603	0.5831	200.1	15 475	36 583	
9 447	31 560	22.01	55.28	55.49	0.1657	0.4162	0.4179	145.0	17 488	-1 488c	
380	770	97.65	100.0	118.42	0.3089	0.3163	0.3746	0.0			

TUB-test chart CE30; CIE (x_{10}, y_{10}) and chromaticities ($a_{i,10}, b_{i,10}$) input: w/rgb/cmyk -> rgb
Ostwald optimal colours for illuminant Q00; diagram for illuminant Q00, $Y_{w,10}=100$

