





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

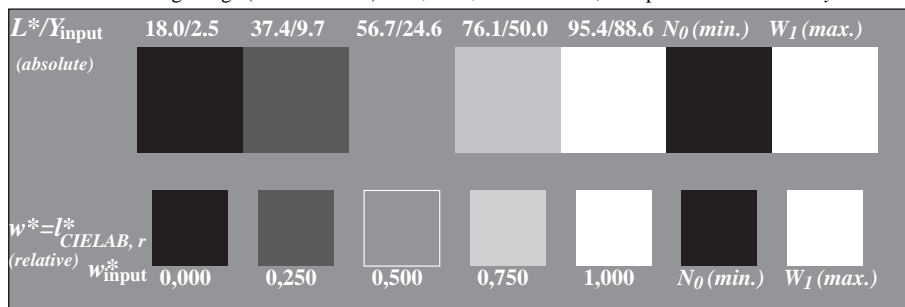

Picture C2: 5 visual equidistant L*-grey steps + N0 + W1; PS operator: 000n* setcmykcolor



Picture C3: 16 visual equidistant L*-grey steps; PS operator: nnn0* setcmykcolor; use file www.bam.de/FE88/10L/L88E0iNA.PS or [L88E0iNP.PS](http://www.bam.de/L88E0iNP.PS) (i=0,7) for PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and input: 000n*lin 1.0 exp setcmykcolor
DIS ISO/IEC 19839-X; output: 000n*lin 1.0 exp setcmykcolor

background step 0		1	ring step	0-1
Hex code		Hex code		
7		8		7-8
E		F		E-F
2		0		2-0
8		6		8-6
F		D		F-D


Landolt-rings W-N

code: background-ring

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

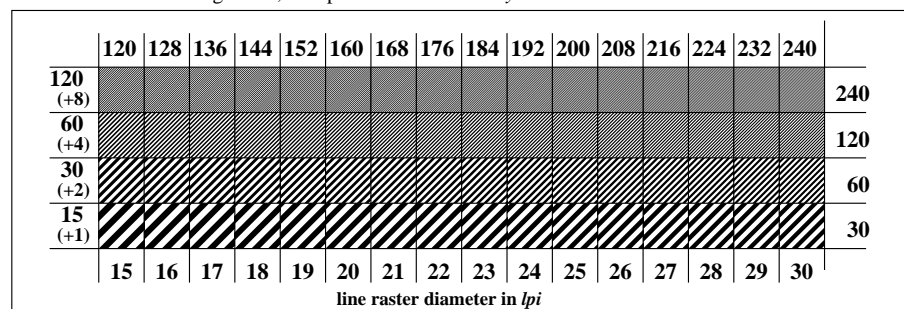

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

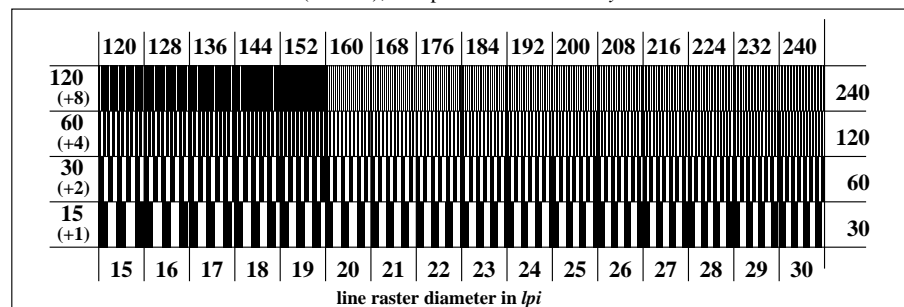

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor