


See for similar files: <http://www.ps.bam.de/FE87/>
Information and Order: <http://www.ps.bam.de> Version 2.0, io=1,1

BAM registration: 20031201-FE87/10F/F87E00NP.PS/.PDF BAM material: code=rha4ta
Bottom part of page: application for monitors (Yr=2.5) and printers

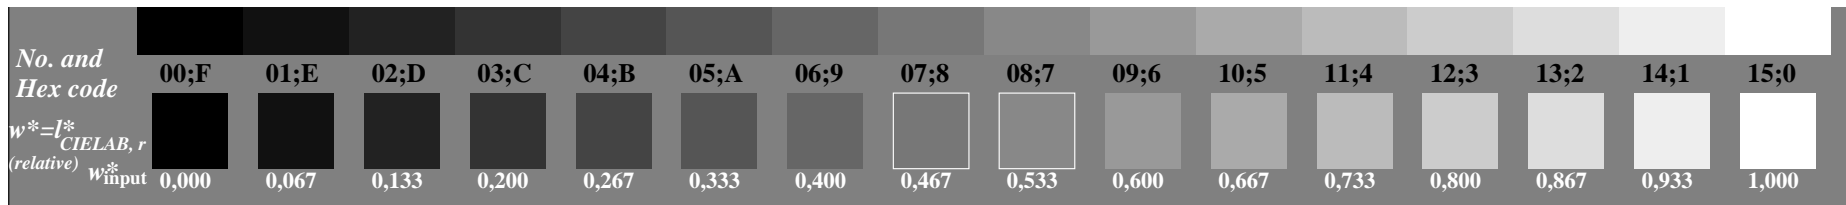

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $w^*lin 1.0 exp setgray$; use file www.bam.de/EE87/10F/F87E00NA.PS or [/F87E00NP.PS](http://www.bam.de/F87E00NP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and input: $w^*lin 1.0 exp setgray$
DIS ISO/IEC 19839-X; output: $w^*lin 1.0 exp setgray$