

www.ps.bam.de/FE88/F88E00F1.PS/.TXT; linearized output


F: Output Linearization (OL) data FE88/F88E00F1.DAT in File (F)

See for similar files: <http://www.ps.bam.de/FE88/>  
Information and Order: <http://www.ps.bam.de>

Version 2.0, io=2.0; iORS; oORS; CIE LAB

BAM registration: 20031201-FE88/F88E00F1.PS/.TXT  
Bottom part of page: application for monitors (YI=2.5) and printers

BAM material: code=th4ta

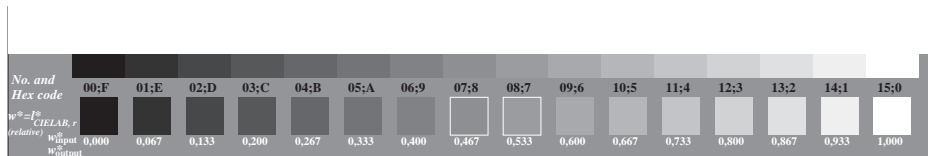

Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $nnn0^* setcmykcolor$ ; use file [www.bam.de/IE88/10F/F88E00FA.PS](http://www.bam.de/IE88/10F/F88E00FA.PS) or [/F88E00FP.PS](http://www.bam.de/F88E00FP.PS).PDF for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and  
DIS ISO/IEC 19839-X;

input:  $nnn0^*lin 1.0 exp setcmykcolor$   
output:  $cmy0^*/000n^* setcmykcolor$