

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
N	1	28.9	4.3	1.8	23	28.9	4.3	1.8	23
	2	30.1	0.2	3.5	87	31.1	-2.0	3.0	125
	3	31.2	-3.9	5.2	127	32.5	-8.6	4.3	154
	4	32.4	-8.0	6.9	139	33.2	-15.0	6.1	158
	5	33.5	-12.1	8.7	145	33.8	-19.0	7.9	158
	6	34.7	-16.3	10.4	148	35.2	-24.7	9.9	158
	7	35.8	-20.4	12.1	149	36.1	-28.2	11.7	158
	8	37.0	-24.5	13.8	151	37.1	-32.0	14.1	156
	9	38.1	-28.7	15.5	152	38.1	-34.8	15.4	156
	10	39.3	-32.8	17.2	152	39.4	-38.8	16.8	157
	11	40.4	-36.9	18.9	153	40.7	-42.2	19.0	156
	12	41.6	-41.0	20.6	153	41.7	-45.4	19.8	156
	13	42.7	-45.2	22.4	154	42.5	-48.7	22.1	156
	14	43.9	-49.3	24.1	154	43.4	-51.7	22.1	157
	15	45.0	-53.4	25.8	154	44.6	-54.2	24.2	156
	16	46.2	-57.6	27.5	155	46.1	-58.2	27.0	155
L	17	47.3	-61.7	29.2	155	47.3	-61.7	29.2	155
N	18	28.9	4.3	1.8	23	28.9	4.3	1.8	23
	19	33.5	-12.1	8.7	145	33.8	-19.0	7.9	158
	20	38.1	-28.7	15.5	152	38.1	-34.8	15.4	156
	21	42.7	-45.2	22.4	154	42.5	-48.7	22.1	156
L	22	47.3	-61.7	29.2	155	47.3	-61.7	29.2	155


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 47.32 - 28.93$
Regularity
 $g^* = 86.2$
Lightness gamut relative to offset
 $f^* = 23.8$
Black - Leaf green
rgb: N - L
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 4.5$
 $\Delta E^*_{CIELAB} = 4.5$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 3.3$
 $\Delta E^*_{CIELAB} = 3.3$
Mean colour reproduction index: $R^*_{ab,m} = 81$

YE320-3N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
N	1	29.0	3.9	1.6	22	29.0	3.9	1.6	22
	2	30.2	-0.3	3.5	96	31.3	-2.6	3.1	131
	3	31.4	-4.6	5.4	131	32.7	-9.3	4.7	153
	4	32.6	-8.8	7.3	141	33.5	-15.8	6.8	157
	5	33.8	-13.1	9.2	145	34.2	-20.0	8.8	156
	6	35.0	-17.4	11.1	148	35.6	-25.7	11.0	157
	7	36.2	-21.7	13.0	149	36.6	-29.4	13.0	156
	8	37.4	-25.9	14.9	150	37.6	-33.5	15.5	155
	9	38.6	-30.2	16.8	151	38.7	-36.3	17.0	155
	10	39.8	-34.5	18.6	152	40.0	-40.5	18.5	156
	11	41.0	-38.8	20.5	152	41.4	-44.1	20.9	155
	12	42.2	-43.0	22.4	153	42.4	-47.2	21.7	155
	13	43.4	-47.3	24.3	153	43.3	-50.8	24.2	155
	14	44.6	-51.6	26.2	153	44.2	-53.7	24.4	156
	15	45.8	-55.9	28.1	153	45.4	-56.5	26.6	155
	16	47.0	-60.1	30.0	154	46.9	-60.8	29.6	154
L	17	48.2	-64.4	31.9	154	48.2	-64.4	31.9	154
N	18	29.0	3.9	1.6	22	29.0	3.9	1.6	22
	19	33.8	-13.1	9.2	145	34.2	-20.0	8.8	156
	20	38.6	-30.2	16.8	151	38.7	-36.3	17.0	155
	21	43.4	-47.3	24.3	153	43.3	-50.8	24.2	155
L	22	48.2	-64.4	31.9	154	48.2	-64.4	31.9	154

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 48.19 - 28.95$
Regularity
 $g^* = 83.4$
Lightness gamut relative to offset
 $f^* = 24.9$
Black - Leaf green
cmy0: N - L
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 4.4$
 $\Delta E^*_{CIELAB} = 4.5$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 3.3$
 $\Delta E^*_{CIELAB} = 3.3$
Mean colour reproduction index: $R^*_{ab,m} = 81$

YE321-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

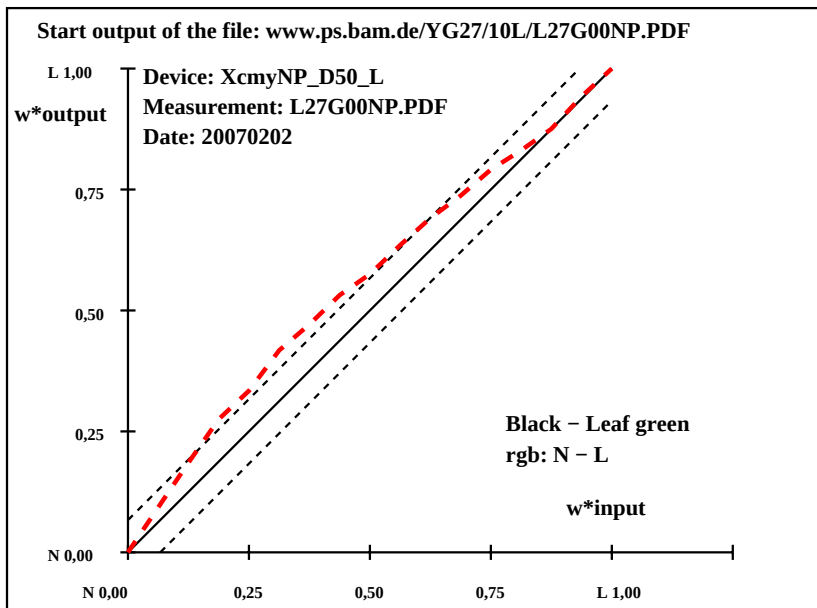

YE320-7N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

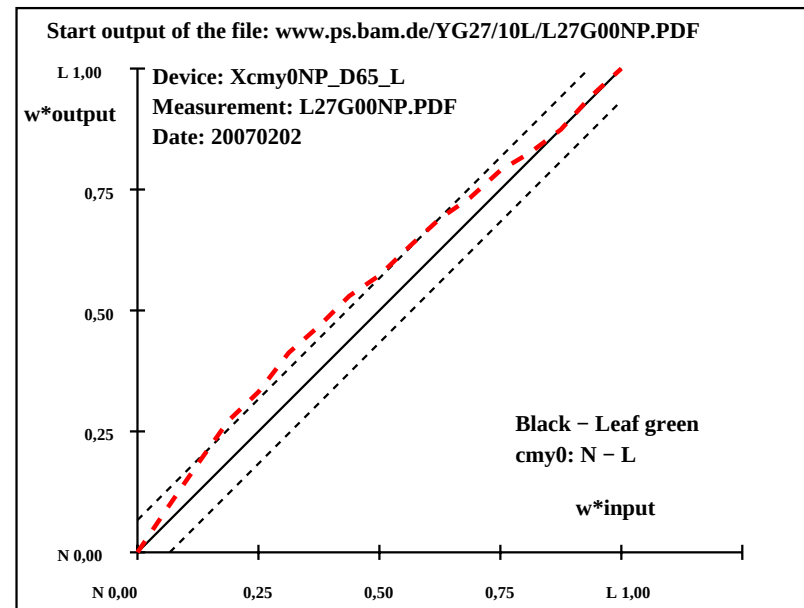

YE321-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202