

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

ol v^* Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

ol v^* Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

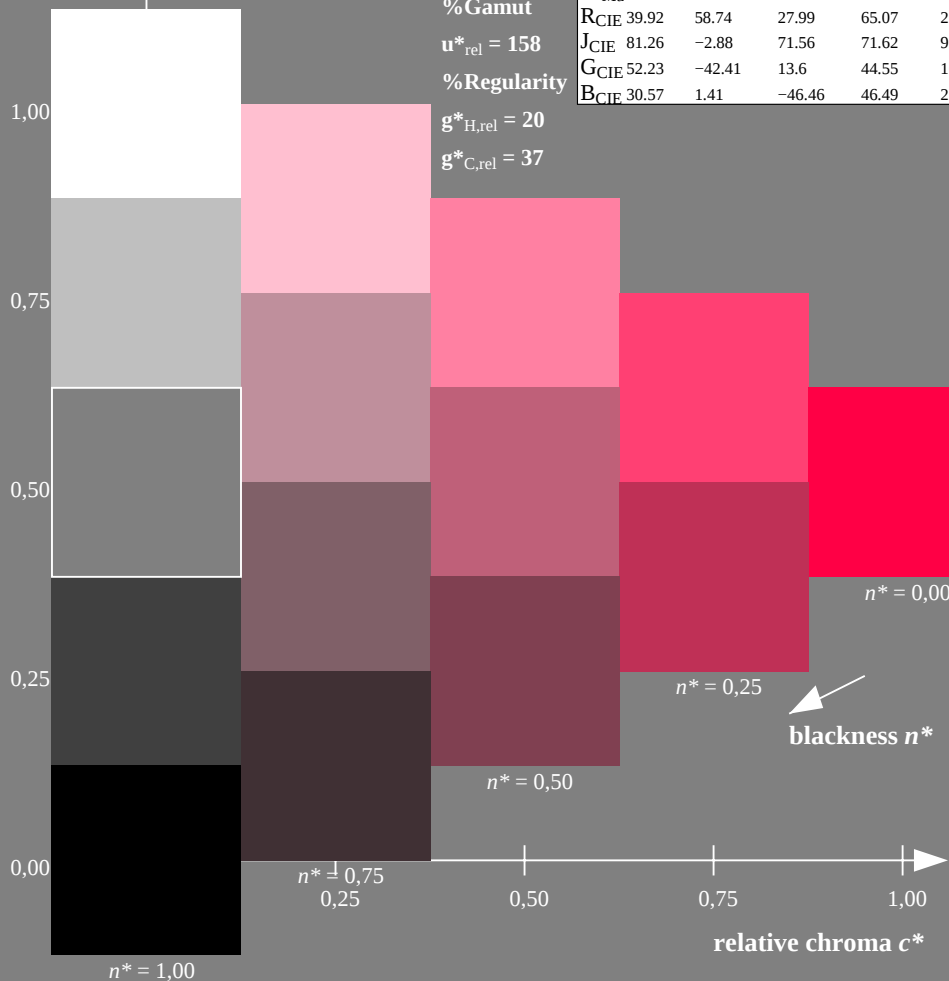

OE830-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

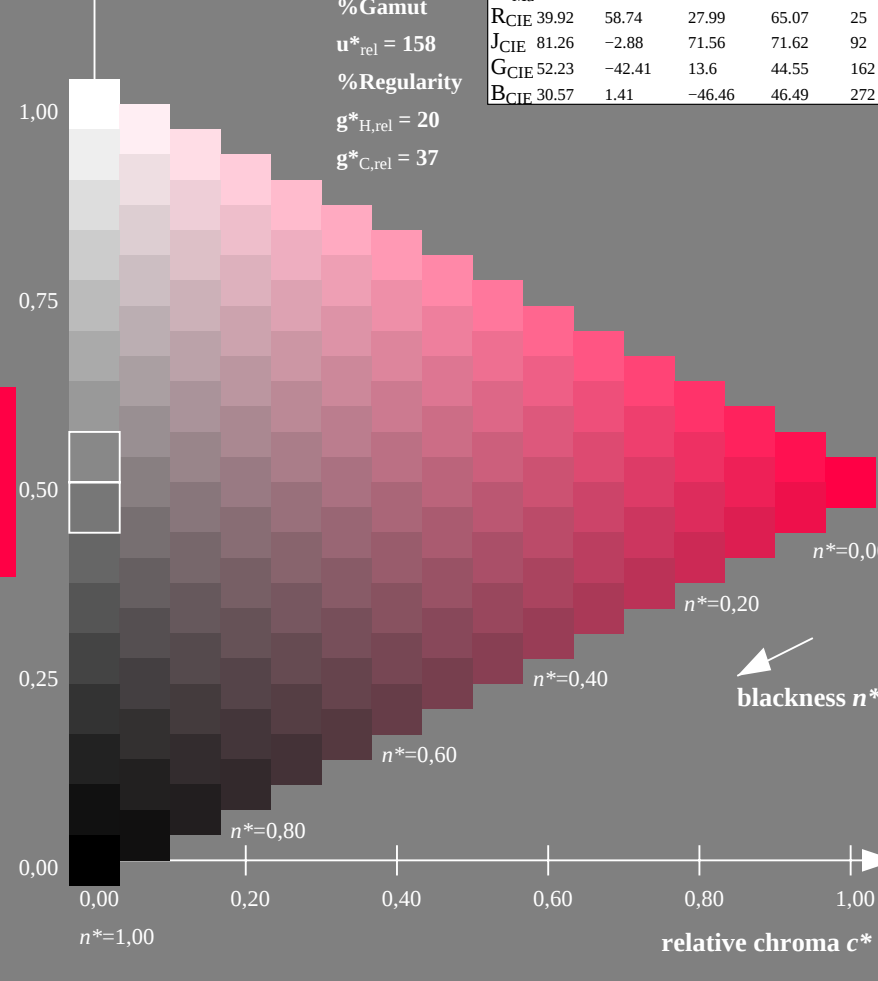

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DEH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 130-0: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

ol v^* Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

ol v^* Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

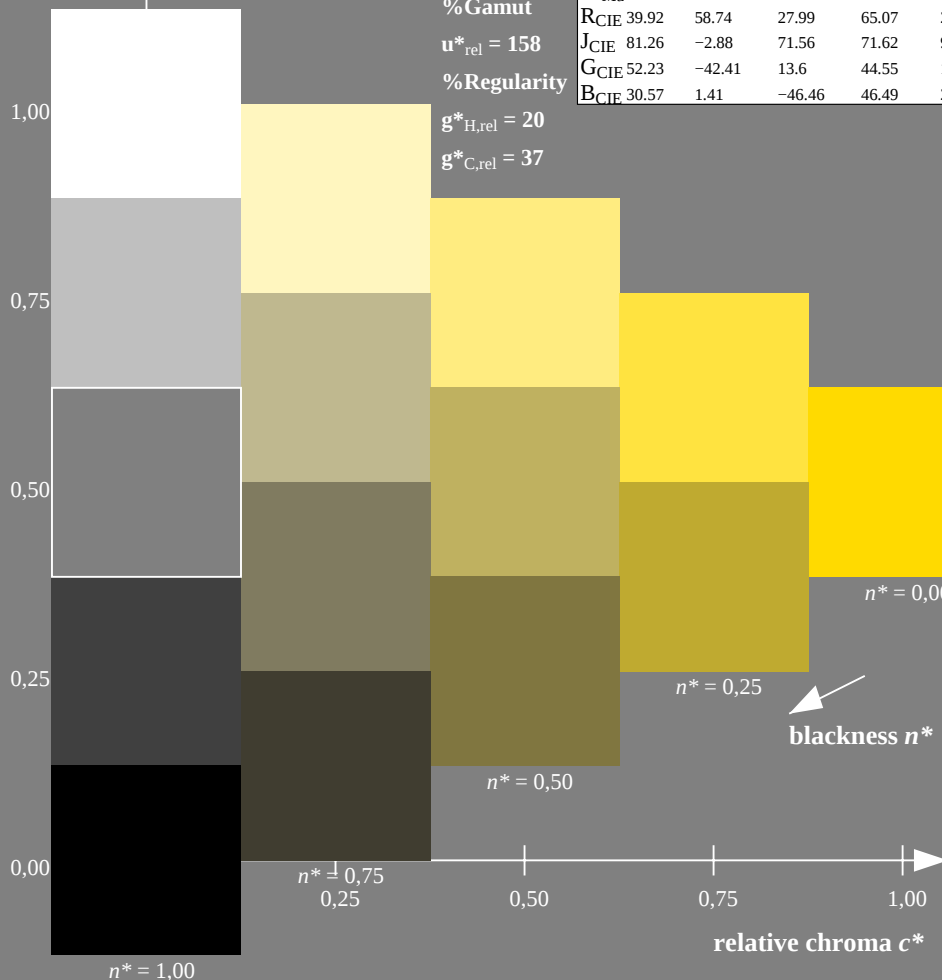

OE830-7N-130-1: 5 step scales for constant CIELAB hue 103/360 = 0.286 (left)

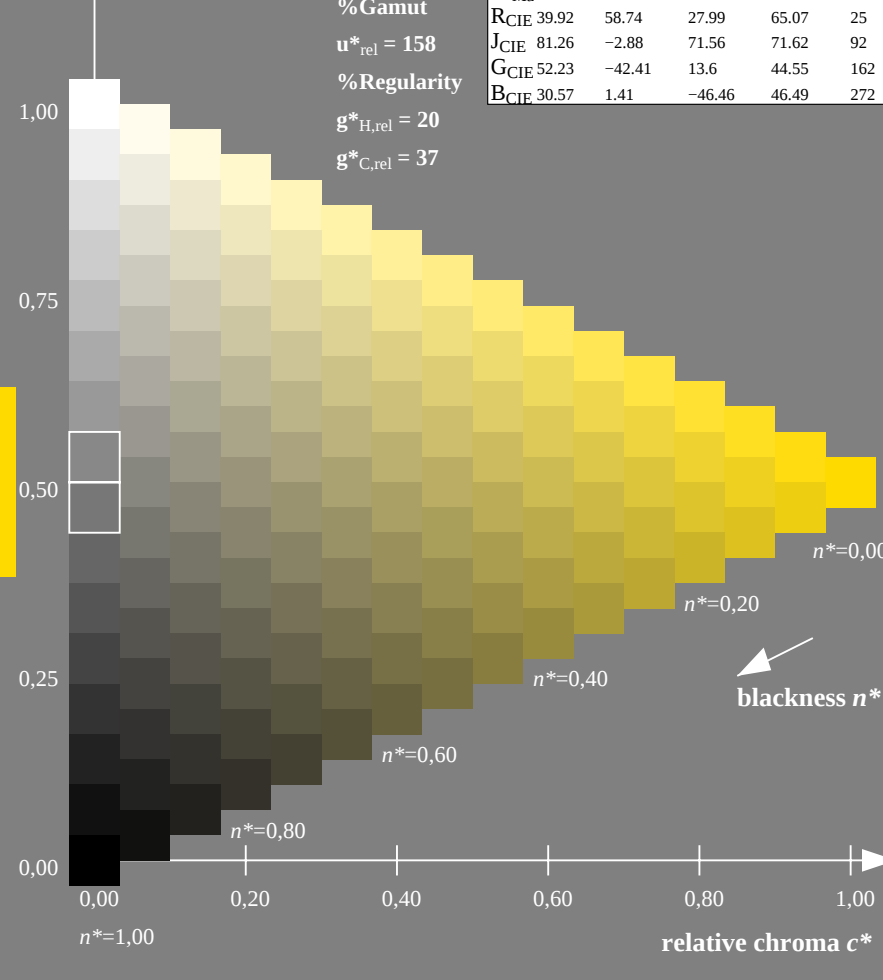

16 step scales for constant CIELAB hue 103/360 = 0.286 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DEH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) setcmyk
output 130-1: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

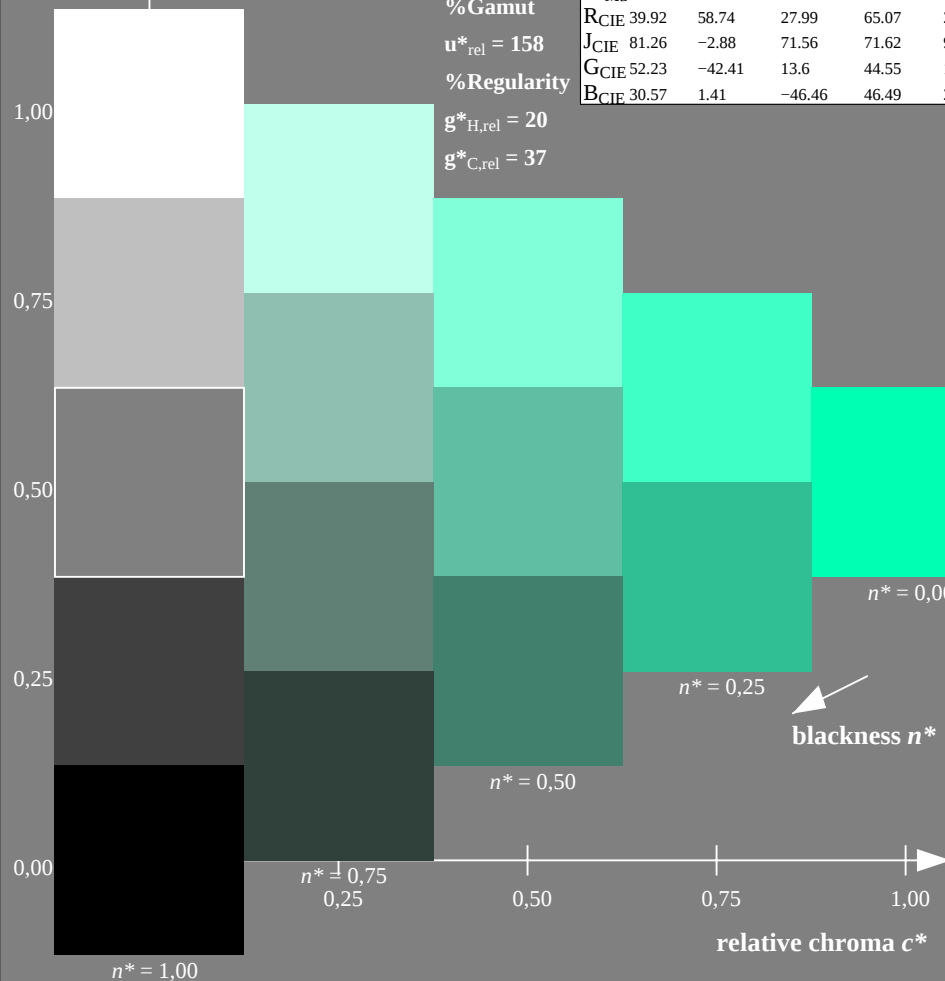

OE830-7N-130-2: 5 step scales for constant CIELAB hue 136/360 = 0.378 (left)

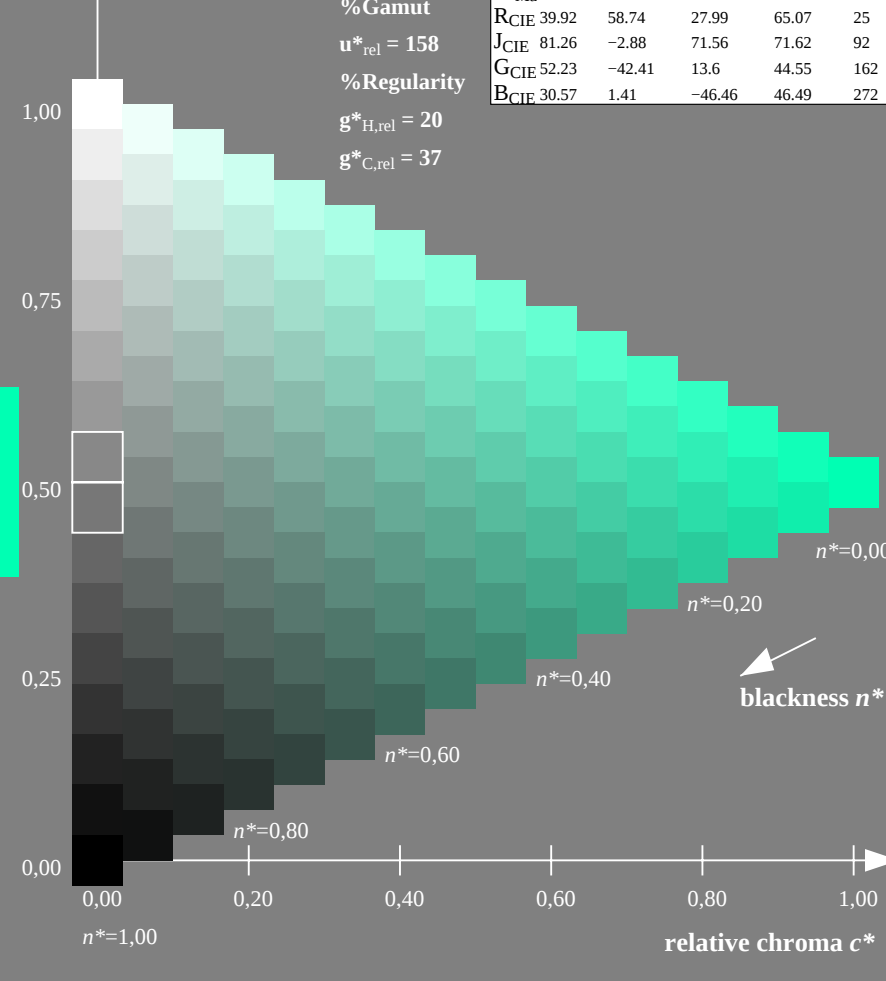

16 step scales for constant CIELAB hue 136/360 = 0.378 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DEH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 130-2: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

ol v^* Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

ol v^* Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

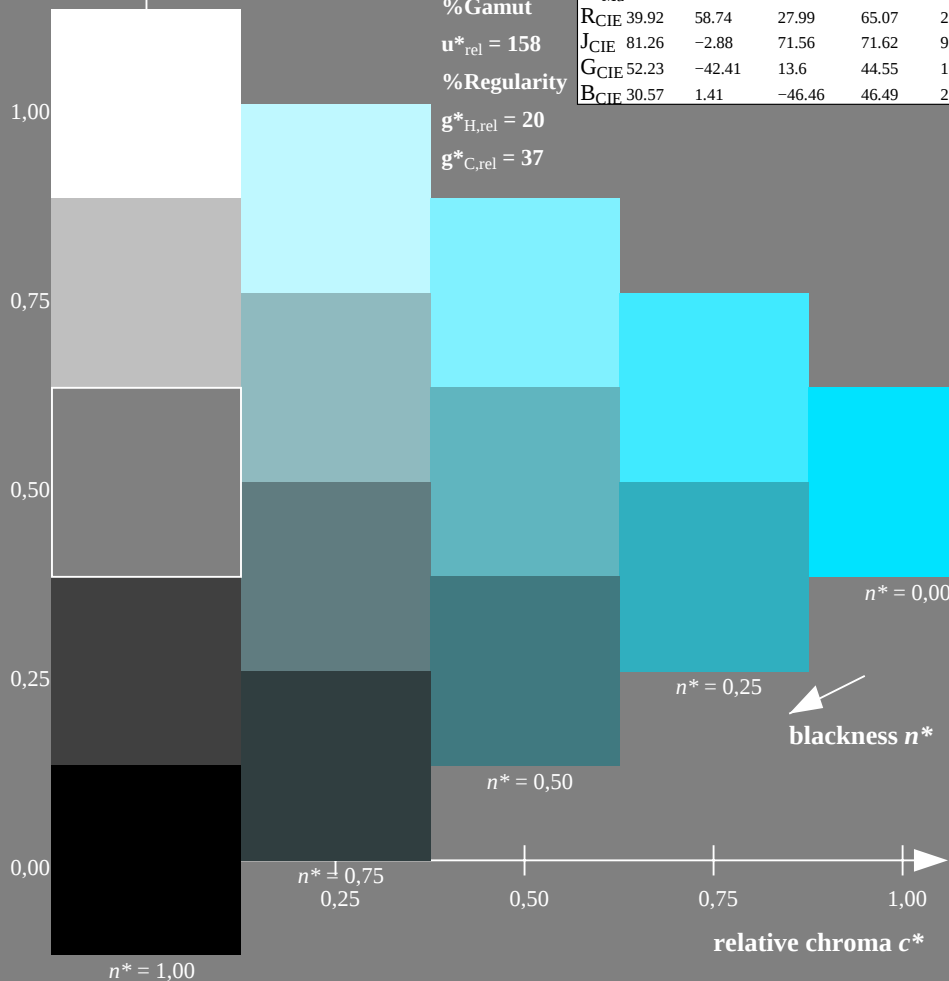

OE830-7N-130-3: 5 step scales for constant CIELAB hue 196/360 = 0.545 (left)

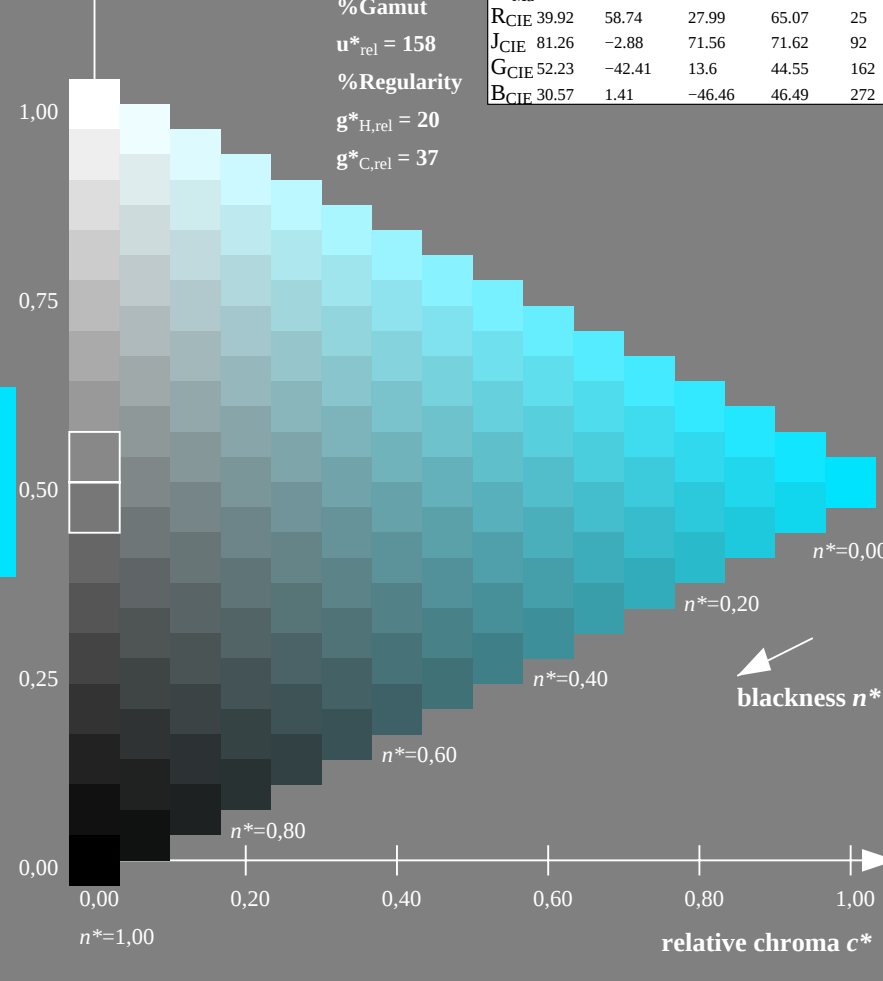

16 step scales for constant CIELAB hue 196/360 = 0.545 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DEH input: $cmy0$ ($\rightarrow cmy0^*_{de}$) setcmyk
Discrimination of 5 and 16 step colour scales output 130-3: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

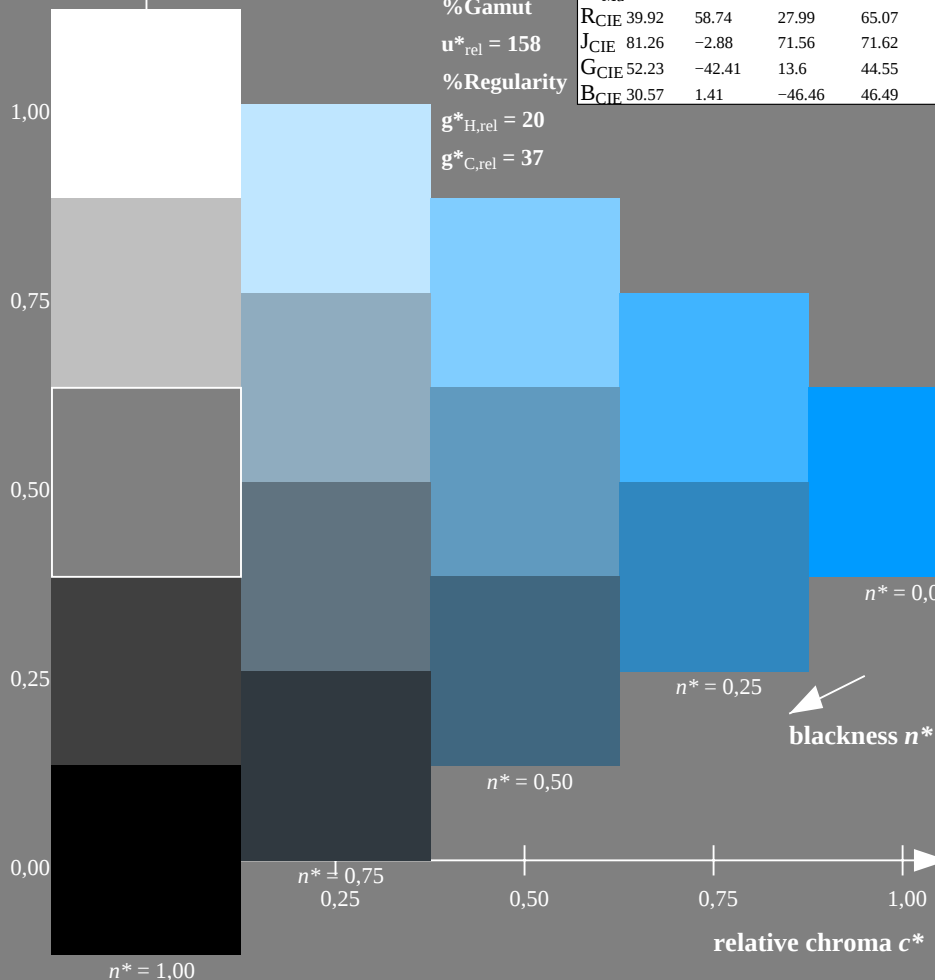

OE830-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

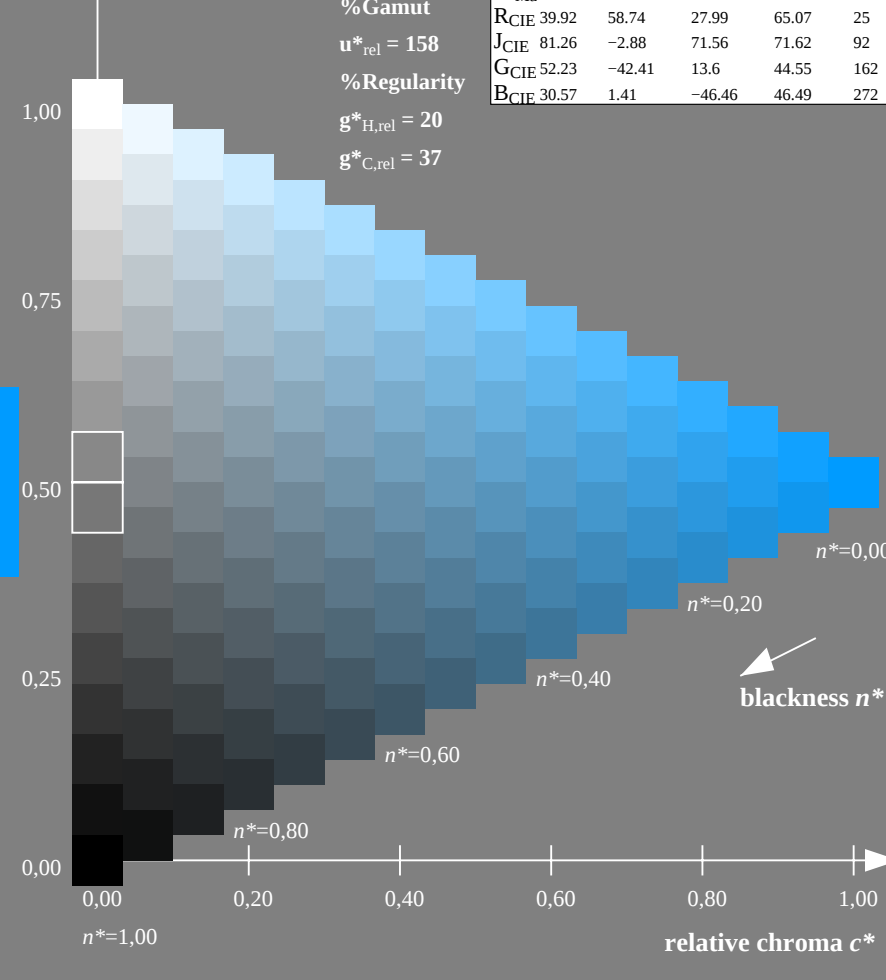

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DEH
Discrimination of 5 and 16 step colour scales
input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 130-4: $g_P=1.0$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut


$u^*_{rel} = 158$

%Regularity


$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

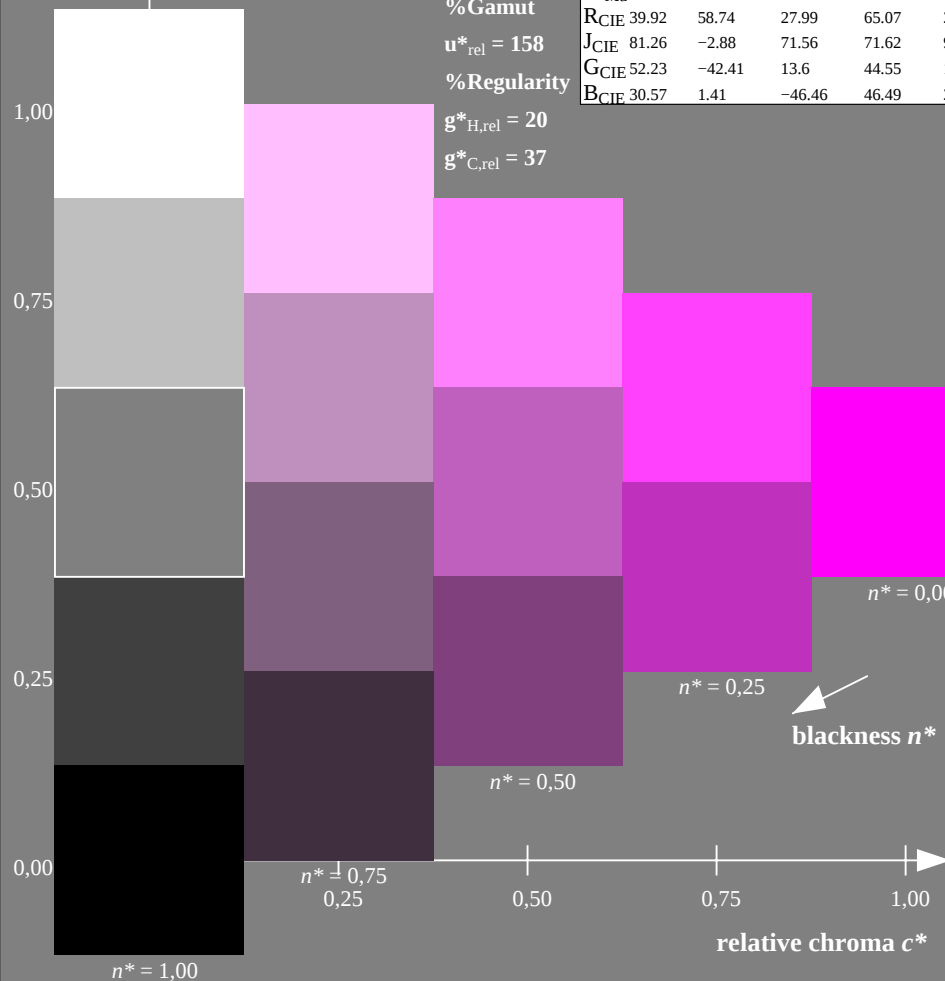

OE830-7N-130-5: 5 step scales for constant CIELAB hue 328/360 = 0.912 (left)

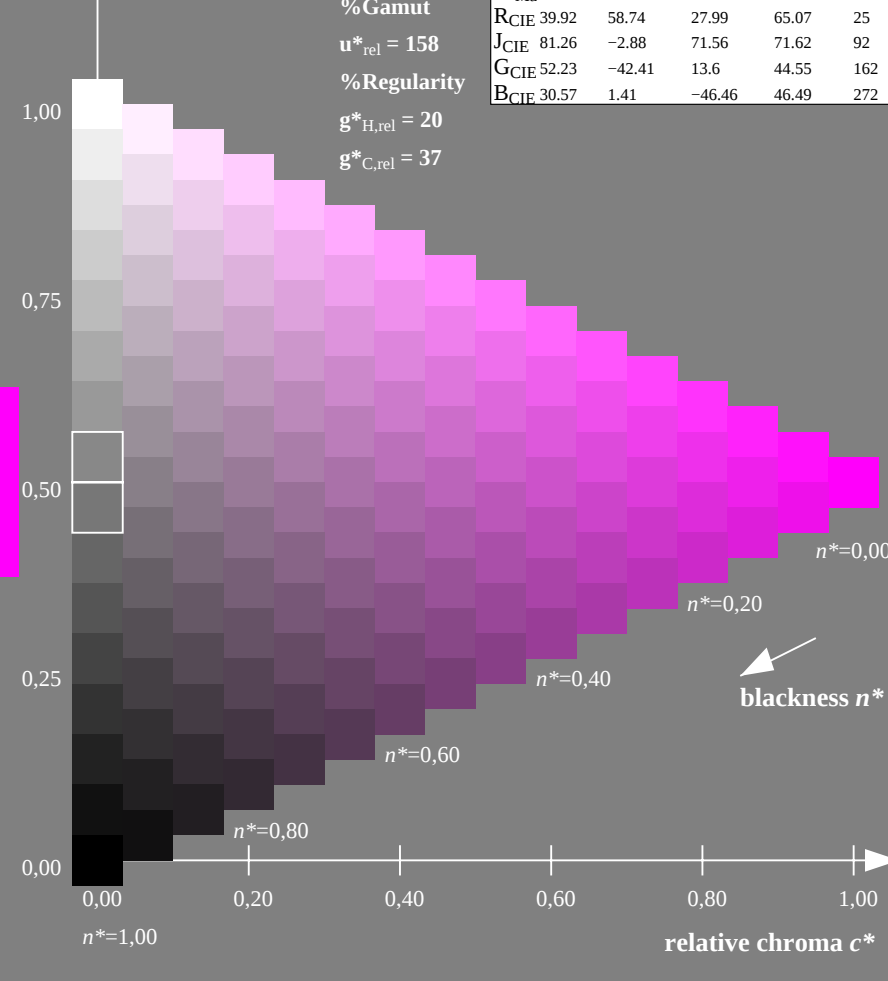

16 step scales for constant CIELAB hue 328/360 = 0.912 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DEH input: $cmy0$ ($\rightarrow cmy0^*_{de}$) setcmyk
Discrimination of 5 and 16 step colour scales output 130-5: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol v^* Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol v^* Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

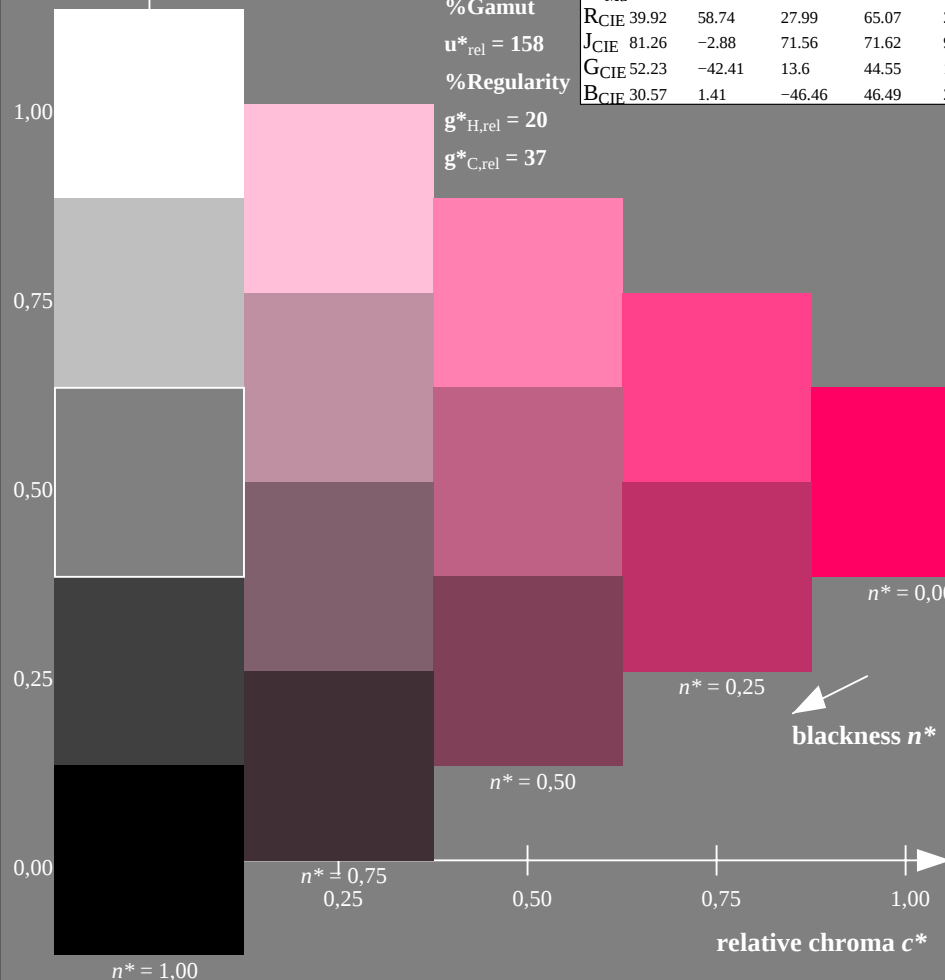

OE830-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

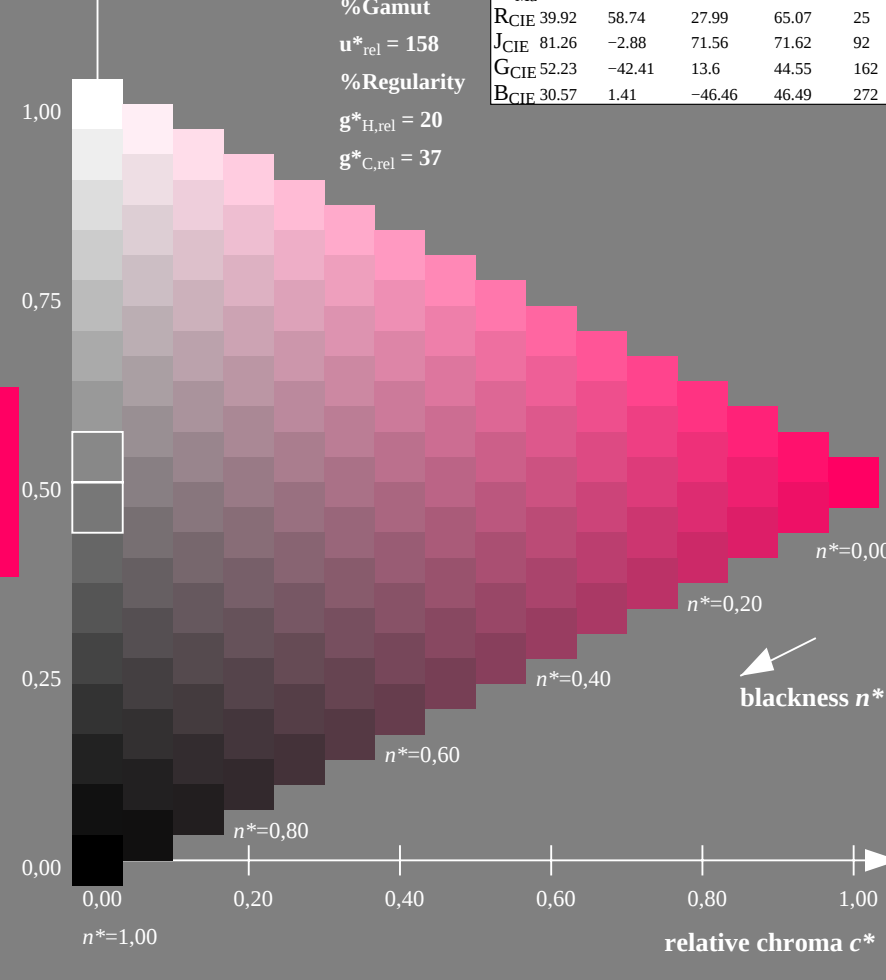

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DEEH input: $cmy0$ ($\rightarrow cmy0^*_{dee}$) setcmy
Discrimination of 5 and 16 step colour scales
output 130-6: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

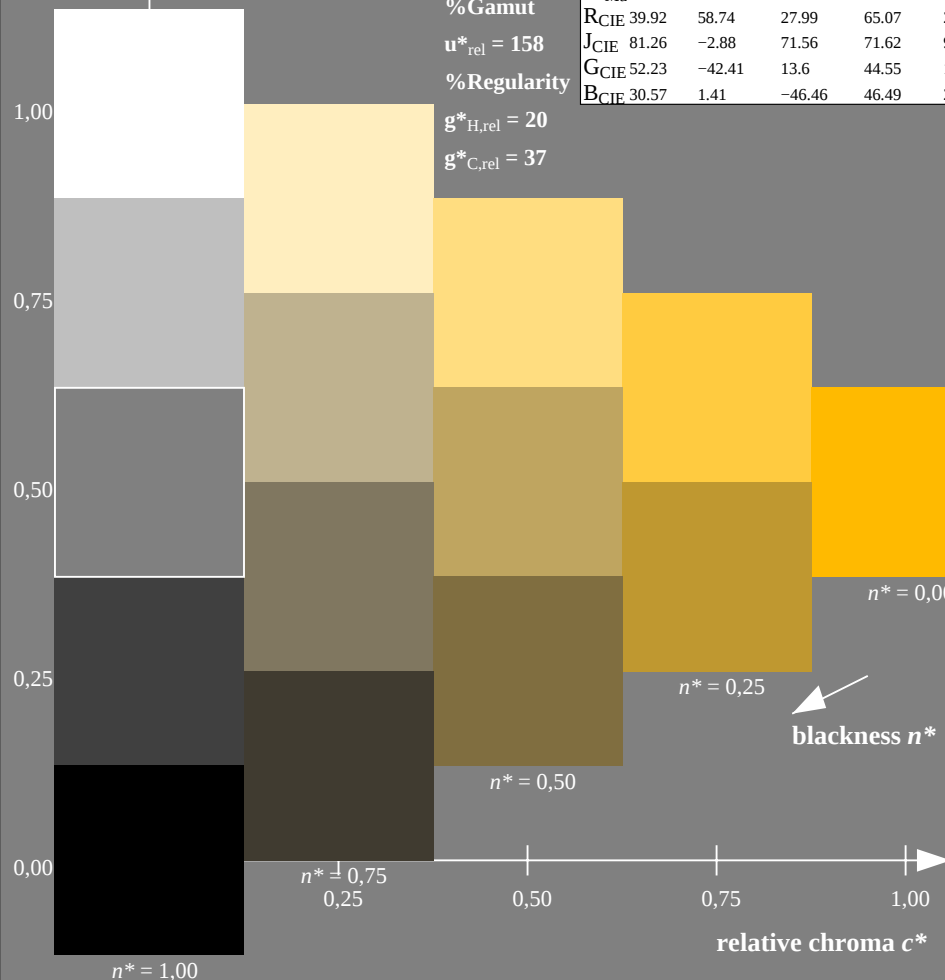

OE830-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

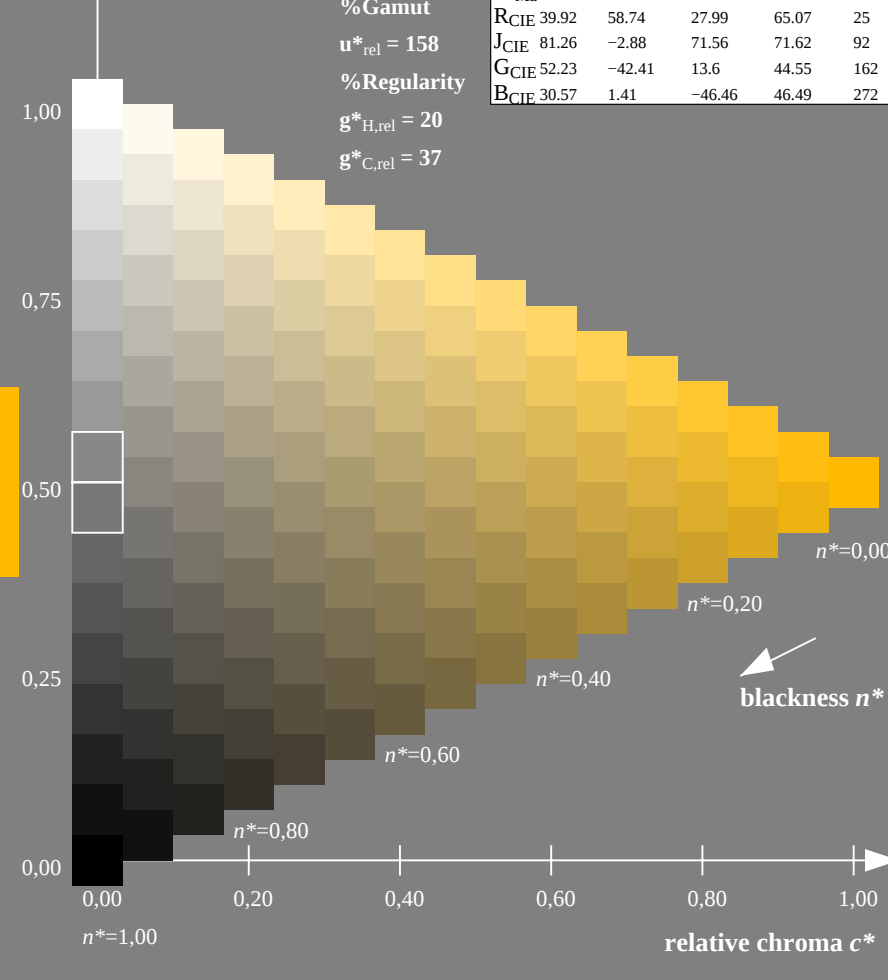

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DEEH input: $cmy0$ ($\rightarrow cmy0^*_{dee}$) setcmy
Discrimination of 5 and 16 step colour scales output 130-7: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

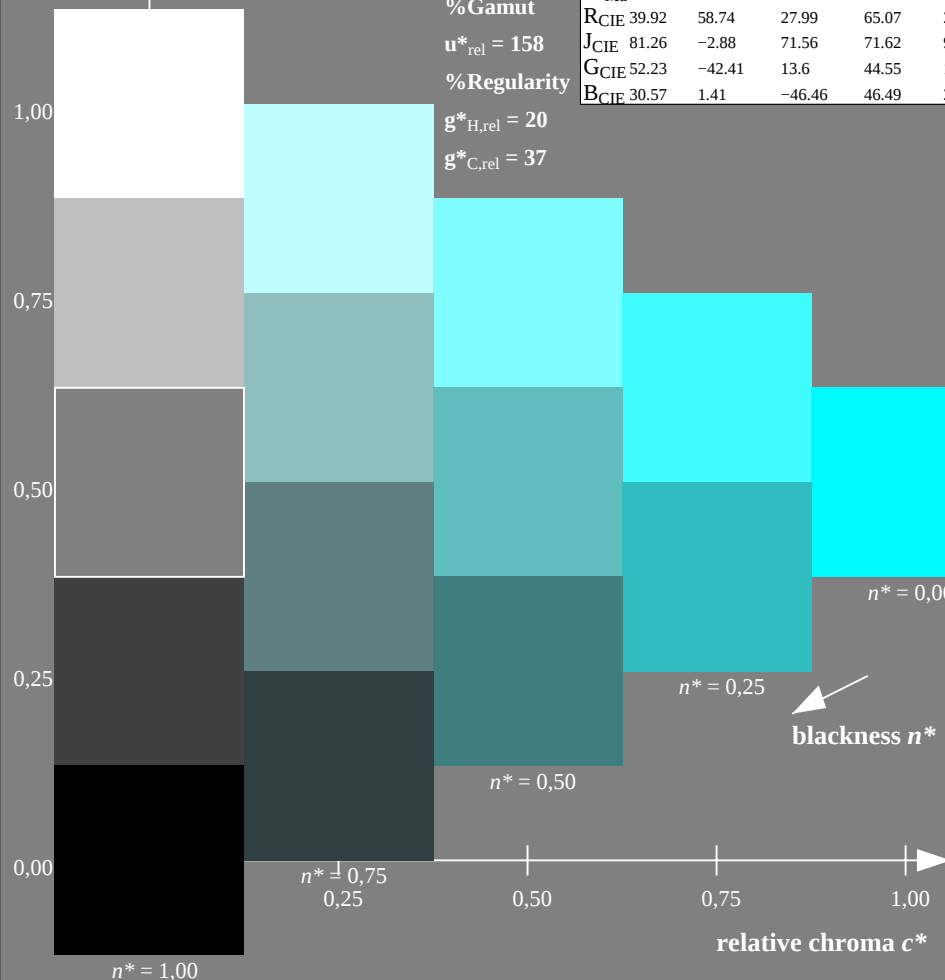

OE830-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

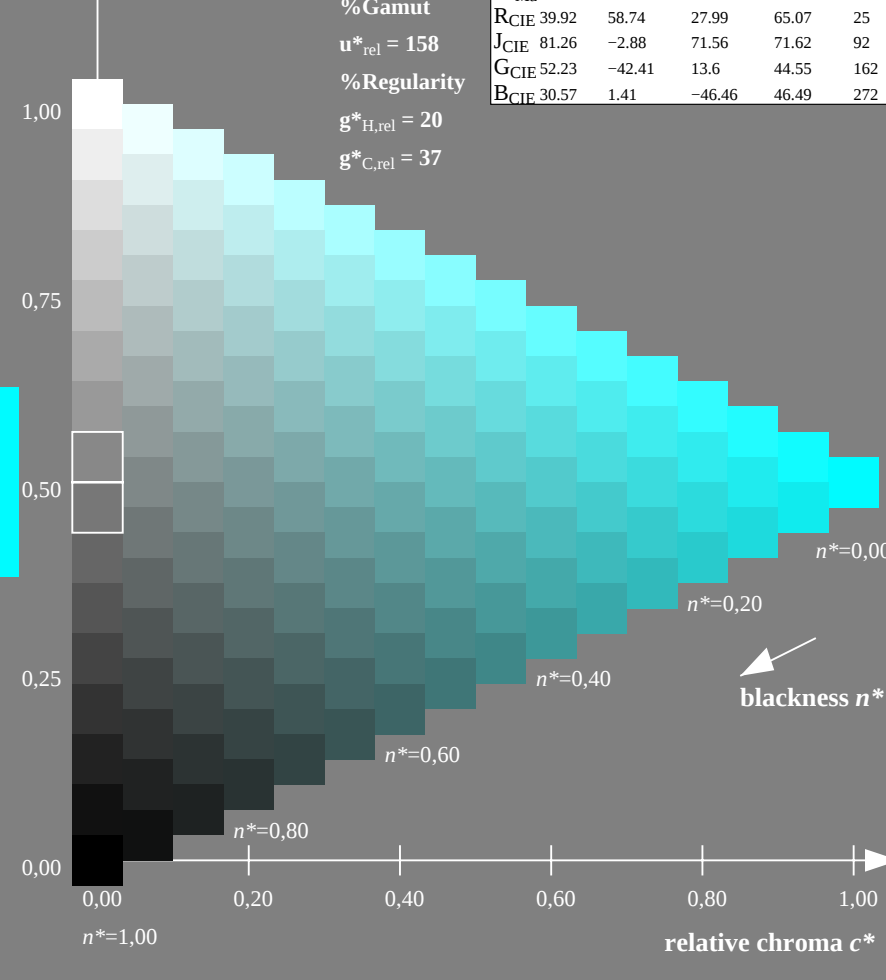

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE83: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DEEH input: $cm\dot{y}0$ ($\rightarrow cm\dot{y}0^*_{dee}$) $setcm\dot{y}$
Discrimination of 5 and 16 step colour scales
output 130-8: $g_P=1.0$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

olv*Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

olv*Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

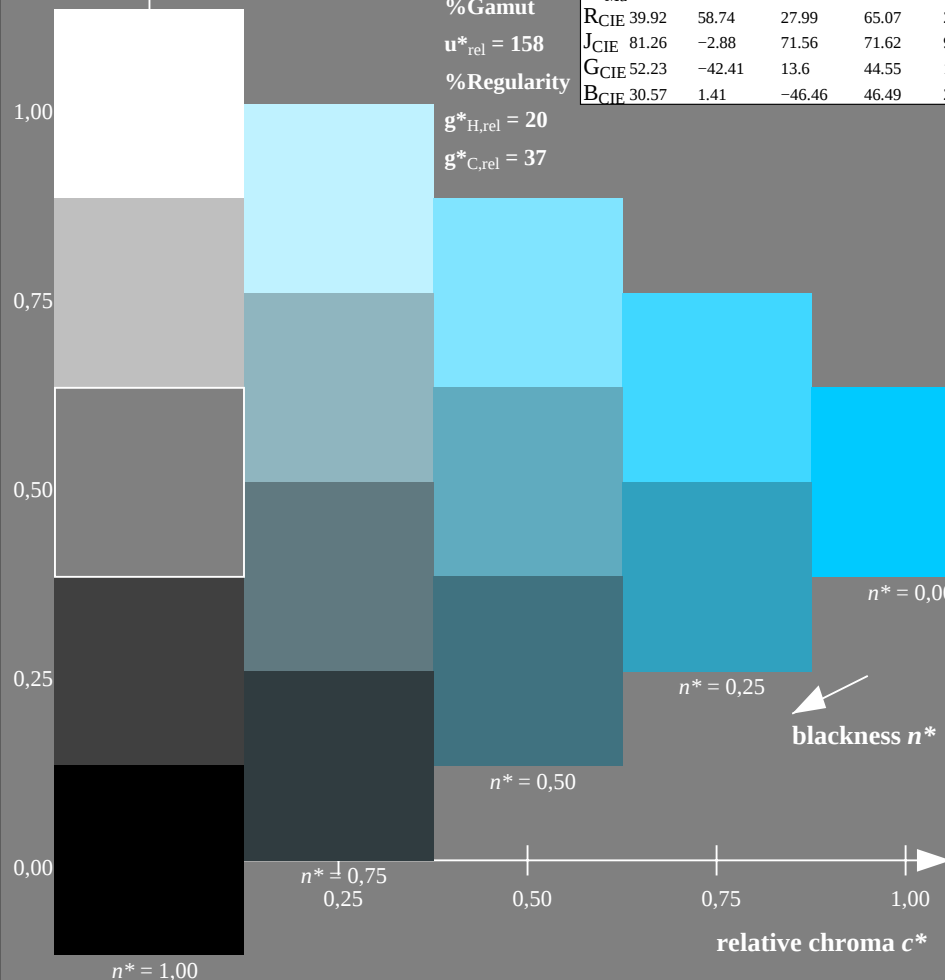

OE830-7N-130-9: 5 step scales for constant CIELAB hue 272/360 = 0.755 (left)

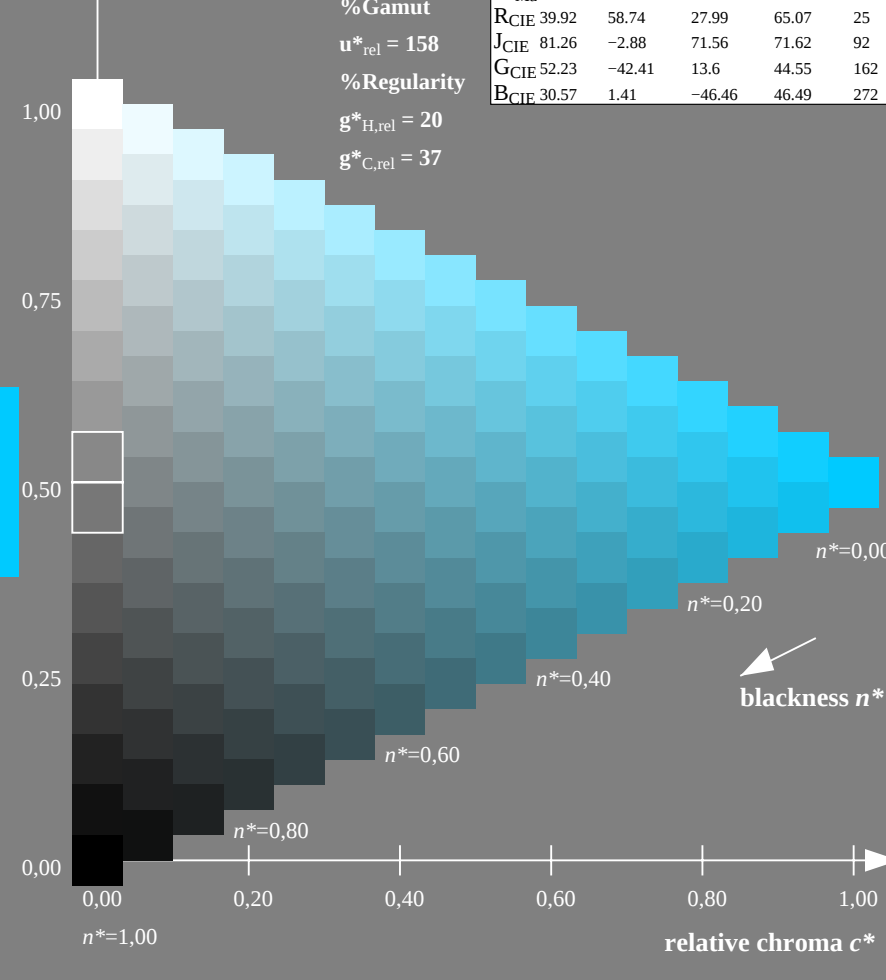


16 step scales for constant CIELAB hue 272/360 = 0.755 (right)


OE83: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DEEH input: $cmy0$ ($\rightarrow cmy0^*_{dee}$) setcmy
Discrimination of 5 and 16 step colour scales
output 130-9: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems


TUB material: code=th4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB




<http://130.149.60.45/~farbmetrik/OE83/OE83L0NA.TXT> /PS; linearized output, Page 11/12
 F: Output Linearization (OL) data OE83/OE83L0NA.TXT /PS in File (F)




TUB registration: 20110801-OE83/OE83L0NA.TXT /PS
 application for output of displays: monitor systems or data projector systems

TUB material: code=rh4ta



Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series

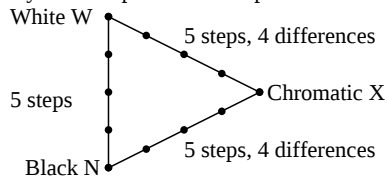

There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE830-3N-130-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE83/OE83L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE83/OE83L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE83L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For device output with PS-file OE83L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks:Special remarks, e. g. output of Landscape (L)

.....

Part 3

OE830-7N-130-10




OE83: Form A for test chart 2 according to DIN 33872-2; 1MR, DEH
 Discrimination of colour scales (Yes/No decision)
 Input: $cmy0$ ($\rightarrow cmy0^*_{de}$) setcmyk
 output 130-10: $g_P=1.0$; $g_N=1.0$



Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

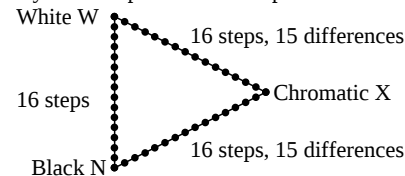

There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE831-3N-130-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
 or with test charts using colour points according to Ishihara
 or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE83/OE83F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE83/OE83F1P2.PS>

underline Yes/No

Picture A7-130-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE83/OE83F1P2.PDF>

picture A7-130-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE83/OE83F1P2.PS>

picture A7-130-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:


Part 4

OE831-7N-130-10

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref			l*out			LAB*out			LAB*out/c-ref			ΔE*
1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.0	0.07	6.36	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
3	12.72	0.0	0.0	0.13	12.72	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
4	19.08	0.0	0.0	0.2	19.08	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
5	25.44	0.0	0.0	0.27	25.44	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
6	31.8	0.0	0.0	0.33	31.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
7	38.16	0.0	0.0	0.4	38.16	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
8	44.52	0.0	0.0	0.47	44.52	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
9	50.89	0.0	0.0	0.53	50.89	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
10	57.25	0.0	0.0	0.6	57.25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
11	63.61	0.0	0.0	0.67	63.61	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
12	69.97	0.0	0.0	0.73	69.97	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
13	76.33	0.0	0.0	0.8	76.33	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
14	82.69	0.0	0.0	0.87	82.69	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
15	89.05	0.0	0.0	0.93	89.05	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
16	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
17	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.0	0.25	23.85	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
19	47.71	0.0	0.0	0.5	47.71	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
20	71.56	0.0	0.0	0.75	71.56	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
21	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
Mean lightness difference (16 steps)													ΔE* _{CIELAB} = 0.0
Mean lightness difference (5 steps)													ΔL* _{CIELAB} = 0.0
Mean colour reproduction index:													R* _{ab,m} = 100

OE830-3N-130-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

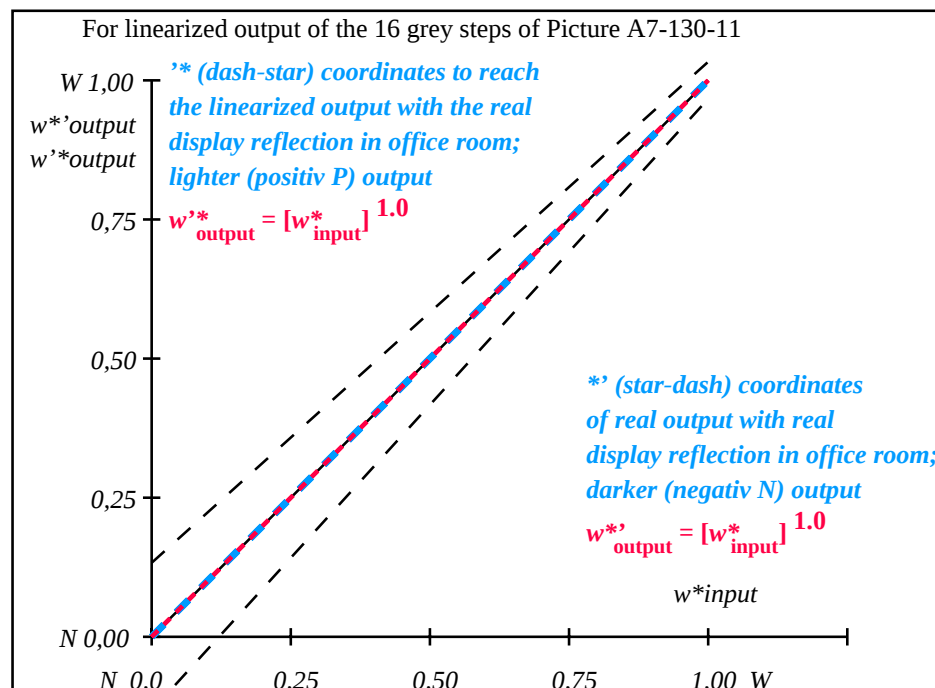

OE831-3N-130-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^{*}/Y_{intended}$ (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^{*}w^{*}w^{*}$ setrgb $g_P=1.0$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^{*}=l^{*}$ _{CIELAB, r} (relative)																
$w^{*}_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^{*}_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE830-7N, Picture A7-130-11: 16 visual equidistant L^{*} -grey steps; PS operator: $w^{*}w^{*}w^{*}$ setrgbcolor

OE83: In-output relation according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

input: $cmy0$ (-> $cmy0^{*}_{de}$) setcmyk
output 130-11: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE83/OE83L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta