

Immettere y uscita: Offset Reflective System ORS18a

Dati del dispositivo (d) o
colori elementari (e):


HIC*-

codice di tonalità per i colori

questa pagina:

$H^*_{100} = R00Y_{100}, R25Y_{100}, \dots, B75R_{100}$

ORS20a; dati atti CIELAB (a)					
H^*_{100}	$L^*=L^*_{100}$	a^*_{100}	b^*_{100}	C^*_{100}	h^*_{100}
R00Y_100_100	48.4	66.1	40.2	77.3	31
R25Y_100_100	56.8	48.0	50.5	69.6	46
R50Y_100_100	68.6	25.0	63.9	68.6	68
R75Y_100_100	80.6	4.8	77.2	77.3	86
Y00G_100_100	90.2	-9.6	88.2	88.7	96
Y25G_100_100	83.2	-18.4	79.9	81.9	102
Y50G_100_100	73.3	-31.7	62.7	70.2	116
Y75G_100_100	62.0	-49.7	43.2	65.8	139
G00B_100_100	55.8	-65.2	33.8	73.4	152
G25B_100_100	59.3	-50.3	-9.0	51.0	190
G50B_100_100	63.0	-30.5	-42.0	51.9	234
G75B_100_100	45.7	-5.7	-44.6	44.9	262
B00R_100_100	27.5	25.9	-47.3	53.9	298
B25R_100_100	38.3	52.6	-28.5	59.8	331
B50R_100_100	49.5	73.5	-9.0	74.0	353
B75R_100_100	48.9	69.3	12.9	70.4	10



%Gamma

$u^*_{rel} = 92$

%Regularità

$g^*_{H,rel} = 57$

$g^*_{C,rel} = 58$

ORS18a; dati atti CIELAB (a)					
name	$L^*=L^*_{100}$	a^*_{100}	b^*_{100}	C^*_{100}	h^*_{100}
R_18a	47.9	65.3	50.5	82.6	37
Y_18a	90.3	-10.2	91.7	92.3	96
G_18a	50.9	-62.8	34.9	71.9	150
C_18a	58.6	-30.3	-45.0	54.2	236
B_18a	25.7	31.0	-44.4	54.2	305
M_18a	48.1	75.2	-8.3	75.7	353
N_18a	18.0	0.0	0.0	0.0	0
W_18a	95.4	0.0	0.0	0.0	0
R_18a	39.9	58.7	27.9	65.0	25
Y_18a	81.2	-2.8	71.5	71.6	92
G_18a	52.2	-42.4	13.6	44.5	162
B_18a	30.5	1.4	-46.4	46.4	271

iscrizione TUB: 20160501-PI81/PI81LON1.TXT /PS
Applicazione per la misura dell'output su display

TUB materiale: code=thadua

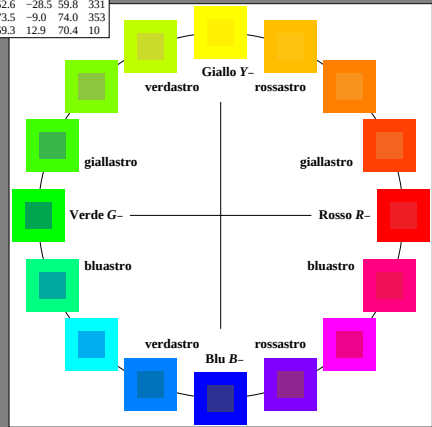
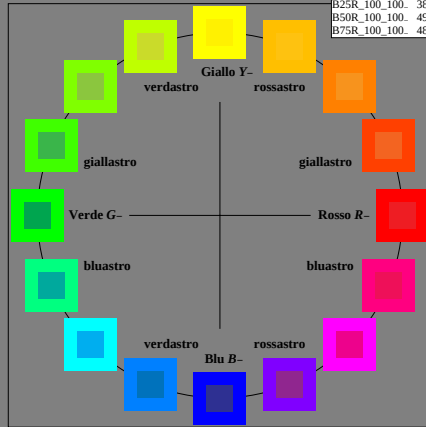


grafico TUB-PI81; cerchio delle tinte a 16 passi
grafico conformemente a DIN 33872, 3D=0, de=0, sRGB

Input: rgb/cmyk -> rgb/cmyk
Output: nessun cambiamento