

Entrada i salida: Offset Reflective System ORS18a

Datos del dispositivo (d) o
elemental (e) color:


HIC_e^*

código de tono para les colores
esta página:

$H_e^* = R00Y_e, R25Y_e, \dots, B75R_e$

ORS20a; datos adaptados CIELAB (a)

H_e^*	$L^*=L_a^*a_a^*$	b_a^*	$C_{ab,a}^*$	$h_{ab,a}^*$
R00Y_100_100_e	45.6	72.2	34.4	80.0
R25Y_100_100_e	50.5	59.2	51.6	78.6
R50Y_100_100_e	60.2	38.2	63.4	74.1
R75Y_100_100_e	70.9	17.9	75.9	77.9
Y00G_100_100_e	83.6	-3.6	90.4	90.4
Y25G_100_100_e	74.5	-25.0	74.3	78.4
Y50G_100_100_e	62.6	-40.9	53.8	67.6
Y75G_100_100_e	54.1	-55.5	37.5	67.0
G00B_100_100_e	50.6	-62.1	19.9	65.2
G25B_100_100_e	53.0	-48.6	-8.2	49.2
G50B_100_100_e	55.0	-36.2	-27.2	45.3
G75B_100_100_e	53.3	-19.8	-41.3	45.9
B00R_100_100_e	40.2	1.2	-40.6	40.6
B25R_100_100_e	28.1	23.4	-40.3	46.7
B50R_100_100_e	31.1	47.7	-29.1	55.9
B75R_100_100_e	41.4	70.4	-9.8	71.1



%Gama

$u_{rel}^* = 92$


%Regularidad

$g_{H,rel}^* = 57$

$g_{C,rel}^* = 58$

ORS20a; datos adaptados CIELAB (a)

name	$L^*=L_a^*a_a^*$	b_a^*	$C_{ab,a}^*$	$h_{ab,a}^*$
$R_{e, Ma}$	45.6	72.2	34.4	80.0
$Y_{e, Ma}$	83.6	-3.6	90.4	90.4
$G_{e, Ma}$	50.6	-62.1	19.9	65.2
$C_{e, Ma}$	55.0	-36.2	-27.2	45.3
$B_{e, Ma}$	40.2	1.2	-40.6	40.6
$M_{e, Ma}$	31.1	47.7	-29.1	55.9
$N_{e, Ma}$	24.3	0.0	0.0	0.0
$W_{e, Ma}$	95.6	0.0	0.0	0.0
$R_{e, CIE}$	39.9	58.7	27.9	65.0
$Y_{e, CIE}$	81.2	-2.8	71.5	71.6
$G_{e, CIE}$	52.2	-42.4	13.6	44.5
$B_{e, CIE}$	30.5	1.4	-46.4	46.4

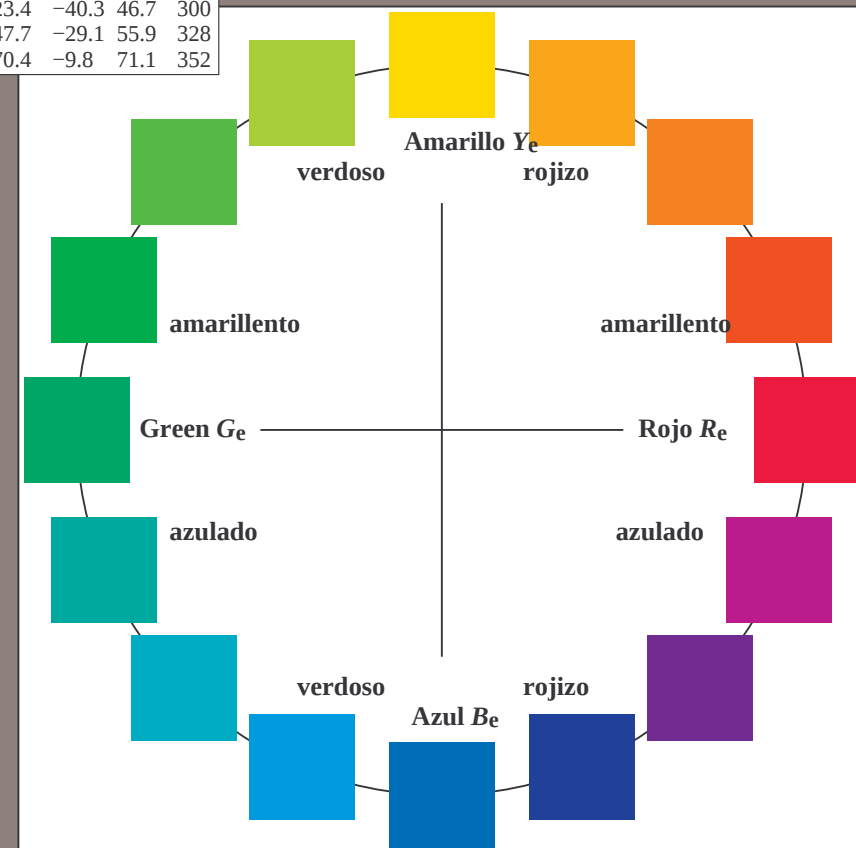

2-013131-L0 PS860-71

gráfico TUB-PS86; círculo de tono, 16 pasos
gráfico según a DIN 33872, 3D=0, de=1, cmy0

entrada: $rgb/cmyk \rightarrow rgb_e$
salida: transfiera a $cmy0_e$