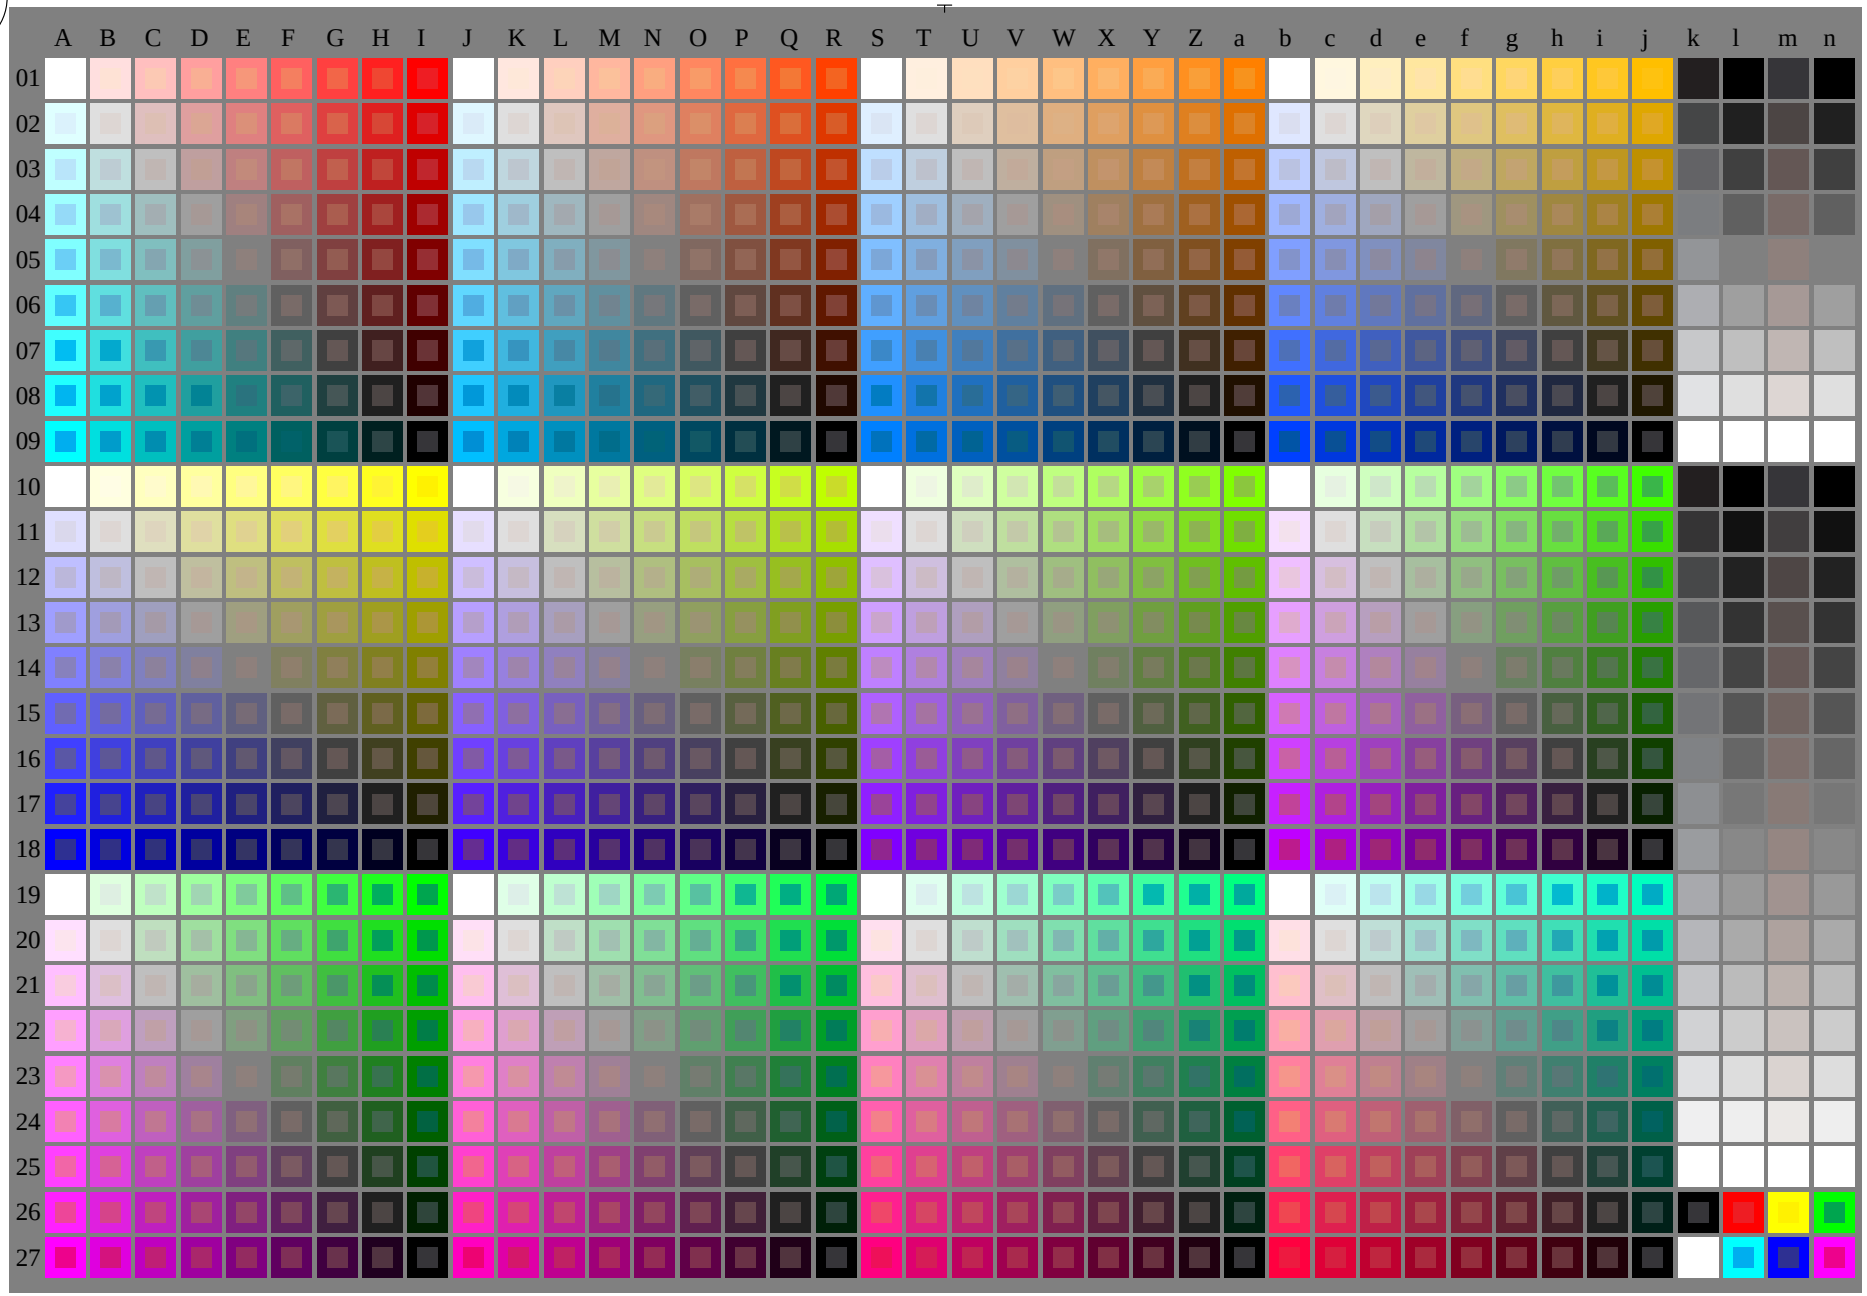

fei60−7n-030-0: Test chart 2o with 40x27=1080 colours; digital equidistant 9 or 16 step colour scales; Colour data in column (A−n): **rgb / cmy0 (A_j + k26_n27), 000n (k), w (l), nnn0 (m), www (n), colorml = 0**

TUB-test chart fei6; Test chart 2o_e0 with 40x27=1080 colours; DH
Digital equidistant 9 or 16 step colour scales

000n/w/cmy0/rgb
−>rgb*$_d$, 030-0:

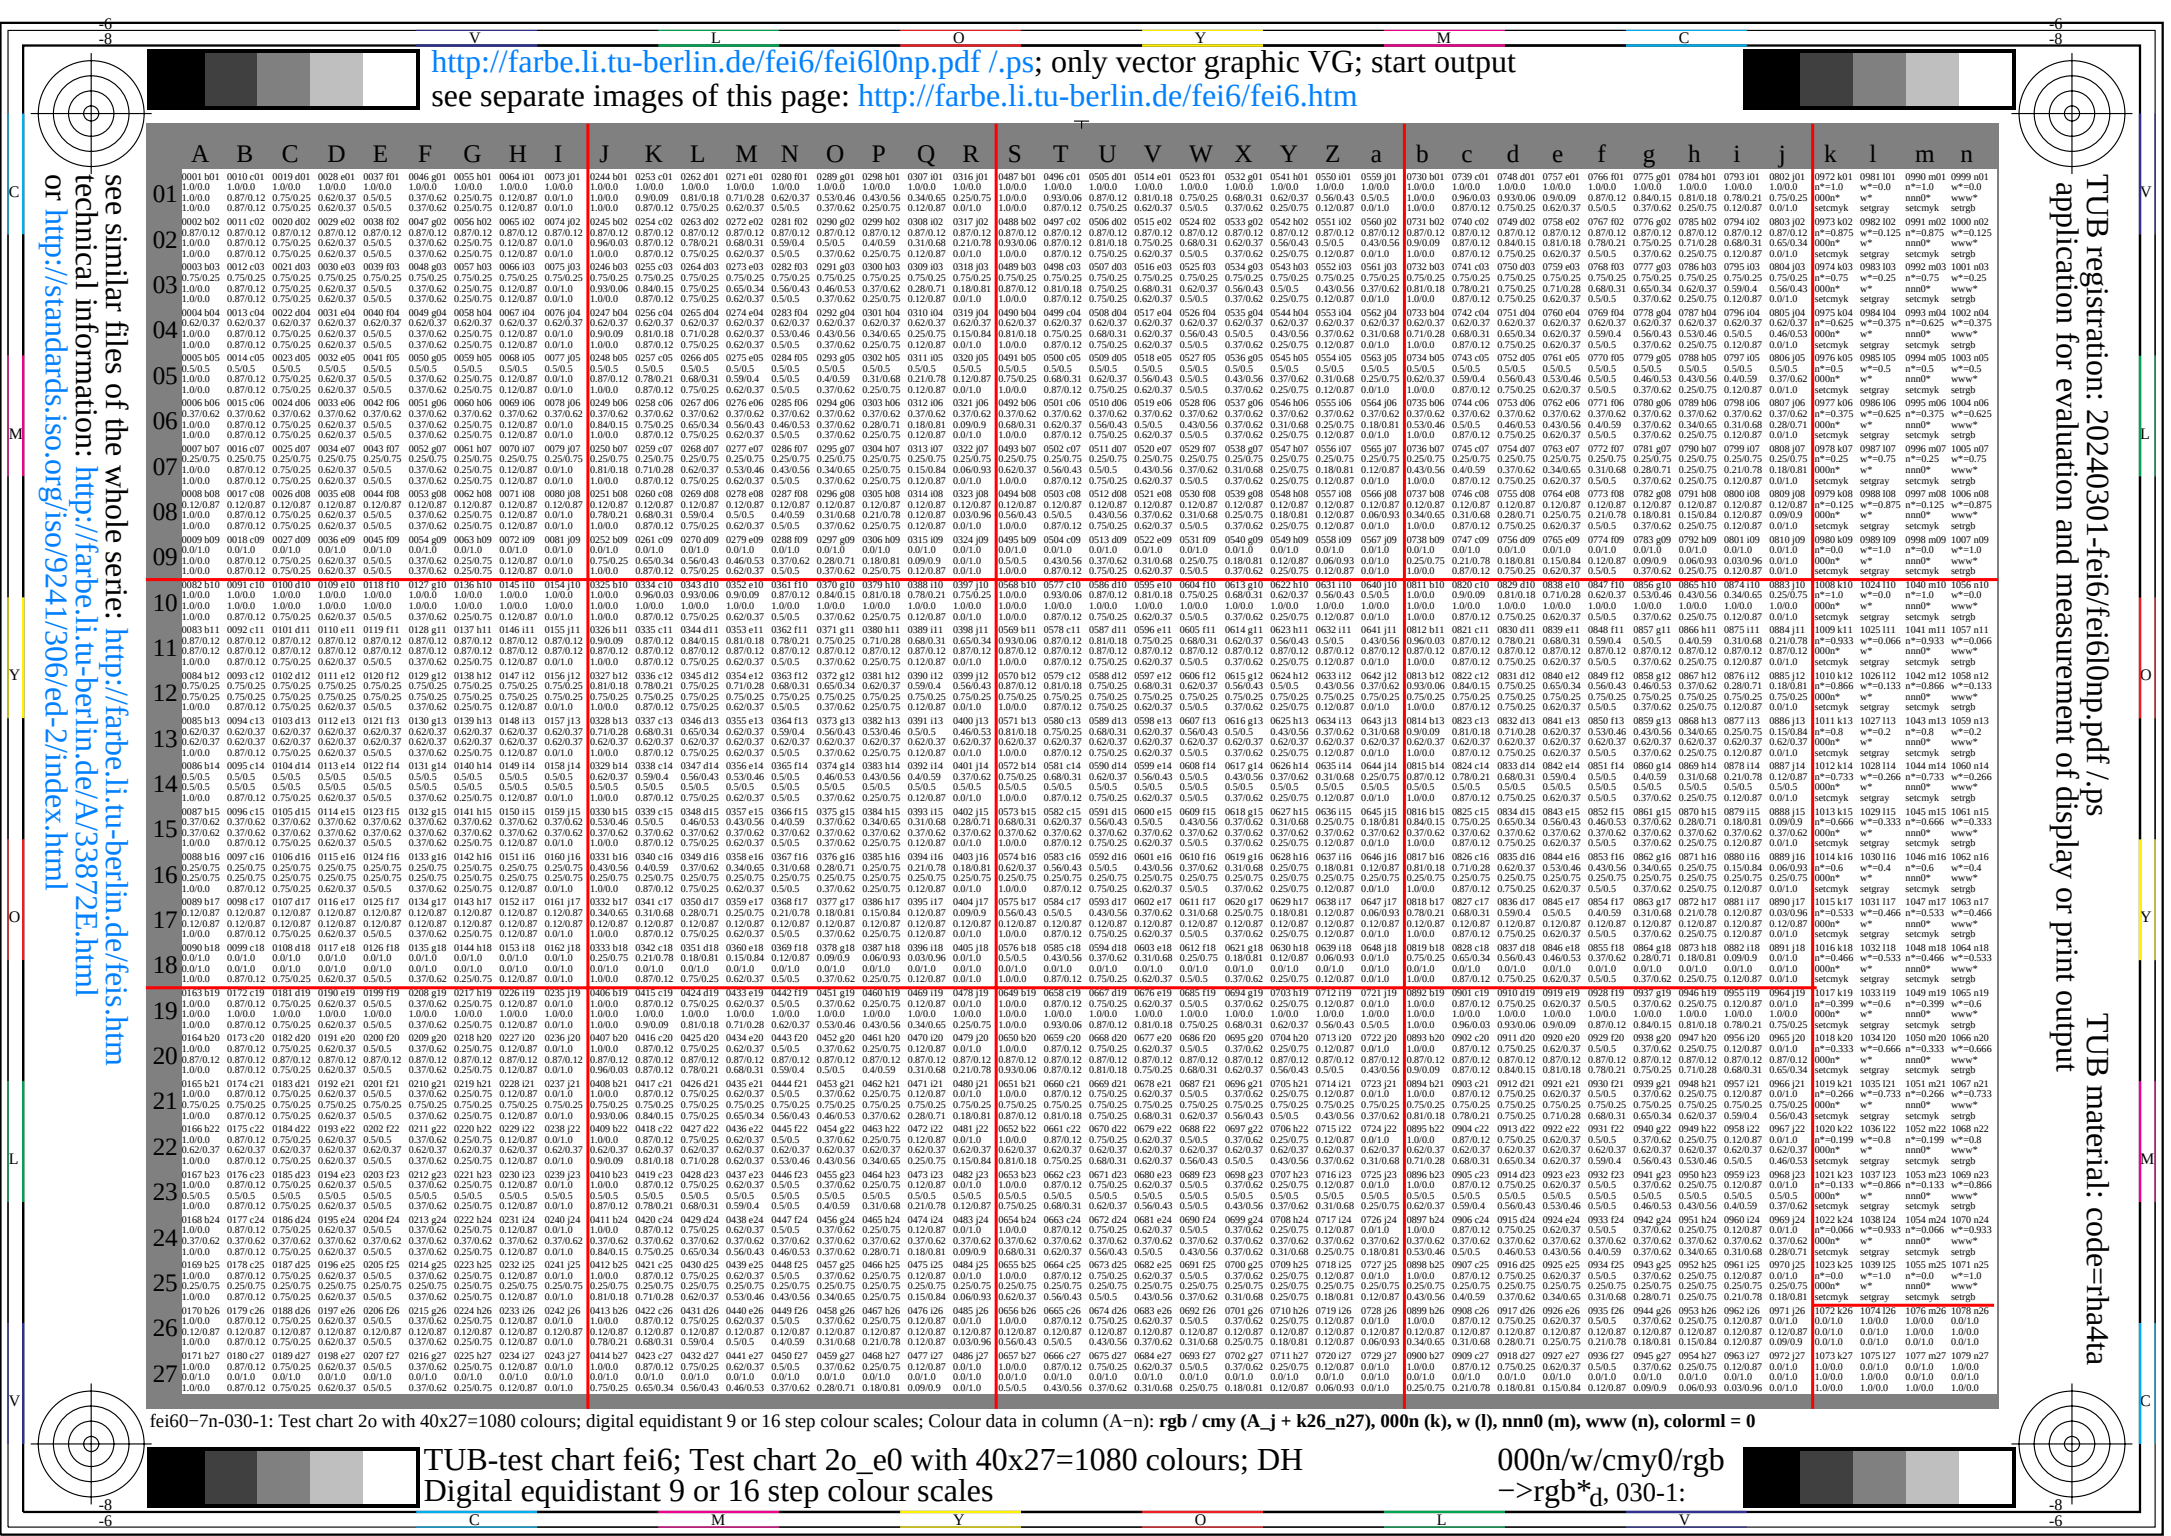
http://farbe.li.tu-berlin.de/fei6/fei6l0np.pdf /.ps; only vector graphic VG; start output
see separate images of this page: http://farbe.li.tu-berlin.de/fei6/fei6.htm
see similar files of the whole serie: http://farbe.li.tu-berlin.de/feis.htm
technical information: http://farbe.li.tu-berlin.de/A/33872E.html
or http://standards.iso.org/iso/92411/306/ed-2/index.html
TUB registration: 20240301-fei6/fei6l0np.pdf /.ps
application for evaluation and measurement of display or print output
TUB material: code=rha4ta
TUB-test chart fei6; Test chart 2o_e0 with 40x27=1080 colours; DH
Digital equidistant 9 or 16 step colour scales
000n/w/cmy0/rgb
->rgb*d, 030-1:
fei60−7n-030-1: Test chart 2o with 40x27=1080 colours; digital equidistant 9 or 16 step colour scales; Colour data in column (A−n): rgb / cmy (A_j + k26_n27), 000n (k), w (l), nnn0 (m), www (n), colorml = 0

i	LAB*ref			l*out	LAB*out			LAB*out/c−ref			ΔE*
1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.0	0.07	6.36	0.0	0.0	0.0	0.0	0.0	0.01
3	12.72	0.0	0.0	0.13	12.72	0.0	0.0	0.0	0.0	0.0	0.01
4	19.08	0.0	0.0	0.2	19.08	0.0	0.0	0.0	0.0	0.0	0.01
5	25.44	0.0	0.0	0.27	25.44	0.0	0.0	0.0	0.0	0.0	0.01
6	31.8	0.0	0.0	0.33	31.8	0.0	0.0	0.0	0.0	0.0	0.01
7	38.16	0.0	0.0	0.4	38.16	0.0	0.0	0.0	0.0	0.0	0.01
8	44.52	0.0	0.0	0.47	44.52	0.0	0.0	0.0	0.0	0.0	0.01
9	50.89	0.0	0.0	0.53	50.89	0.0	0.0	0.0	0.0	0.0	0.01
10	57.25	0.0	0.0	0.6	57.25	0.0	0.0	0.0	0.0	0.0	0.01
11	63.61	0.0	0.0	0.67	63.61	0.0	0.0	0.0	0.0	0.0	0.01
12	69.97	0.0	0.0	0.73	69.97	0.0	0.0	0.0	0.0	0.0	0.01
13	76.33	0.0	0.0	0.8	76.33	0.0	0.0	0.0	0.0	0.0	0.01
14	82.69	0.0	0.0	0.87	82.69	0.0	0.0	0.0	0.0	0.0	0.01
15	89.05	0.0	0.0	0.93	89.05	0.0	0.0	0.0	0.0	0.0	0.01
16	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.01
17	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.0	0.25	23.85	0.0	0.0	0.0	0.0	0.0	0.01
19	47.71	0.0	0.0	0.5	47.71	0.0	0.0	0.0	0.0	0.0	0.01
20	71.56	0.0	0.0	0.75	71.56	0.0	0.0	0.0	0.0	0.0	0.01
21	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
ΔE^*_{CIELAB} = **0.0**

Mean lightness difference (5 steps)
ΔL^*_{CIELAB} = **0.0**

Mean colour reproduction index: $R^*_{ab,m}$ = **100**

fei60−3n-030-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

For linearized output of the 16 grey steps of Picture A7-030-2

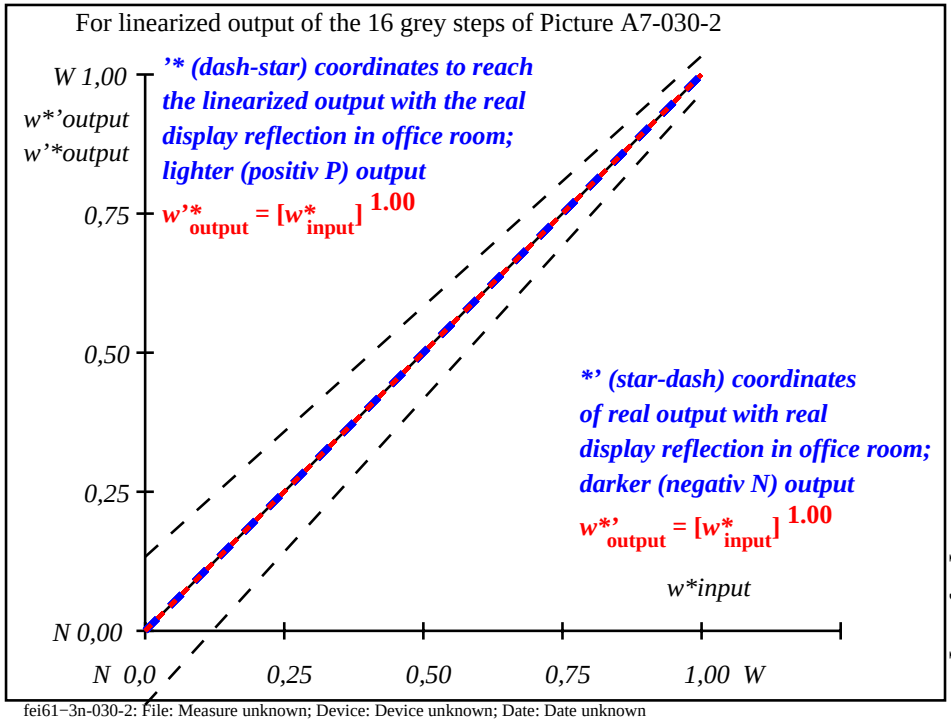

fei61−3n-030-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

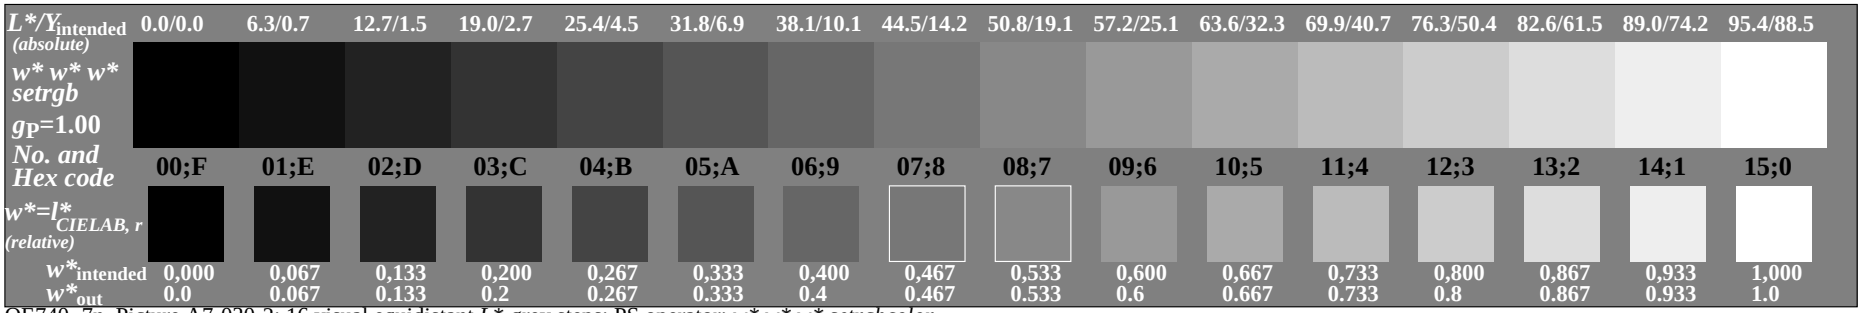

OE740−7n, Picture A7-030-2: 16 visual equidistant *L**-grey steps; PS operator: *w* w* w* setrgbcolor*